



7 Ton Low-Pro Tilt Bed Trailer

Model: 720T7TT

GVWR: 14,000 lbs.

Main Frame & tongue: 6" structural channel (8" I-Beam gooseneck package)

Inside frame cross members: 3" channel (16" on center)

Bed Main tilt frame: 6" channel

Tilt Bed: 16' wood (18' available)

Front Stationary: 4' wood

Cylinder: 2" bore gravity feed self-dampening cylinder w/ reservoir & flow-speed control

Tongue: 5' (wrap under double frame)

Width: 82" deck & loading width (77" wide tilt bed)

Sides: stake pockets and rub rail

Jack: Ram 12K drop leg

Coupler: adjustable channel mount, 2 5/16" ball or 3" pintle eye

Axles: (2) 7,000 lb. spring suspension, EZ lube with electric brake

Wheels: 16" single, 8 lug

Tires: 235 80 R 16 E, 10 ply radials

Spare Tire: mounted front bulkhead

Fenders: 1/8" checker plate

Floor: 2" x 8" Pressure treated pine

Storage: mesh bottom floor in tongue (w/ locking lid)

Breakaway kit: 12 Volt battery, with charge wire and LED test light

Safety chains: (2) 3/8" w/ hook and closures

Wiring: run in conduit tubing with junction boxes and neatly spliced

Lights: LED (meets all DOT requirements)

Paint: cleaned, primed and painted 100% Black (optional color)

Warranty: 1 year with MSO provided



FEATURE & HIGHLIGHTS




HD DOUBLE STACK CHANNEL FRAME



*EASY LOAD FULL WIDTH LOAD ANGLE
HD "B&A BUILT™" FENDERS*



*HYDRAULIC GRAVITY FEED CUSHION
CYLINDER W/ CONTROL SPEED*

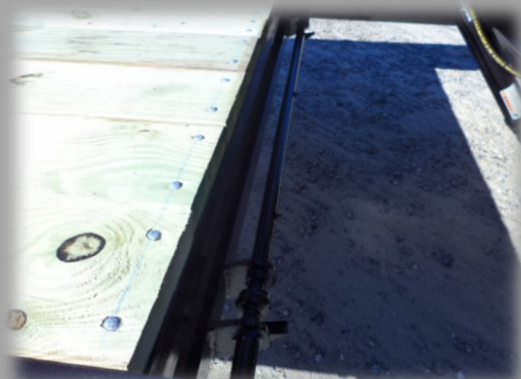

*"B&A DUAL POINT LATCH
LOCKING SYSTEM™"*



*LOCKING LID TOOL TRAY, 12K JACK
SEALED WIRING, LED LIGHTS*



GOOSENECK PACKAGE OPTION