


APPROACH PLAN

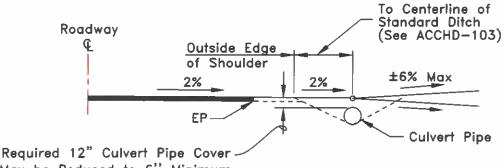

Required 12" Culvert Pipe Cover (May be Reduced to 6" Minimum for Residential Driveways Only)

APPROACH SECTION

APPROACH TABLE

	Appr Width*		Min
APPROACH TYPE	Min	Max	Radius
Farmyard Field	20'	40'	20'
Residential ⁵ (Rural Roadway)	20'	30'	10'
Residential ⁵ (Subdivision) Or Roadway	20' 15'	36'	0' 5'

APPROACH STRUCTURAL SECTION

- 2.5" Surfacing (Optional)
 - 6" Base
 - 9" Subbase

* Does not include required 2' gravel shoulder on each side of approach.

STANDARD RESIDENTIAL APPROACH SERVING ONE (1) OR TWO (2) PROPERTIES N.T.S.

NOTES:

- 1. Approach spacing shall conform to Section 3000 of the ACCHD Manual.
- 2. Ingress/Egress by forward motion only.
- 3. Culvert pipe shall be 12" min. diameter. Culvert pipe shall extend to the intersection of the ditch line and the 4:1 approach foreslope. Pipe material shall be either 0.064" thick corrugated steel, 0.060"corrugated aluminum or Class V reinforced concrete.
- 4. Subdivision roads are defined as roads that primarily provide access to adjacent lots or parcels, do not serve as collector roads, are not located on section or quarter section lines and have a posted speed of 25 mph or less. All other roads shall be considered rural roads for application of approach standards.
- 5. Serving One (1) or Two (2) Residences Only.

REVISED 01/22

ASSOCIATION OF CANYON COUNTY HIGHWAY DISTRICTS CANYON COUNTY, IDAHO

STANDARD RESIDENTIAL APPROACH

STANDARD DRAWING ACCHD-105