


TRINITY

Segmental Block Wall System

MANUFACTURED IN COLUMBUS, MISSISSIPPI

Serving AL, FL, GA, MS and TN

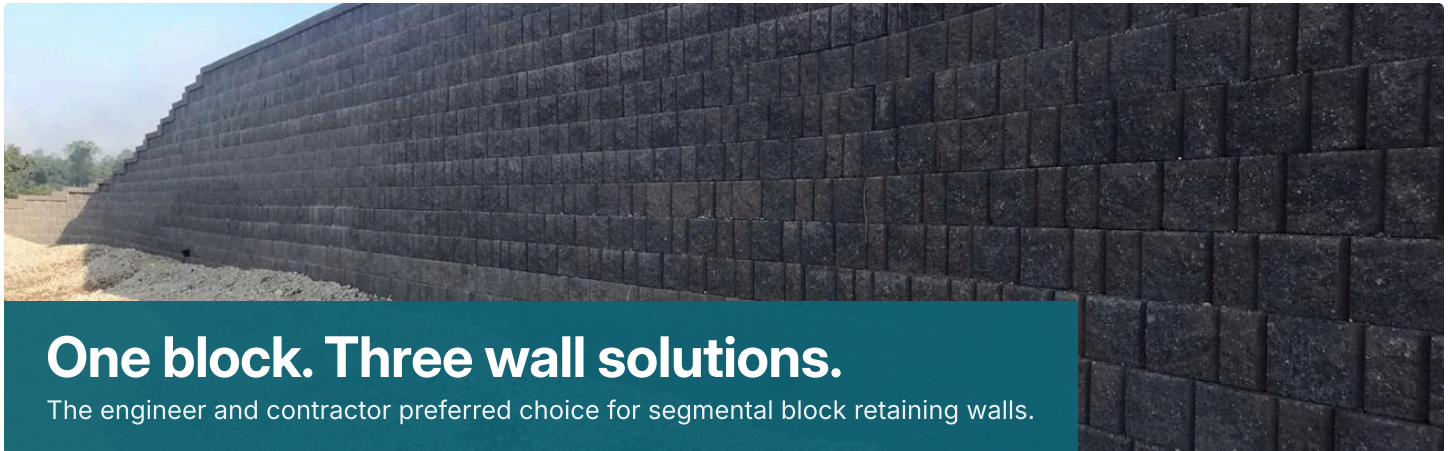

One block. Three wall solutions.

The engineer and contractor preferred choice for segmental block retaining walls.

TRINITY STANDARD UNIT

Size	8" H × 18" W × 12" D
Coverage	1 sq ft of wall face per block
Weight	Approx. 75 lb per block
Setback	5.4° (3/4" per course)
Connection	Pinless; mechanical (positive) geogrid connector available

WHY CONTRACTORS CHOOSE TRINITY

- Pinless system
- Flat base for quick leveling
- Vertically aligned cores for efficient stone filling
- Rear hand holds assist in lifting
- Multiple face options
- Over 3 million square feet installed

SHIPPING

32

blocks per pallet
(32 sq ft of wall)

48

caps per
pallet

~575

sq ft of wall per
flatbed load*

*Approx. 18 pallets per tractor-trailer flatbed. Exact load confirmed with your quote.

ONE BLOCK. THREE SOLUTIONS.

1. Frictional

Conventional geogrid creates an MSE (Mechanically Stabilized Earth) structure.

2. Structural

Where excavation is limited but subterranean encroachment with earth anchors is acceptable.

3. Gravity Mass

Pervious no-fines concrete where excavation or encroachment is limited.

COLORS



Grey



Buckskin

TRINITY IN THE FIELD



ENGINEERING SUPPORT

Estimating charts for no-surcharge, 250 PSF surcharge and 3:1 backslope conditions are available on request. For stamped final designs by a professional engineer, call Earth Wall Products at **678.594.3451**.

Information compiled by Earth Wall Products, LLC. Final determination of suitability for the use contemplated and its manner of use are the sole responsibility of the user. Final structural design and analysis shall be performed by a qualified engineer. Trinity is used under license from Earth Wall Products, LLC.



**FIFTEEN SPRINGS
HARDSCAPE PRODUCTS**

QUALITY EXPERIENCE COMMITMENT

423.658.8403

info@fifteensprings.com · www.fifteensprings.com

CALL FOR A FREE QUOTE