

Professional Installation Recommended

Cat Security™



by Cap City Muffler

Toyota Prius Generation C 2012 -2019

Thank you for your purchase. With the installation of this Cat Security™ plate, we hope that you will help prevent any further catalytic converter theft. The included hardware kit will help further secure your catalytic converter and deter thieves.


Package Contents:

- (1) Aluminum Security Plate
- (1) Front Security Brace
- (6) 3/16" Rivets - long
- (6) Security Screws
- (4) Self-Tapping Screws
- (2) Washers
- (2) Tamperproof Security Bolts
- (2) Lock Nuts


Professional Installation Recommended

Toyota Prius Cat Security™ Install Instructions (Gen C)

Step 1 - The front support brace is to be installed first. Using the tamper proof bolts, washers and lock nuts supplied, install the brace. The bolts will insert through the holes shown. The washers/lock nuts are installed on the other side.

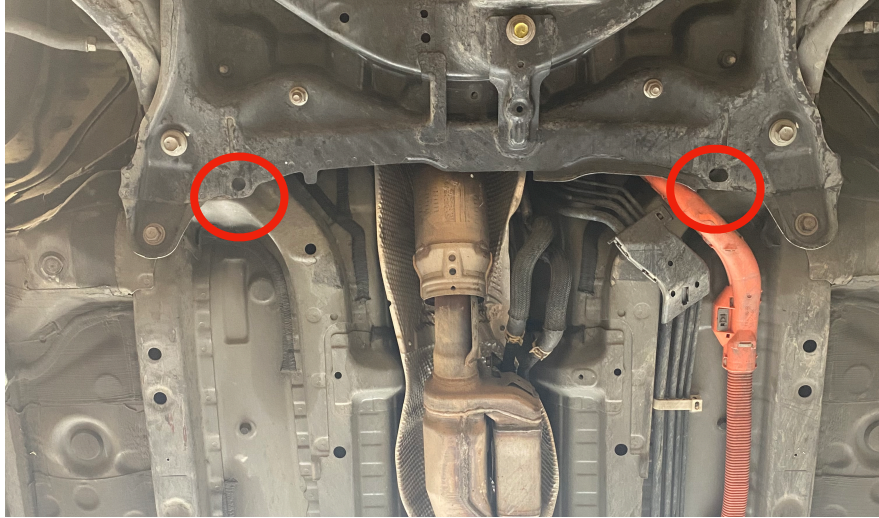

Before tightening the security bolts firmly down, ensure the support brace is pulled back as far as possible. The support brace and the subframe need to be as flush as possible. The installed brace should look like the picture below.

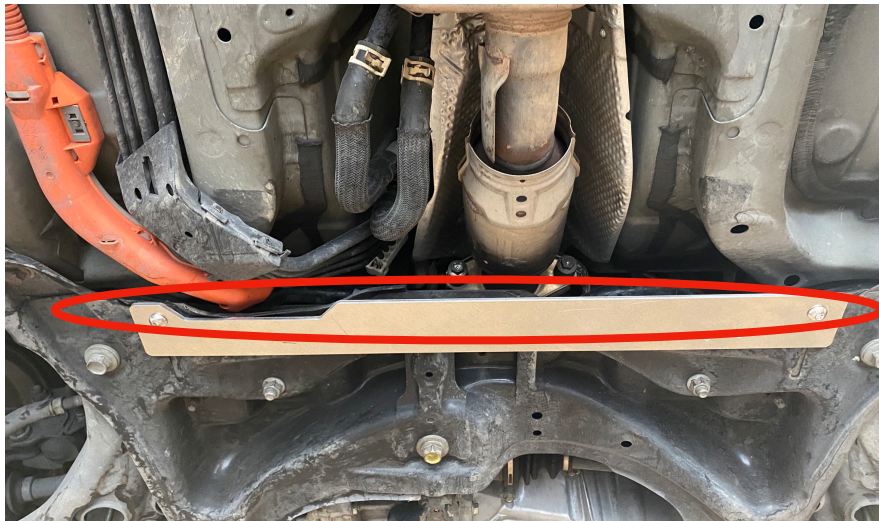


Professional Installation Recommended


Step 2 - Once the support brace is secured, install the main Cat Security™ shield by doing the following. Hold the shield up, aligning the front with the support brace. Install the 4 self-tapping screws in the locations shown.

NOTE: The front two self-tapping screws will not be removed

Cat Daddy Pro Tip Before installing the shield, bend the front long perforated tab into a 90° bend. This action will help keep the Cat Security™ shield square. To help with ease with anti-rattle, place a slight bend in the entire shield by grabbing the outsides and pulling towards you with a knee or foot placed in the middle.

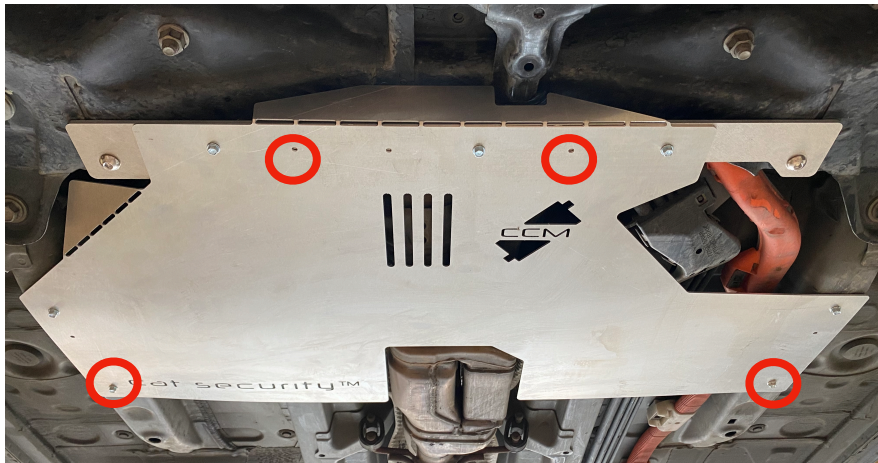


Step 3 - Using a 3/16" drill bit, drill holes in the front support brace as shown and install the (2) 3/16" long rivets. Drill out the sides as show and install the remaining (4) rivets.

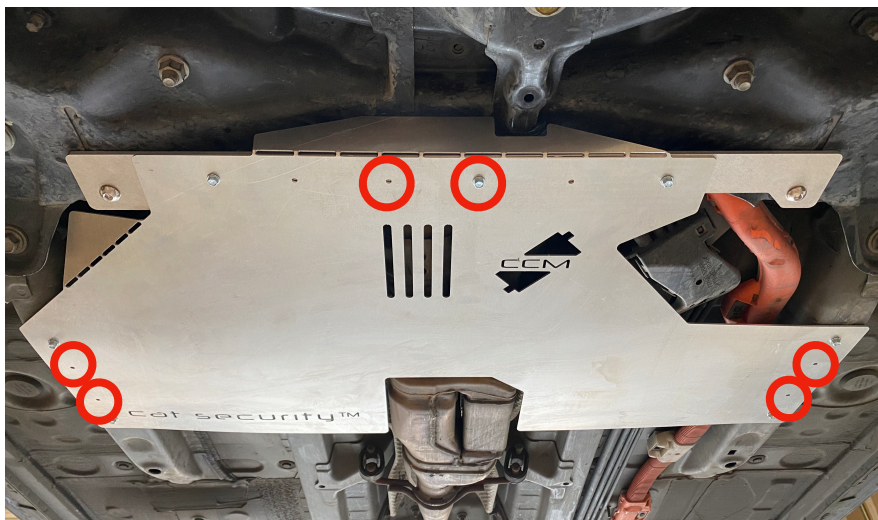

Professional Installation Recommended

Step 4 - Install the security screws in the corners of the Cat Security™ shield. You can use the self-tapping screws to make the holes for the security screws, if you do not have a drill bit. Install security screws and fold the small tab up to complete the installation.

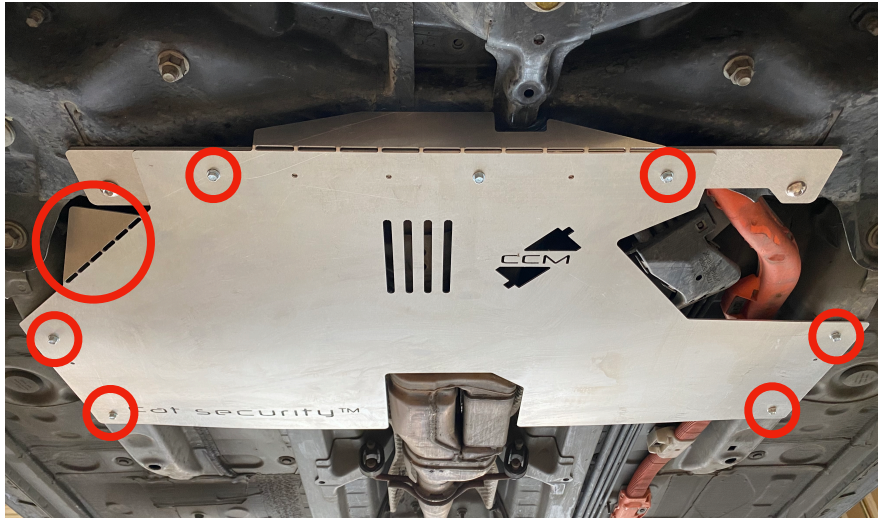

Last Step: Install the Cat Security™ stickers on the two rear windows and back window of your Prius to let people know your car is protected.

Wasn't that an easy install? Think of what becoming an installer could do for your bottom line! Give the Cat Daddy a call or email today to get the best pricing and add some serious revenue to your shop.

Joseph Brodник - Director of Sales
joseph@getcatsecurity.com
(916) 926-2105