

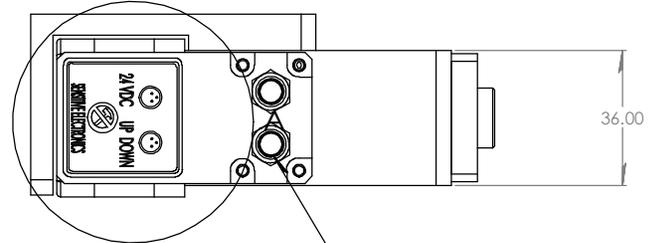


BASE MOUNTING

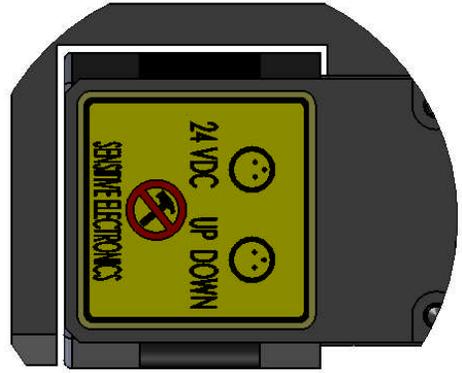


2 CONNECTORS
M8 MALE 3P PICO

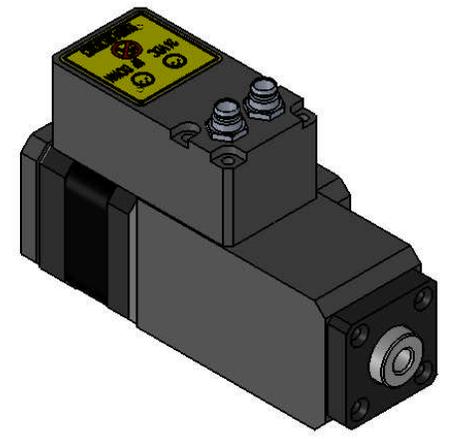


DETAIL A
SCALE 2 : 1


(4) M4 x 0.7 6mm DEEP

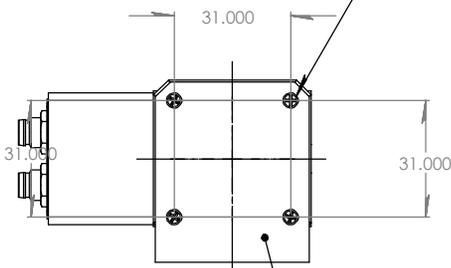

BASE MOUNTING

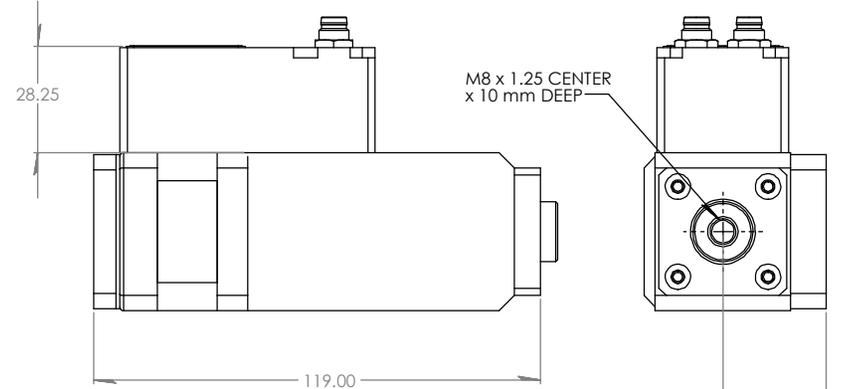

M8 x 1.25 CENTER
x 10 mm DEEP

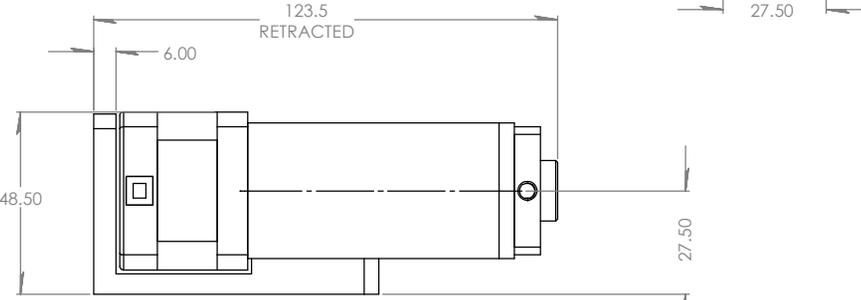

ACTUATION TIME = 1000ms RETRACT / 375ms EXTEND
THRUST CAPACITY 7Kg
12mm STROKE


MOTOR, POWER RATING (WATTS), VOLTAGE, CURRENT (MAX AND OPERATING)

MOTOR SIZE: NEMA17 (42mm FRAME)
RATED AMPS: ~1.0A WHEN MOVING, ~0.3A IDLE
INPUT VOLTAGE: 9-30VDC (24VDC TYPICAL)

12mm RETRACT TIME: 1000MS
12mm EXTEND TIME: 375MS

CONNECTIONS:
MICRO 3-1 POWER (+24VDC, OVDC)
MICRO 3-2 SIGNAL

NOTE: INTERFACE PLATE IS NOT SEALED

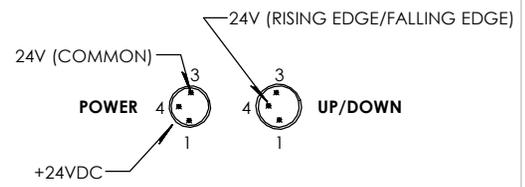

**WIRING DIAGRAM
MALE END VIEW**

THIS PRINT SUPERSEDES ANY OTHER DOCUMENT INCLUDING ELECTRONIC MODELS SUPPLIED BY MECHATRONIC TECHNIQUES. THE SPECIFICATIONS AND DATA ON THIS PRINT ARE BELIEVED TO BE ACCURATE AND RELIABLE. HOWEVER, IT IS THE RESPONSIBILITY OF THE PRODUCT USER TO DETERMINE THE SUITABILITY OF THE COMPONENT FOR THEIR SPECIFIC APPLICATION. WHILE DEFECTIVE PARTS WILL BE REPLACED WITHOUT CHARGE WITHIN THE PRODUCT WARRANTY PERIOD, NO LIABILITY IS ACCEPTED BEYOND SUCH REPLACEMENT.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MECHATRONIC TECHNIQUES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MECHATRONIC TECHNIQUES IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES: DRAWN: TEC CHECKED: ENG APPR: MFG APPR:		NAME: DATE:	MECHATRONIC TECHNIQUES INC.
ANGULAR ±0.50 DEG NO DECIMAL PLACE ±1.500 ONE PLACE DECIMAL ±0.750 TWO PLACE DECIMAL ±0.381 THREE PLACE DECIMAL ±0.127		TITLE:	LIFT ACTUATOR
INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL:		Q.A. COMMENTS:	SIZE DWG. NO. REV C 7101026 B
NEXT ASSY	USED ON	FINISH	SCALE: 1:2 WEIGHT: SHEET 1 OF 1
APPLICATION		DO NOT SCALE DRAWING	