



Rope & Cordage



072116

Table of Contents

Rope Product Package.....	4	Mason's Line - Nylon.....	26
KingCord® Packaging.....	4	Twisted Mason Line	27
Choosing the Right Rope	5	Paracord 550 - Nylon	28
Rope Selection Guide	5	Paracord 550 - Nylon - Diamond Braid.....	29
Rope Construction Guide	6	Survival Bracelet (Paracord 550 Bracelet)	29
Rope Specialty Products	7	Polyester	30
Rope with Accessories.....	7	Diamond Braid	31
Innovative Packaging Solutions	8	Twisted Rope.....	31
Rope Merchandising	9	Smooth Braid	32
Polypropylene.....	12	Clothesline	33
Diamond Braid	13	Diamond Braid	34
Twisted Rope.....	14	Clothesline - PVC Coated Wire.....	34
Smooth Braid	15	Cotton.....	35
Hollow Core.....	15	Cord Venetian Blind	36
Camouflage Ropes - Polypropylene	16	Diamond Braid	36
Camouflage Rope	17	Smooth Braid	36
Reflective Ropes - Polypropylene	18	Twisted Rope.....	37
Reflective Rope.....	19	Manila	38
Marine Line	20	Twisted Rope.....	39
Anchor Line - Polypropylene.....	21	Sisal	40
Anchor Line - Nylon.....	21	Twisted Rope.....	41
Dock Line - Nylon.....	22	Jute	42
Nylon	23	Twine Rope	43
Diamond Braid	24	Best Value Commitments.....	46
Twisted Rope.....	24	Terms & Conditions.....	47
Smooth Braid	25		
Hobby Line	25		



Rope Product Package

MIBRO's KingCord packaging is color-coded to help quickly identify both the rope's material and the rope's construction type.

1. Choose Material

Nylon

Shock absorbing

- Absorbs shock of impact loads
- High strength

Polypropylene

Floats

- Will not sink and foul propellers
- Moderate stretch

Polyester

Abrasion Resistant

- Heavy wear applications
- Low stretch

Clothesline

Abrasion Resistant

- Heavy wear applications
- Low stretch

Cotton

Soft & Flexible

- Natural fiber
- Superior knot holding

Jute/Manila/Sisal

Biodegradable

- Natural fiber
- Manila - Strongest natural fiber

2. Choose Construction

Twisted

- Good strength / weight ratio
- Economical

Smooth Braid

- Firm, round finish
- Moves smoothly under load

Hollow Core

- Easy to splice
- Lightweight

Double Diamond Braid

- Easy to handle
- Holds knots well

Diamond Braid

- Easy to handle
- Holds knots well



KINGCORD® Packaging



Coil



Hank



Holder



Reel



Reloadable Reel



Spool



Twine Cutter

• Type of packaging varies, please see complete details for each category

Choosing the Right Rope

Rope Selection Guide

	Polypropylene	Nylon	Polyester	Clothesline	Cotton	Manila/Sisal/Jute
						
★★★★ Best ★★★ Good ★★ Average ★ Not Recommended						
Strength	★★★	★★★★	★★★	★★★	★	★
Shock Load Ability	★★★	★★★★	★★	★★	★	★
Floats or Sinks in Water	Floats	Sinks	Sinks	Sinks	Sinks	Sinks
Melting Point	330°F	480°F	500°F	500°F	Burns	Burns
Abrasion Resistance	★★	★★★	★★★★	★★★	★	★
Resistant to Sunlight	★★	★★	★★★★	★★★★	★★★★	★★★★
Resistant to Rot and Mildew	★★★★	★★★★	★★★★	★★★★	★	★
Resistant to Oil and Gas	★★★★	★★★★	★★★★	★★★★	★	★
Flexing Endurance	★★★	★★★★	★★	★★	★	★
Store Wet or Dry	Wet or Dry	Wet or Dry	Wet or Dry	Wet or Dry	Dry Only	Dry Only
Stretch Resistance	★★	★	★★★★	★★★★	★★★★	★★★★





Reference Chart

Trade Size	Imperial Size
#3	3/32"
#4	1/8"
#4.5	9/64"
#5	5/32"
#6	3/16"
#7	7/32"
#8	1/4"
#10	5/16"
#12	3/8"

• This guide is designed to show general uses/guidelines for rope only. The uses will vary based on the size of the rope being used. Please refer to the specific safe work load on each product. If you are still unsure expert advice should be sought for specific need.

Rope Construction Guide

Construction Guide

	Diamond Braid	Double Diamond Braid	Twisted	Smooth Braid	Hollow Core
					
					
Best ★★★★★ Good ★★★★ Average ★★★ Difficult ★					
Spliceable	★	★	★★	NO	★★★★
Flexibility	★★	★★	★★	★★★★	★★★★★
Flattens under Load	YES	NO	NO	NO	YES
Rotates under Load	NO	NO	YES	NO	NO
Knot-holding Ability	★★★★★	★★★★★	★★	★★★	★★★★

Comparisons

Solid Braid	=	Smooth Braid
Sash Cord	=	Cotton or Polypropylene Cord
Derby Rope	=	Solid/Smooth Braid polypropylene
Double Braid is NOT the same as Diamond Braid		
Seine Twine	=	Braided Mason's Line
Mason's Line	=	Twisted Twine
Maypole	=	Diamond Braid

• This guide is designed to show general uses/guidelines for rope only. The uses will vary based on the size of the rope being used. Please refer to the specific safe work load on each product. If you are still unsure expert advice should be sought for specific need.

Rope Specialty Products

Rope with Accessories

At MIBRO we have a variety of specialty products available that can enhance your product assortment through promotional opportunities or distinctive standard listed items. Whether it's an added feature like a snap or thimble or unique features like our patented twine cutter we can help fulfill your customers' needs.



Includes Black Plastic Rope Thimble

(448921 on page 24)

- Spliced rope thimble allows secure line instead of tying knots
- Creates an added value item with purchase



Includes 3" Galvanized Security Snap

(448941BG on page 15)

- Spliced Galvanized Security Snap makes it easy to secure the rope
- Creates an added value item with purchase



Marine Nylon Dock Line

(300871, 300871BG on page 22)

- Includes a 10" eye splice
- Shock absorbing



Rope Specialty Products

Innovative Packaging Solutions



Twine Cutter

(Various on pages 27, 37, 43)

- User-friendly
- Safe
- Familiar design makes it easy to use
- Neat, visually appealing packaging
- Great promotional item
- Unique patented product



Reloadable Reel

(310361 on page 27)

- Appeals to DIYs & Contractors
- Non-slip ergonomic handles
- Finger slot for easy rewinding
- Clip (top) and bolster (bottom) keep twine in place
- Great promotional item



Promo Rope-Tag

- Removal of label allows for great promotional rope
- Tag still offers all of the important product information
- Can be created on almost any sku

Rope Merchandising

MIBRO's KingCord merchandising options make it easy for consumers to quickly identify and purchase the right rope for their needs. Point of purchase signage establishes a clear and concise color coding protocol that is carried down to POP information at the shelf level and to the packaging on each individual sku.

Our display boxes, acrylic system, wire baskets or clip covers along with headers keep the display neat, easy to shop and easy to re-stock.

Display Header



Display Boxes



NOTE:

All products shipped in display boxes are marked with an asterisk (*)

Rope Merchandising

Wire Basket Planogram



Wire Basket

Part#	Description
507831	Interlocking Wire Front 4"L X 3"H
507841	Interlocking Wire Dividers 16"L X 3"H
507851	Interlocking Wire Dividers 16"L X 5"H
517022	2¾"L X 3½"H Transparent Label Cover Clip
517021	5½"L X 3½"H Transparent Label Cover Clip

- Other divider lengths available upon request



Reels

Part#	Description
RA300000	Rope Trough Rack 4 ft. w/ 9 Sliders
RA400000	Rope Trough Rack, 3 ft. w/ 4 Sliders
312130	Sliders for RA300000 4' Rope Rack
599940	Bulk Grommets
312150	Electric Rope Cutter
312140	Rope Burner Cover

Rope Merchandising

Acrylic Dividers



Part#	Description
997880	4' Shelf Fronts
997860	3' Shelf Fronts
DIV1600*	16" Dividers
DIV1800*	18" Dividers
DIV1900*	19" Dividers
DIV1000	20" Dividers
DIV1100	22" Dividers
NL1020	Nylon Nails

(*) Select divider lengths available upon request

Bread Box

Part#	Description
997120	Bread Box Rack



Polypropylene

Polypropylene is a general purpose synthetic rope. It is lightweight and does not absorb water, which allows the rope to float and makes it particularly useful for marine applications and pools. It has medium stretch characteristics that allow the rope to slowly stretch. Ultraviolet (UV) light inhibitors have been added to prevent degradation. Relative to other synthetic ropes, polypropylene is poor at holding knots and has limited abrasion resistance.

⚠ Warning: Do not use for overhead lifting, support of human weight or athletic equipment, Do not exceed safe working load detailed on the package. Shock loads (stress, jerk) can reduce working loads by as much as 33%. Never stand in line with ropes under tension; rope (especially nylon) may recoil or snap back. Knots reduce rope strength by 40%. Replace the rope if there are signs of wear, such as broken fibers.



Polypropylene Ropes Usage



Polypropylene Rope Packages



Hank



Rope on Holder



Spool



Reel



Display Box

Polypropylene

Diamond Braid



Part#	Size (in.)	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
300841BG	# 5 5/32	100	30	Black / Blue / Yellow	Hank	44	20	15	6
301761	#18	250	76	Yellow	3" Spool	4	2	42	1*
301761BG	#18	250	76	Yellow	3" Spool	4	2	28	3
448840BG	1/8	50	15	Green / Brown / Black	Hank	40	18	12	1
300011	1/4	100	30	Black with Red / White & Red with Blue / White	Hank	95	43	8	1*
300011BG	1/4	100	30	Black with Red / White & Red with Blue / White	Hank	95	43	6	4
400031	1/4	100	30	Black with Red / White & Red with Blue / White	Large Holder	95	43	10	1*
400031BG	1/4	100	30	Black with Red / White & Red with Blue / White	Large Holder	95	43	6	2
300021	3/8	100	30	Green with Red / Yellow & Blue with Red / White	Hank	244	111	6	1*
300021BG	3/8	100	30	Green with Red / Yellow & Blue with Red / White	Hank	244	111	5	2
300041	3/8	75	23	Green with Red / Yellow & Blue with Red / White	Hank	244	111	6	1*
300041BG	3/8	75	23	Green with Red / Yellow & Blue with Red / White	Hank	244	111	5	3
301491	3/8	50	15	Green with Red / Yellow & Blue with Red / White	Hank	244	111	8	1*
301491BG	3/8	50	15	Green with Red / Yellow & Blue with Red / White	Hank	244	111	12	3
301791	3/8	50	15	Blue with Red / White	Hank	244	111	12	1*
301791BG	3/8	50	15	Blue with Red / White	Hank	244	111	12	2
448831BG	3/8	15	5	Green with Red / Yellow & Blue with Red / White	Hank	244	111	10	4
302431	1/2	50	15	Green, Red and Yellow	Coil	308	139	2	4
302461	1/2	50	15	Green, Blue & White or Blue, Red and White	Coil	308	139	2	12

* In Display Box

Polypropylene

Twisted Rope



Part#	Size (in.)	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
301671	5/64 - 2 ply	1000	305	Blue and White	Spool	22	10	4	6
301781	3/16	50	15	Yellow	Hank	72	33	50	1*
301781BG	3/16	50	15	Yellow	Hank	72	33	10	10
300341	1/4	50	15	Yellow	Hank - Plastic Loop	113	51	6	7
300341BG	1/4	50	15	Yellow	Hank - Plastic Loop	113	51	7	8
301771	1/4	50	15	Yellow	Hank	113	51	24	1*
301771BG	1/4	50	15	Yellow	Hank	113	51	7	8
301821	1/4	50	15	Tan	Hank	113	51	24	1*
301821BG	1/4	50	15	Tan	Hank	113	51	7	8
300051	1/4	100	30	Yellow	Hank	113	51	10	1*
300051BG	1/4	100	30	Yellow	Hank	113	51	12	2
301811	1/4	100	30	Tan	Hank	113	51	12	1*
301811BG	1/4	100	30	Tan	Hank	113	51	12	2
300521	1/4	1200	366	Yellow	Reel	113	51	1	1
300061	3/8	50	15	Yellow	Hank	244	111	6	1*
300061BG	3/8	50	15	Yellow	Hank	244	111	5	6
301741	3/8	50	15	Tan	Hank	244	111	15	1*
301741BG	3/8	50	15	Tan	Hank	244	111	5	6
302111	3/8	50	15	Black / Orange with Tracer	Hank - Truck Rope	244	111	6	1*
302111BG	3/8	50	15	Black / Orange with Tracer	Hank - Truck Rope	244	111	5	6
402101	3/8	50	15	Black / Orange with Tracer	Large Holder - Truck Rope	244	111	8	1*
402101BG	3/8	50	15	Black / Orange with Tracer	Large Holder - Truck Rope	244	111	6	2
300081	3/8	100	30	Yellow	Hank	244	111	6	1*
300081BG	3/8	100	30	Yellow	Hank	244	111	5	2
300531	3/8	600	183	Yellow	Reel	244	111	1	1
300541	1/2	300	91	Yellow	Reel	420	191	1	1
300551	3/4	150	46	Yellow	Reel	1090	495	1	1

* In Display Box

Polypropylene

Smooth Braid



Part#	Size (in.)	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
300031	1/4	200	60	Yellow / White	Hank	95	43	8	1*
300031BG	1/4	200	60	Yellow / White	Hank	95	43	4	3
302091	3/8	50	15	Red / White	Hank	140	64	8	1*
302091BG	3/8	50	15	Red / White	Hank	140	64	6	4
300501	3/8	600	183	Red / White	Reel	140	64	1	1
300511	5/8	200	60	Blue / White	Reel	290	131	1	1
302101	1/2	35	11	Blue / White	Hank	420	191	8	1*
302101BG	1/2	35	11	Blue / White	Hank	420	191	6	4
302611	5/8	50	15	Royal Blue	Reel	290	131	1	1
302661	5/8	50	15	Blue / White	Hank	290	131	4	3
302671	5/8	50	15	Black	Hank	500	226	4	3
302621	5/8	200	60	Hunter Green	Reel	290	131	1	1
302631	5/8	200	60	Hunter Green / White	Reel	290	131	1	1
302641	5/8	200	60	Red	Reel	290	131	1	1
302651	5/8	200	60	Black	Reel	290	131	1	1

* In Display Box

Hollow Core




Part#	Size (in.)	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
300671	5/32	45	14	Yellow	Hank	26	12	8	5
301751	5/32	45	14	Blue & White	Hank	32	15	8	5
301751BG	5/32	45	14	Blue & White	Hank	32	15	24	6
300291	1/4	50	15	Yellow	Hank	110	50	6	7
448941BG	1/4	50	15	Yellow	Hank Include: 3" Galvanized Security Snap	110	50	12	1
300301	1/4	100	30	Yellow	Hank	110	50	15	1*
300301BG	1/4	100	30	Yellow	Hank	110	50	7	5
400301	1/4	100	30	Yellow	Medium Holder	110	50	14	1*
400301BG	1/4	100	30	Yellow	Medium Holder	110	50	8	2
300321	3/8	50	15	Yellow	Hank	215	98	6	7
300331	3/8	100	30	Yellow	Hank	215	98	15	1*
300331BG	3/8	100	30	Yellow	Hank	215	98	5	3

* In Display Box

Camouflage Ropes - Polypropylene

If it is important that the rope being used blends into the surrounding environment consider using camouflage rope. This 100% polypropylene, diamond braid rope is light weight, floats and is available in three distinct color patterns – Forest (brown tones), Open Field (green tones) and Frozen Tundra (grey tones)


⚠ Warning: Do not use for overhead lifting, support of human weight or athletic equipment, Do not exceed safe working load detailed on the package. Shock loads (stress, jerk) can reduce working loads by as much as 33%. Never stand in line with ropes under tension; rope (especially nylon) may recoil or snap back. Knots reduce rope strength by 40%. Replace the rope if there are signs of wear, such as broken fibers.



Forest



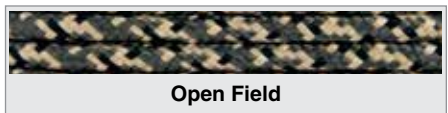Frozen Tundra



Open Field



Camouflage Ropes Usage



Camouflage Rope Packages



Hank



Rope on
Holder



Display
Box

Camouflage Ropes - Polypropylene

Camouflage Rope



Part#	Size (in.)	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
301921	5/32	50	15	Forest	Small Holder	65	30	6	18
301931	5/32	50	15	Frozen Tundra	Small Holder	65	30	6	18
301941	5/32	50	15	Open Field	Small Holder	65	30	6	18
301891	1/4	50	15	Forest	Hank	95	42	8	48
301901	1/4	50	15	Frozen Tundra	Hank	95	42	8	48
301911	1/4	50	15	Open Field	Hank	95	42	8	48
301881	1/4	100	30	Open Field	Hank	95	42	6	18
302301	1/4	100	30	Forest	Medium Holder	95	42	6	18
302321	1/4	100	30	Frozen Tundra	Medium Holder	95	42	6	18
302311	1/4	100	30	Open Field	Medium Holder	95	42	6	18
301861	5/16	75	22	Forest	Hank	110	50	6	18
301871	5/16	75	22	Frozen Tundra	Hank	110	50	6	18
301481	3/8	100	30	Open Field	Hank	244	111	6	1*
301481BG	3/8	100	30	Open Field	Hank	244	111	5	2

* In Display Box

Reflective Ropes - Polypropylene

If it is important that the rope is visible at night consider using reflective rope. This brightly colored rope has a reflective tracer woven into the outer cover of this diamond braided rope so that when light hits the tracer it shines brightly. This 100% polypropylene diamond braid rope is light weight, floats and is available in reflective yellow or orange.

⚠ Warning: Do not use for overhead lifting, support of human weight or athletic equipment, Do not exceed safe working load detailed on the package. Shock loads (stress, jerk) can reduce working loads by as much as 33%. Never stand in line with ropes under tension; rope (especially nylon) may recoil or snap back. Knots reduce rope strength by 40%. Replace the rope if there are signs of wear, such as broken fibers.



Reflective Ropes Usage



Reflective Rope Packages



Hank

Rope on
Holder

Display
Box

Reflective Ropes - Polypropylene

Reflective Rope




Part#	Size (in.)	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
459071	5/32	50	15	Yellow	Small Holder	65	30	6	18
459111	5/32	50	15	Orange	Small Holder	65	30	6	18
459141	5/32	50	15	Yellow and Orange	2 Pack - Small Holders	65	30	6	18
459061	3/16	100	30	Orange	Hank	70	30	6	24
459051	1/4	50	15	Yellow	Hank	95	42	8	48
459121	1/4	100	30	Yellow	Medium Holder	95	42	6	12
459131	1/4	100	30	Orange	Medium Holder	95	42	6	12
459081	3/8	50	15	Orange	Hank	240	110	5	20
459091	3/8	75	22	Yellow	Hank	240	110	5	15

Marine Line

Specifically designed for Marine applications KingCord offers a complete line of anchor lines and dock lines. Nylon offers the highest work load and its shock absorbing abilities make it particularly suitable for these types of applications. All anchor lines come with a spliced in thimble for ease attachment to an anchor rode. All dock lines come with a 10" eye splice for ease of use on a cleat. Nylon double braided line has a diamond braided cover and a diamond braided core for superior strength and performance. Nylon twisted line has all the benefits of nylon but this type of construction is not as strong as a double diamond braid.

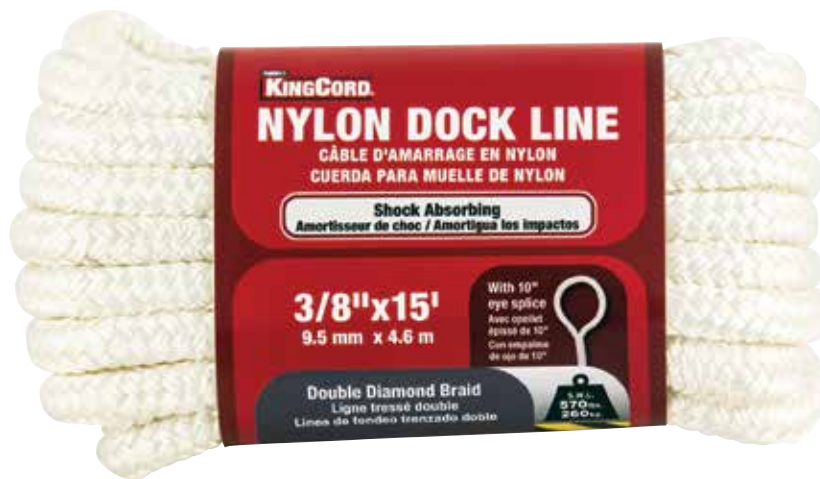⚠ Warning: Do not use for overhead lifting, support of human weight or athletic equipment, Do not exceed safe working load detailed on the package. Shock loads (stress, jerk) can reduce working loads by as much as 33%. Never stand in line with ropes under tension; rope (especially nylon) may recoil or snap back. Knots reduce rope strength by 40%. Replace the rope if there are signs of wear, such as broken fibers.



Marine Line Usage



Marine Line Packages



Hank



Display
Box

Marine Line

Anchor Line - Polypropylene

Double Diamond Braid



Part#	Size (in.)	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
458931	3/8	15	4.5	Black	Hank, Include: 10" Eye Splice	573	259	10	40
458921	3/8	15	4.5	White	Hank, Include: 10" Eye Splice	573	259	10	40

Anchor Line - Nylon

Double Diamond Braid



Part#	Size (in.)	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
459031	3/16	75	22	White	Hank, Include: 3/16" Stainless Steel Thimble			6	36
459001	1/4	100	30	White	Hank, Include: 1/4" Stainless Steel Thimble			6	24
459011	3/8	50	15	Blue	Hank, Include: 3/8" Stainless Steel Thimble	570	260	5	20
459021	3/8	100	30	White	Hank, Include: 3/8" Stainless Steel Thimble	570	260	5	10
458991	1/4	50	15	White	Hank, Include: 1/4" Stainless Steel Thimble			6	36

Twisted Rope



Part#	Size (in.)	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
458941	3/8	50	15	White	Hank, Include: 3/8" Galvanized Thimble	275	125	5	20
458951	3/8	150	45	White	Hank, Include: 3/8" Galvanized Thimble	275	125	4	8
458971	1/2	100	30	White	Coil, Include: 1/2" Galvanized Thimble	780	353	2	4
458981	1/2	200	60	White	Coil, Include: 1/2" Galvanized Thimble	780	353		

Smooth Braid



Part#	Size (in.)	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
459041	3/16	100	30	White	Hank, Include: 3/8" Galvanized Thimble	52	24	6	24

Marine Line

Dock Line - Nylon

Double Diamond Braid



Part#	Size (in.)	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
458901	3/8	15	4.5	Black	Hank, Include: 10" Eye Splice	570	260	10	40
300871	3/8	15	4.5	White	Hank, Include: 10" Eye Splice	570	260	10	40

Twisted Rope



Part#	Size (in.)	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
448931	3/8	15	4.5	Marine Dock Line White	Hank, Include: 10" Eye Splice	275	125	10	40

Nylon

Nylon is the strongest synthetic material for commonly used DIY rope. Nylon is best used for absorbing shock loads, such as towing, because it has some elasticity. Nylon rope absorbs the shock, stretches, and then returns close to its original length once the load has been removed. Nylon is very durable, does not float and will absorb water when wet. When nylon is wet it will shrink slightly and lose 10-15% of its strength. Nylon is ideal for use as a tow rope, anchor line, dock line, safety lines and tie downs.

⚠ Warning: Do not use for overhead lifting, support of human weight or athletic equipment. Do not exceed safe working load detailed on the package. Shock loads (stress, jerk) can reduce working loads by as much as 33%. Never stand in line with ropes under tension; rope (especially nylon) may recoil or snap back. Knots reduce rope strength by 40%. Replace the rope if there are signs of wear, such as broken fibers.



Nylon Ropes Usage



Nylon Rope Packages



Hank



Rope on Holder



Reel



Display Box

Nylon

Diamond Braid



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
300251	1/8	50	15	White	Hank	40	18	8	5
400241	1/8	50	15	White	Small Holder	40	18	20	1*
400241BG	1/8	50	15	White	Small Holder	40	18	4	7
448801	1/8	50	15	Green	Hank	40	18	8	5
448821	1/8	50	15	Orange	Hank	40	18	8	5
448851	1/8	50	15	Gray/Blue/Red	Hank	40	18	8	5
300591	5/32	60	18	White	Hank	45	20	8	5
300261	3/16	50	15	White	Hank	90	41	6	7
300091	3/16	100	30	White	Hank	90	41	18	1*
300091BG	3/16	100	30	White	Hank	90	41	16	2
400091	3/16	100	30	White	Medium Holder	90	41	18	1*
300271	1/4	50	15	White	Hank	124	58	6	7
300271BG	1/4	50	15	White	Hank	124	58	7	8
400271	1/4	50	15	White	Medium Holder	124	58	18	1*
400271BG	1/4	50	15	White	Medium Holder	124	58	8	8
300101	1/4	100	30	White	Hank	124	58	8	1*
300101BG	1/4	100	30	White	Hank	124	58	5	6
300111	3/8	50	15	White	Hank	244	111	6	1*
300111BG	3/8	50	15	White	Hank	244	111	5	5

* In Display Box

Twisted Rope



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
300281	1/4	50	15	White	Hank	124	56	6	7
301651	1/4	50	15	White	Hank	124	56	24	1*
301651BG	1/4	50	15	White	Hank	124	56	8	4
300121	1/4	100	30	White	Hank	124	56	10	1*
300121BG	1/4	100	30	White	Hank	124	56	10	3
300451	1/4	600	183	White	Reel	124	56	1	1
300131	3/8	50	15	White	Hank	278	126	8	1*
300131BG	3/8	50	15	White	Hank	278	126	5	6
448921	3/8	100	30	White	Hank, Includes: Black Plastic Rope Thimble	278	126	12	1
448971	3/8	100	30	White	Hank	278	126	5	2
300461	3/8	600	183	White	Reel	278	126	1	1
300471	1/2	300	91	White	Reel	525	238	1	1
300481	5/8	200	61	White	Reel	935	424	1	1
300491	3/4	150	46	White	Reel	1420	645	1	1

* In Display Box

Nylon

Smooth Braid



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
300401	1/8	600	183	White	Reel	26	12	1	1
448880	5/32	600	183	White	Reel	45	20	1	1
300411	3/16	600	183	White	Reel	52	24	1	1
448890	1/4	200	61	White	Reel	90	41	1	1
300421	1/4	600	183	White	Reel	90	41	1	1
448860	5/16	200	61	White	Reel	135	61	1	1
300431	5/16	600	183	White	Reel	135	61	1	1
302141	3/8	100	30	White	Hank	192	87	6	1*
302141BG	3/8	100	30	White	Hank	192	87	2	6
448870	3/8	100	30	White	Reel	192	87	1	1
300441	3/8	300	91	White	Reel	192	87	1	1

* In Display Box

Hobby Line



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
302701	1.5 lbs (0.25 mm)	328	100	Transparent	Monofilament	1.5	0.7		60
302711	4.4 lbs (0.5 mm)	328	100	Transparent	Monofilament	4.4	2		60
302721	14.6 lbs (1 mm)	328	100	Transparent	Monofilament	14.6	6.6		24



Mason's Line - Nylon

Mason's line is usually strung between two posts and is used to create a straight and level line. It is typically used when laying out posts, patios, footings and when laying a course of bricks. Using mason's line greatly reduces the need to use a level once the mason's line is set properly. The line should be strung tightly between two stakes so it will not sag and needs to be checked periodically to insure the line has not shifted.

⚠ Warning: Do not use for overhead lifting, support of human weight or athletic equipment, Do not exceed safe working load detailed on the package. Shock loads (stress, jerk) can reduce working loads by as much as 33%. Never stand in line with ropes under tension; rope (especially nylon) may recoil or snap back. Knots reduce rope strength by 40%. Replace the rope if there are signs of wear, such as broken fibers.



Mason's Line Usage



Mason's Line Packages



Spool



Spool with
Twine Cutter



Re-loadable
Reel



Display
Box

Mason's Line - Nylon

Twisted Mason Line



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg.		
308551	#18	215	65	Neon Yellow	6" Spool	11	5	48	1*
308591	#18	215	65	Orange	6" Spool	11	5	48	1*
308611	#18	215	65	Pink	6" Spool	11	5	48	1*
302121	#18	225	68	White	6" Spool	11	5	28	1*
302121BG	#18	225	68	White	6" Spool	11	5	22	5
300211	#18	225	68	Neon Yellow	6" Spool	11	5	28	1*
300211BG	#18	225	68	Neon Yellow	6" Spool	11	5	22	5
310331	#18	225	68	Neon Yellow	6" Spool, Includes: Re-loadable Reel	11	5	8	1*
310331BG	#18	225	69	Neon Yellow	6" Spool, Includes: Re-loadable Reel	11	5	22	5
302131	#18	225	69	Assorted	6" Spool	11	5	28	1*
302131BG	#18	225	69	Assorted	6" Spool	11	5	22	5
402171	#18	300	91	White	6" Spool, Includes: Twine Cutter	11	5	28	1*
402171BG	#18	300	91	White	6" Spool, Includes: Twine Cutter	11	5	22	5
402191	#18	300	91	Assorted	6" Spool, Includes: Twine Cutter	11	5	28	1*
402191BG	#18	300	91	Assorted	6" Spool, Includes: Twine Cutter	11	5	22	5
310251	#18	300	91	Neon Yellow	6" Spool, Includes: Twine Cutter	11	5	28	1*
310251BG	#18	300	91	Neon Yellow	6" Spool, Include: Twine Cutter	11	5	22	5
300861	#18	350	107	Pink	3" Spool	11	5	42	1*
300861BG	#18	350	107	Pink	3" Spool	11	5	14	6
301501	#18	500	152	White	6" Spool	11	5	15	1*
301501BG	#18	500	152	White	6" Spool	11	5	18	4
310291	#18	600	183	White	6" Spool, Include: Twine Cutter	11	5	15	1*
310291BG	#18	600	183	White	6" Spool, Include: Twine Cutter	11	5	16	4
310361	#18	600	183	White	6" Spool, Include: Re-loadable Reel	11	5	8	1*
310361BG	#18	600	183	White	6" Spool, Include: Re-loadable Reel	11	5	8	6
300831	#18	1050	320	White	6" Spool	11	5	21	1*
300831BG	#18	1050	320	White	6" Spool	11	5	7	6
300851	#18	1050	320	Pink	6" Spool	11	5	21	1*
300851BG	#18	1050	320	Pink	6" Spool	11	5	7	6

* In Display Box

Paracord 550 - Nylon

Paracord 550 is a thin (5/32" diameter) 100% nylon cord that has a nylon diamond braid cover and 7-strand nylon core, giving it exceptional strength for its size. It is specifically designed for rugged utility applications requiring strength, durability, and compactness. This soft, pliable cord is strong (minimum 550 lbs breaking strength) and will stretch up to 30% of its original length before breaking.

KingCord® Paracord is true Paracord 550, meaning that it meets or exceeds the requirements of the MIL-C-5040-H, Type III standard from the US military.

Paracord is a strong a versatile utility cord that has a wide range of uses. Everything from boot laces and snares to home & auto emergency kits, camping, hunting, survival kits, disaster prep, and crafting projects, including lanyards, bracelets, dog collars and belts.

⚠ Warning: Do not use for overhead lifting, support of human weight or athletic equipment, Do not exceed safe working load detailed on the package. Shock loads (stress, jerk) can reduce working loads by as much as 33%. Never stand in line with ropes under tension; rope (especially nylon) may recoil or snap back. Knots reduce rope strength by 40%. Replace the rope if there are signs of wear, such as broken fibers.



Paracord 550 Usage



Paracord 550 Packages



Hank



Hang Card



Display Box

Paracord 550 - Nylon

Diamond Braid



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
448641	5/32	50	15	Green	Hank	110	50	6	72
448671	5/32	50	15	Red	Hank	110	50	6	72
448681	5/32	50	15	White	Hank	110	50	6	72
448691	5/32	50	15	Yellow and Orange	Hank	110	50	6	72
448701	5/32	50	15	Camouflage - Green, Black, Brown	Hank	110	50	6	72
448711	5/32	50	15	Blue	Hank	110	50	6	72
448721	5/32	50	15	Pink	Hank	110	50	6	72
448791	5/32	50	15	Black	Hank	110	50	6	72



– (Paracord 550 Bracelet)



Part#	Color	General Description	Breaking Strength	Shelf Pack	Total Shelf Packs in Master Pack
448741	Orange	Hang Card	550 lbs	8	160
448751	Camouflage Field	Hang Card	550 lbs	8	160
448761	Pink	Hang Card	550 lbs	8	160
448771	Rainbow	Hang Card	550 lbs	8	160
448781	Camouflage Dessert	Hang Card	550 lbs	8	160
448981	Yellow and Orange	Hang Card	550 lbs	8	160
448991	Blue	Hang Card	550 lbs	8	160
449001	Red	Hang Card	550 lbs	8	160
449011	Black	Hang Card	550 lbs	8	160
449041	Camouflage Field and Dessert / Black and Orange	2 per Hang Card	550 lbs	6	72
449021		5 per Tent Card	550 lbs	8	160

Polyester

Polyester is different from the other synthetic rope due to its low stretch characteristics, excellent abrasion resistance, and only slightly lower strength-to-weight ratio when compared to nylon. Due to its low stretch characteristics, polyester cannot absorb shock loads very efficiently. It will not absorb water which creates a lightweight material when used outdoors around water applications or during rain. It also has excellent ultraviolet (UV) light resistance, so it is popular for extended outdoor uses, like clotheslines, flagpole rope and boating.

⚠ Warning: Do not use for overhead lifting, support of human weight or athletic equipment, Do not exceed safe working load detailed on the package. Shock loads (stress, jerk) can reduce working loads by as much as 33%. Never stand in line with ropes under tension; rope (especially nylon) may recoil or snap back. Knots reduce rope strength by 40%. Replace the rope if there are signs of wear, such as broken fibers.



Polyester Ropes Usage



Polyester Rope Packages



Hank

Rope
Holder

Display
Box

Polyester

Diamond Braid



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
302051	5/64" – Awning	45	14	Natural	Hank	30	13	28	1*
302051BG	5/64" – Awning	45	14	Natural	Hank	30	13	36	8
308251	1/8"	48	14.6	White	Hank	50	23	60	1*
308251BG	1/8"	48	14.6	White	Hank	50	23	21	8
300361	3/16"	50	15	White / Medium gray	Hank	70	31	6	7
400061	3/16"	50	15	White / Medium gray	Small Holder	70	31	12	1*
400061BG	3/16"	50	15	White / Medium gray	Small Holder	70	31	5	6
303031	3/16"	100	30	White / Medium gray	Hank	70	31	36	1*
303031BG	3/16"	100	30	White / Medium gray	Hank	70	31	10	4
303271	1/4"	50	15	White / Medium gray	Hank	120	54	24	1*
303271BG	1/4"	50	15	White / Medium gray	Hank	120	54	8	8
300351	5/16"	50	15	White / Medium gray	Hank	230	104	12	1*
300351BG	5/16"	50	15	White / Medium gray	Hank	230	104	10	3

* In Display Box

Twisted Rope



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
308121	1/4"	100	30	White	Hank	120	54	12	1*
308121BG	1/4"	100	30	White	Hank	120	54	12	3
303131	3/8"	50	15	White	Hank	280	126	12	1*
303131BG	3/8"	50	15	White	Hank	280	126	8	3
448951	3/8"	100	30	White	Hank	280	126	10	1*
448951BG	3/8"	100	30	White	Hank	280	126	5	2
308401	1/2"	50	15	White	Hank	550	249	6	1*
308401BG	1/2"	50	15	White	Hank	550	249	4	4

* In Display Box

Polyester

Smooth Braid



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
303221	3/16"	50	15	White	Hank	22	10	32	1*
303221BG	3/16"	50	15	White	Hank	22	10	12	6
308511	1/4"	50	15	White	Hank	120	54	40	1*
308511BG	1/4"	50	15	White	Hank	120	54	15	6
308531	7/16"	100	30	White	Hank	350	159	8	1*
308531BG	7/16"	100	30	White	Hank	350	159	4	2

* In Display Box

Clothesline

A clothesline has very specific requirements. It must have low stretch – so it will not sag under the weight of a load of wet clothes. It must be durable and maintain a round shape – to run constantly and smoothly over pulleys. It must have UV resistance – to withstand degradation by constant exposure to sunlight. Due to its low stretch, abrasion resistance and UV resistance polyester is the perfect material for this application.

⚠ Warning: Do not use for overhead lifting, support of human weight or athletic equipment, Do not exceed safe working load detailed on the package. Shock loads (stress, jerk) can reduce working loads by as much as 33%. Never stand in line with ropes under tension; rope (especially nylon) may recoil or snap back. Knots reduce rope strength by 40%. Replace the rope if there are signs of wear, such as broken fibers.



Clothesline Usage



Clothesline Packages



Hank

Rope on
Holder

Coil

Display
Box

Clothesline

Diamond Braid



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
300221	3/16"	50	15	White	Hank	16	7	8	5
308461	3/16"	50	15	White	Hank	16	7	24	1*
308461BG	3/16"	50	15	White	Hank	16	7	12	4
300001	3/16"	100	30	White	Hank	16	7	18	1*
300001BG	3/16"	100	30	White	Hank	16	7	12	2
400041	3/16"	100	30	White	Medium Holder	16	7	14	1*
400041BG	3/16"	100	30	White	Medium Holder	16	7	9	2

* In Display Box

Clothesline - PVC Coated Wire



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
302151	#4 1/8"	100	30	Blue	Coil Vinyl wire	165	75	8	1*
302151BG	#4 1/8"	100	30	Blue	Coil Vinyl wire	165	75	8	2
308491	#5 5/32"	50	15	Green	Hank Vinyl wire	340	154	32	1*
308491BG	#5 5/32"	50	15	Green	Hank Vinyl wire	340	154	12	6
308681	#6 3/16"	100	30	White	Hank Plastic wire	22	10	32	1*
308681BG	#6 3/16"	100	30	White	Hank Plastic wire	22	10	6	6

* In Display Box

Cotton

Cotton is a widely used natural fiber rope that is often used in the forms of small twines and cords. It is soft, pliable and easy on the hands. Due in part to its medium strength characteristics, Cotton is an excellent choice for a wide variety of common household uses, including the kitchen, garden, for blinds, crafts or for package bundling.

⚠ Warning: Do not use for overhead lifting, support of human weight or athletic equipment, Do not exceed safe working load detailed on the package. Shock loads (stress, jerk) can reduce working loads by as much as 33%. Never stand in line with ropes under tension; rope (especially nylon) may recoil or snap back. Knots reduce rope strength by 40%. Replace the rope if there are signs of wear, such as broken fibers.



Cotton Rope Usage



Cotton Ropes Packages



Hank



Spool



Spool with
Twine Cutter



Display
Box

Cotton

Cord Venetian Blind



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
300891	#4 9/64	30	9	Natural	Hank	30	14	84	1*
300891BG	#4 9/64	30	9	Natural	Hank	30	14	28	6

* In Display Box

Diamond Braid



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
308701	1/8"	45	14	Natural	Hank	28	12	60	1*
308701BG	1/8"	45	14	Natural	Hank	28	12	24	6

* In Display Box

Smooth Braid



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
300241	1/8"	100	30	Natural	Hank	9	4	24	1*
300241BG	1/8"	100	30	Natural	Hank	9	4	16	4
308381	# 21	285	87	Natural	Hank	11	5	36	1*
308381BG	# 21	285	87	Natural	Hank	11	5	18	4
308631	#7 7/32"	100	30	Natural	Hank	21	9	12	1*
308631BG	#7 7/32"	100	30	Natural	Hank	21	9	12	3
308661	#8 1/4"	100	30	Natural	Hank	28	12	18	1*
308661BG	#8 1/4"	100	30	Natural	Hank	28	12	12	2

* In Display Box

Cotton

Twisted Rope



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
302041	# 21	140	43	Natural	3" Spool	-	-	28	1*
302041BG	# 21	140	43	Natural	3" Spool	-	-	24	6
302061	Butcher's Cord	250	76	Natural	3" Spool	-	-	28	1*
302061BG	Butcher's Cord	250	76	Natural	3" Spool	-	-	20	5
300181	Medium	420	128	Natural	6" Spool	11	5	24	1*
300181BG	Medium	420	128	Natural	6" Spool	11	5	18	4
400551	Medium	500	152	Natural	6" Spool Twine Cutter	11	5	18	1
400551BG	Medium	500	152	Natural	6" Spool Twine Cutter	11	5	16	4
400591	Medium	500	152	Natural	6" Spool Twine Cutter	11	5	4	1

* In Display Box

Manila

Manila, commonly known as Manila Hemp, is a hard natural fiber obtained from the leaf stalks of a member of the banana plant family. It is the strongest of the natural fiber ropes, but it has a limited shelf life when not stored properly and is easily damaged by moisture, ultraviolet (UV) light, and many common chemicals. Manila is an excellent option for heavier duty use in the garden, crafts decorative purposes, landscaping or for package and bundling.

⚠ Warning: Do not use for overhead lifting, support of human weight or athletic equipment. Do not exceed safe working load detailed on the package. Shock loads (stress, jerk) can reduce working loads by as much as 33%. Never stand in line with ropes under tension; rope (especially nylon) may recoil or snap back. Knots reduce rope strength by 40%. Replace the rope if there are signs of wear, such as broken fibers.



Cotton Rope Usage



Cotton Ropes Packages



Coil



Reel



Display
Box

Manila

Twisted Rope



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
300201	1/4"	50	15	Natural	Coil	54	25	8	1*
300201BG	1/4"	50	15	Natural	Coil	54	25	7	8
301701	1/4"	1200	366	Natural	Reel	54	25	1	1
308421	3/8"	50	15	Natural	Coil	122	55	12	1*
308421BG	3/8"	50	15	Natural	Coil	122	55	8	3
300371	3/8"	600	183	Natural	Reel	122	55	1	1
300381	1/2"	300	91	Natural	Reel	264	120	1	1
300391	3/4"	150	46	Natural	Reel	695	316	1	1

* In Display Box

Sisal

Sisal is a hard natural fiber similar to Manila. Sisal has a lower strength-to-weight ratio when compared to Manila. Sisal can be easily damaged by moisture, ultraviolet (UV) light, and many common chemicals. It is resistant to salt water and is often found in the forms of small twines and cords. Sisal is an excellent option for medium duty use on indoor plants, in the garden, for crafts and for package bundling.

⚠ Warning: Do not use for overhead lifting, support of human weight or athletic equipment. Do not exceed safe working load detailed on the package. Shock loads (stress, jerk) can reduce working loads by as much as 33%. Never stand in line with ropes under tension; rope (especially nylon) may recoil or snap back. Knots reduce rope strength by 40%. Replace the rope if there are signs of wear, such as broken fibers.



Cotton Rope Usage



Cotton Ropes Packages



Spool

Coil

Display
Box

Twisted Rope



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
302471	1/4"	50	15	Natural	Coil	48	22	12	1*
302471BG	1/4"	50	15	Natural	Coil	48	22	7	8
300161	1/4"	100	30	Natural	Coil	48	22	8	1*
300161BG	1/4"	100	30	Natural	Coil	48	22	3	6
300171	3/8"	50	15	Natural	Coil	100	40	8	1*
300171BG	3/8"	50	15	Natural	Coil	100	40	4	4
302481	3/8"	100	30	Natural	Coil	100	40	2	4
302491	1/2"	50	15	Natural	Coil	265	120	2	12
300141	Medium	300	91	Natural	Spool	8	3	10	1*
300141BG	Medium	300	91	Natural	Spool	8	3	14	3
300601	Medium	2250	686	Natural	Spool	8	3	1	2
300601BG	Medium	2250	686	Natural	Spool	8	3	3	3

* In Display Box

Jute

Jute is a soft, lightweight, low-strength natural fiber that is usually made into yarns, twines and small cords. Jute can be easily damaged by moisture, ultraviolet (UV) light, and many common chemicals. Jute is an excellent option for lightweight use on indoor plants, in the garden, for crafts and for package bundling.

⚠ Warning: Do not use for overhead lifting, support of human weight or athletic equipment, Do not exceed safe working load detailed on the package. Shock loads (stress, jerk) can reduce working loads by as much as 33%. Never stand in line with ropes under tension; rope (especially nylon) may recoil or snap back. Knots reduce rope strength by 40%. Replace the rope if there are signs of wear, such as broken fibers.



Cotton Rope Usage



Cotton Ropes Packages



Spool



Spool with
Twine Cutter



Display
Box

Twine Rope



Part#	Size	Length		Color	General Description	Safety Work Load		Shelf Pack	Total Shelf Packs in Master Pack
		ft.	m.			lbs.	kg		
300191	Fine	190	58	Natural	3" Spool	4	2	22	1*
300191BG	Fine	190	58	Natural	3" Spool	4	2	14	6
401631	Fine	250	76	Natural	6" Spool Twine Cutter	4	2	18	1*
401631BG	Fine	250	76	Natural	6" Spool Twine Cutter	4	2	22	5
401651	Fine	250	76	Natural	6" Spool Twine Cutter	4	2	4	10
301511	Fine	190	58	Green	3" Spool	4	2	22	1*
301511BG	Fine	190	58	Green	3" Spool	4	2	14	6
401671	Fine	250	76	Green	6" Spool Twine Cutter	4	2	18	1*
401671BG	Fine	250	76	Green	6" Spool Twine Cutter	4	2	22	4
401661	Fine	250	76	Natural	6" Spool Twine Cutter	4	2	4	10
302071	Heavy Duty	190	58	Natural	3" Spool	10	4	22	1*
302071BG	Heavy Duty	190	58	Natural	3" Spool	10	4	16	7
310131	Heavy Duty	250	76	Natural	6" Spool	10	4	4	10
300801BG	2Ply	5 lb reel		Natural	6" Spool	7	3	1	1

* In Display Box

Index

Part #	Page	UPC
300001	34	066366300000
300001BG	34	066366300000
300011	13	066366300017
300011BG	13	066366300017
300021	13	066366300024
300021BG	13	066366300024
300031	15	066366300031
300031BG	15	066366300031
300041	13	066366300048
300041BG	13	066366300048
300051	14	066366300055
300051BG	14	066366300055
300061	14	066366300062
300061BG	14	066366300062
300081	14	066366300086
300081BG	14	066366300086
300091	24	066366300093
300091BG	24	066366300093
300101	24	066366300109
300101BG	24	066366300109
300111	24	066366300116
300111BG	24	066366300116
300121	24	066366300123
300121BG	24	066366300123
300131	24	066366300130
300131BG	24	066366300130
300141	41	066366300147
300141BG	41	066366300147
300161	41	066366300161
300161BG	41	066366300161
300171	41	066366300178
300171BG	41	066366300178
300181	37	066366300185
300181BG	37	066366300185
300191	43	066366300192
300191BG	43	066366300192
300201	39	066366300208
300201BG	39	066366300208
300211	27	066366300215
300211BG	27	066366300215
300221	34	066366300222
300241	36	066366300246
300241BG	36	066366300246
300251	24	066366300253
300261	24	066366300260
300271	24	066366300277
300271BG	24	066366300277
300281	24	066366300284
300291	15	066366300291
300301	15	066366300307
300301BG	15	066366300307
300321	15	066366300321
300331	15	066366300338
300331BG	15	066366300338

Part #	Page	UPC
300341	14	066366300345
300341BG	14	066366300345
300351	31	066366300352
300351BG	31	066366300352
300361	31	066366300369
300371	39	066366300376
300381	39	066366300383
300391	39	066366300390
300401	25	066366300406
300411	25	066366300413
300421	25	066366300420
300431	25	066366300437
300441	25	066366300444
300451	24	066366300451
300461	24	066366300468
300471	24	066366300475
300481	24	066366300482
300491	24	066366300499
300501	15	066366300505
300511	15	066366300512
300521	14	066366300529
300531	14	066366300536
300541	14	066366300543
300551	14	066366300550
300591	24	066366300598
300601	41	066366300604
300601BG	41	066366300604
300671	15	066366300673
300801BG	43	066366300802
300831	27	066366300833
300831BG	27	066366300833
300841BG	13	066366300840
300851	27	066366300857
300851BG	27	066366300857
300861	27	066366300864
300861BG	27	066366300864
300871	22	066366300871
300891	36	066366300895
300891BG	36	066366300895
301481	17	066366301489
301481BG	17	066366301489
301491	13	066366301496
301491BG	13	066366301496
301501	27	066366301502
301501BG	27	066366301502
301511	43	066366301519
301511BG	43	066366301519
301651	24	066366301656
301651BG	24	066366301656
301671	14	066366301670
301701	39	066366301700
301741	14	066366301748
301741BG	14	066366301748
301751	15	066366301755

Part #	Page	UPC
301751BG	15	066366301755
301761	13	066366301762
301761BG	13	066366301762
301771	14	066366301779
301771BG	14	066366301779
301781	14	066366301786
301781BG	14	066366301786
301791	13	066366301793
301791BG	13	066366301793
301811	14	066366301816
301811BG	14	066366301816
301821	14	066366301823
301821BG	14	066366301823
301861	17	066366301861
301871	17	066366301878
301881	17	066366301885
301891	17	066366301892
301901	17	066366301908
301911	17	066366301915
301921	17	066366301922
301931	17	066366301939
301941	17	066366301946
302041	37	066366302042
302041BG	37	066366302042
302051	31	066366302059
302051BG	31	066366302059
302061	37	066366302066
302061BG	37	066366302066
302071	43	066366302073
302071BG	43	066366302073
302091	15	066366302097
302091BG	15	066366302097
302101	15	066366302103
302101BG	15	066366302103
302111	14	066366302110
302111BG	14	066366302110
302121	27	066366302127
302121BG	27	066366302127
302131	27	066366302134
302131BG	27	066366302134
302141	25	066366302141
302141BG	25	066366302141
302151	34	066366302158
302151BG	34	066366302158
302301	17	066366302301
302311	17	066366302318
302321	17	066366302325
302431	13	066366302431
302461	13	066366302462
302471	41	066366302479
302471BG	41	066366302479
302481	41	066366302486
302491	41	066366302493
302611	15	066366302615

Index

Part #	Page	UPC	Part #	Page	UPC	Part #	Page	UPC
302621	15	066366302622	310361BG	27	066366310368	448921	24	066366448924
302631	15	066366302639	312130	10	066366312133	448931	22	066366448931
302641	15	066366302646	312140	10	066366312140	448941BG	15	066366448948
302651	15	066366302653	312150	10	066366312157	448951	31	066366448955
302661	15	066366302660	400031	13	066366400038	448951BG	31	066366448955
302671	15	066366302677	400031BG	13	066366400038	448971	24	066366448979
302701	25	066366302707	400041	34	066366400045	448981	29	066366448986
302711	25	066366302714	400041BG	34	066366400045	448991	29	066366448993
302721	25	066366302721	400061	31	066366400069	449001	29	066366449006
303031	31	066366303032	400061BG	31	066366400069	449011	29	066366449013
303031BG	31	066366303032	400091	24	066366400090	449021	29	066366449020
303131	31	066366303131	400241	24	066366400243	449041	29	066366449044
303131BG	31	066366303131	400241BG	24	066366400243	458901	22	066366458909
303221	32	066366303223	400271	24	066366400274	458921	21	066366458923
303221BG	32	066366303223	400271BG	24	066366400274	458931	21	066366458930
303271	31	066366303278	400301	15	066366400304	458941	21	066366458947
303271BG	31	066366303278	400301BG	15	066366400304	458951	21	066366458954
308121	31	066366308129	400551	37	066366400557	458971	21	066366458978
308121BG	31	066366308129	400551BG	37	066366400557	458981	21	066366458985
308251	31	066366308259	400591	37	066366400595	458991	21	066366458992
308251BG	31	066366308259	401631	43	066366401639	459001	21	066366459005
308381	36	066366308389	401631BG	43	066366401639	459011	21	066366459012
308381BG	36	066366308389	401651	43	066366401653	459021	21	066366459029
308401	31	066366308402	401661	43	066366401660	459031	21	066366459036
308401BG	31	066366308402	401671	43	066366401677	459041	21	066366459043
308421	39	066366308426	401671BG	43	066366401677	459051	19	066366459050
308421BG	39	066366308426	402101	14	066366402100	459061	19	066366459067
308461	34	066366308464	402101BG	14	066366402100	459071	19	066366459074
308461BG	34	066366308464	402171	27	066366402179	459081	19	066366459081
308491	34	066366308495	402171BG	27	066366402179	459091	19	066366459098
308491BG	34	066366308495	402191	27	066366402193	459111	19	066366459111
308511	32	066366308518	402191BG	27	066366402193	459121	19	066366459128
308511BG	32	066366308518	448641	29	066366448641	459131	19	066366459135
308531	32	066366308532	448671	29	066366448672	459141	19	066366459142
308531BG	32	066366308532	448681	29	066366448689	507831	10	066366507836
308551	27	066366308556	448691	29	066366448696	507841	10	066366507843
308591	27	066366308594	448701	29	066366448702	507851	10	066366507850
308611	27	066366308617	448711	29	066366448719	517021	10	066366517026
308631	36	066366308631	448721	29	066366448726	517022	10	066366517026
308631BG	36	066366308631	448741	29	066366448740	599940	10	066366599947
308661	36	066366308662	448751	29	066366448757	997120	11	066366997125
308661BG	36	066366308662	448761	29	066366448764	997860	11	066366997866
308681	34	066366308686	448771	29	066366448771	997880	11	066366997880
308681BG	34	066366308686	448781	29	066366448788	DIV1000	11	
308701	36	066366308709	448791	29	066366448795	DIV1100	11	
308701BG	36	066366308709	448801	24	066366448801	DIV1600*	11	
310131	43	066366310139	448821	24	066366448825	DIV1800*	11	
310251	27	066366310252	448831BG	13	066366448832	DIV1900*	11	
310251BG	27	066366310252	448840BG	13	066366448849	NL1020	11	
310291	27	066366310290	448851	24	066366448856	RA300000	10	
310291BG	27	066366310290	448860	25	066366448863	RA400000	10	
310331	27	066366310337	448870	25	066366448870			
310331BG	27	066366310337	448880	25	066366448887			
310361	27	066366310368	448890	25	066366448894			

Best Value Commitments

At MIBRO, we believe that we give our customers the **BEST VALUE** in the marketplace through a commitment to upholding the following seven standards:

Quality

Product that meets or exceeds the expectations of consumers

Appearance

Excellent product appearance reflecting the inherent quality of the product

Packaging and Merchandising

Always customer focused and consumer friendly

Service

Customer driven with on-time delivery and high fill rates as the benchmarks

Flexibility

Listening to our customers and responding to their unique needs

Pricing

Pricing that allows our customers to be more competitive

Innovation

Constantly challenging, evolving, modifying and breaking new ground

Terms & Conditions

Product Guarantee

MIBRO products are manufactured to precise specifications and rigid quality control standards. Goods are inspected before shipment and are believed to be free from defects in workmanship and materials. We guarantee every product against defects in workmanship or materials and will replace or repair such products without charge. However, we cannot be responsible for products that show excessive wear, misuse or abuse.

Payment Terms

Net 30 days. Special terms printed on customer's purchase orders will not be acknowledged where they differ from our terms. Prices billed will be those in effect at time of shipment. New orders will not be processed or shipped to accounts with significantly past due balances.

Minimum Order

For orders that do not include Chain products, minimum order value is \$500.00 net.

For orders that include Chain products, minimum order value is \$750.00 net.

Prepaid Freight

Freight is F.O.B. our warehouse. When minimum order value is met, freight is prepaid via carrier of our choice. (Outside mainland Canada and US, including Alaska, Hawaii and Puerto Rico, minimum orders must be valued at \$1,500.00 net or more to qualify for prepaid freight).

Shortage or Damage Claims

In the event of any shortage or damage, it is the customer's obligation to notify the delivery carrier within 10 days. We will assist you with your claim. Title to products sold shall pass upon delivery to carrier at point of shipment.

Returns of Merchandise

We require a return goods authorization (RGA) number for all product returns. Any returns not previously authorized in writing will be refused at our warehouse and returned at the sender's expense. All authorized returns to MIBRO must be shipped prepaid. We do not allow credit for used, obsolete, or shelf-worn merchandise damaged beyond our control. Credit for authorized returns will be issued at prices in effect at the time of purchase, less 15% handling charge and a reasonable charge to recondition and repack the merchandise if necessary.

Standard Packing

Orders will be shipped in standard shelf pack units.

Illustrations

Illustrations are used to show product types and are not necessarily exact.

Notice

The product specifications and dimensions are as accurate as possible at the time of printing. However, because we are constantly improving the quality and design of our products, they can change without notice.

Pricing

Product pricing will be supplied by our sales representatives and verified by our customer care and sales support teams. Prices subject to change without advance notice, due to market place conditions related to fluctuations of currencies and/or raw material prices.

