ELEGANCE®
Hotel
Lock

Lock for hotels with operation through cards, software and card programmer.

FEATURES

- Stand alone electronic lock with RFID technology
- Fire Listed for usage on fire doors (EN)
- High security stainless steel mortise lockcase available in ANSI, AUS and EURO versions
- CE, ANSI/BHMA, UL approved
- Die-Casting handle with long lasting painting finish
- 3-point stainless steel latch construction with antifriction mechanism
- Mortise equipped 20mm throw high strength deadbolt
- Panic release function – the deadbolt and latch are automatically retracted by inside handle for easy regress in emergency situation
- ADA compliant (guest with physical disabilities)
- Future proof re-programmable FLASH RAM lock memory
- Powered by 4AA batteries that provide up to 1 year normal life time
- 414 event audit trail
- Compatible with BISHOTEL software platform
- High security mechanical override cylinder available
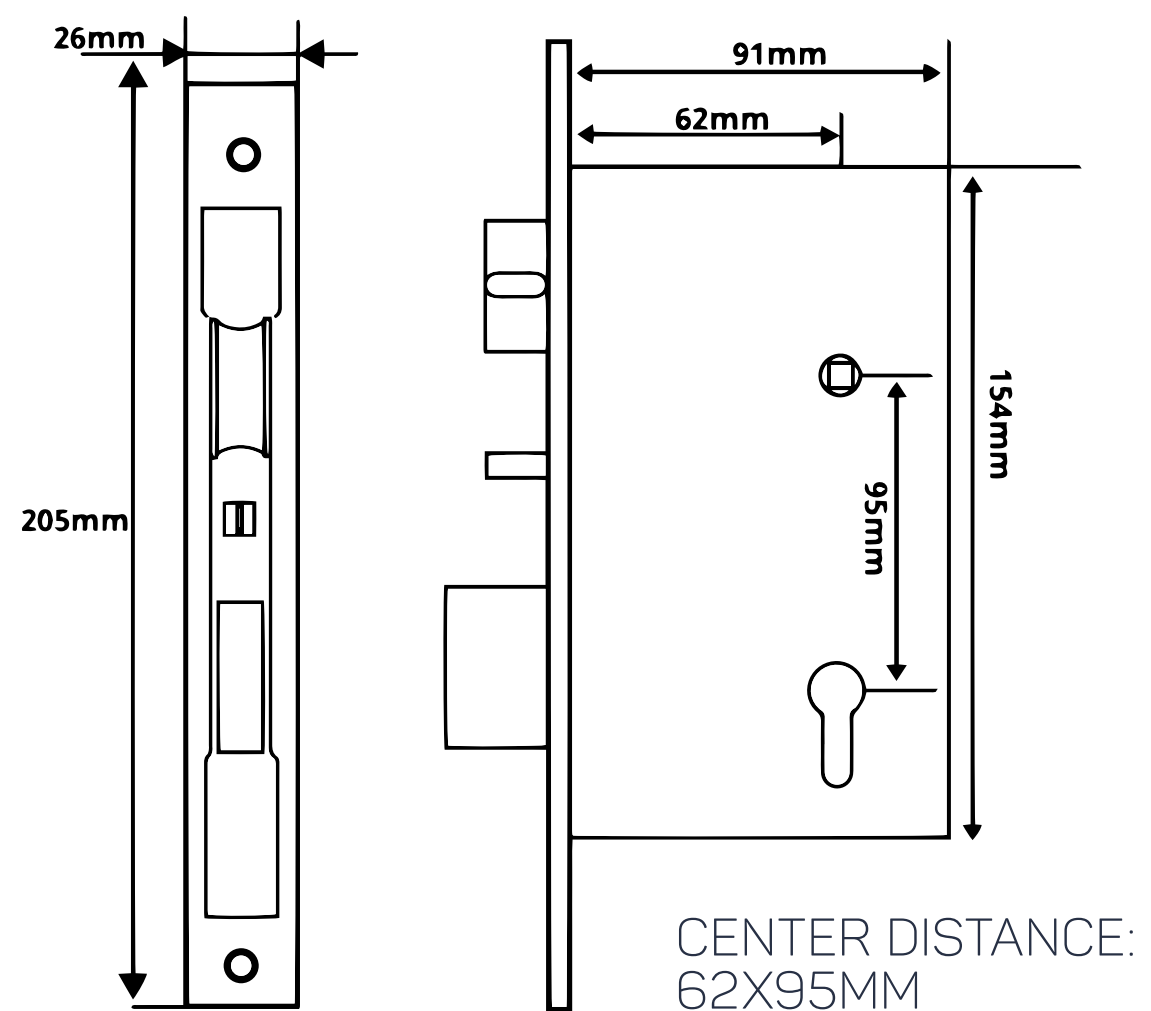- Optional to configure stainless steel handle of No.36, No.56 or No.07

TECHNICAL DATA

Panel:	Aluminum alloy
Mortise:	ANSI MORTISE
PCBA:	With conformal coating
Suitable Doors:	Wooden doors
Power Supply:	DC 6V(4 pieces AA batteries)
Battery life time:	14 months
Working Temperature:	-25 ~ +70 °C
Working Humidity:	15 ~ 95% RH
Memory:	3084 pieces opening record
Card type:	S50 mifare card
Weight:	2.8KGS

BOLT

LOCK MEASURES

(HD U.S.A STANDARD CYLINDER)

26mm
205mm
91mm
62mm
154mm
95mm

CENTER DISTANCE: 62X95MM

INTERFACE SOFTWARE

micros FIDELIO
Opera