

PAPAS

WASTE EQUIPMENT INTERNATIONAL

Australian leaders in quality waste management solutions since 1980.

'COMMUTER'-series

Mini Rear-Loading Compaction Units
Available in capacities from 4.5m³ to 8m³



Standard Features:


- Radius design for superior strength
- 5mm Bisalloy 400 wear plate floor in hopper
- 5mm high-tensile steel floor in body
- 3mm high-tensile steel sides & roof in body
- Fully welded externally for maximum strength & corrosion resistance
- Low loading height for ease of operation
- Automatic lock/unlock system for rear door
- Heavy duty proprietary rear door seal
- Premium hydraulic filtration system
- Abrasive-blasted, undercoated & top-coated in two-pack paint (single colour)
- PLC Control system
- Telescopic ejection system inc. adjustable load density control
- Extreme-duty ejector blade guides inc. anti-twist feature to accommodate eccentric payloads in body

Optional Features:

- Supply & fitment of heavy-duty PTO
- Camera systems (inc. multi-viewpoint)
- Bin-lift systems (120/140/240/660/1000 litre)
- Hopper surround panels
- Spare wheel carrier
- Hopper & rear flood-lighting
- Piston-pump hydraulic system
- Automatic greasing system
- Toolboxes (various sizes available)
- Strobe beacons inc. protective guard
- Bin deodoriser system
- Tuckaway bin-lift system (120-1000 litre/1000kg capacity)
- Water wash-down system
- Fire extinguishers (or automatic fire suppression system)
- Weighing systems inc. digital display & printer



Dim.	Description	4.5m ³	6m ³	7m ³	8m ³
A	Body floor length	2330mm	3170mm	3590mm	3590mm
B	Overall length (not inc. steps or bin lifter)	3265mm	4105mm	4525mm	4525mm
C	Height above chassis—tailgate closed (subject to wheel clearance)	1630mm	1630mm	1630mm	1830mm
D	Height above chassis—tailgate open (subject to wheel clearance)	2780mm	2780mm	2780mm	2980mm
	Overall width	2010mm	2010mm	2010mm	2010mm
	Approximate tare mass (bare unit exc. vehicle)	2300kg	2400kg	2500kg	2700kg
	Hopper capacity (excl. bin lifter extension)	0.6m ³	0.6m ³	0.6m ³	0.6m ³
	Width of hopper opening	1500mm	1500mm	1500mm	1500mm
	Hopper loading height (from top of chassis—subject to wheel clearance)	+50mm	+50mm	+50mm	+50mm
	Cab-chassis minimum GVM	6-7T	7-9T	8.5-10.4T	9-10.4T
	Approximate wheelbase (guide only)	3350mm	3350mm	4200mm	4200mm

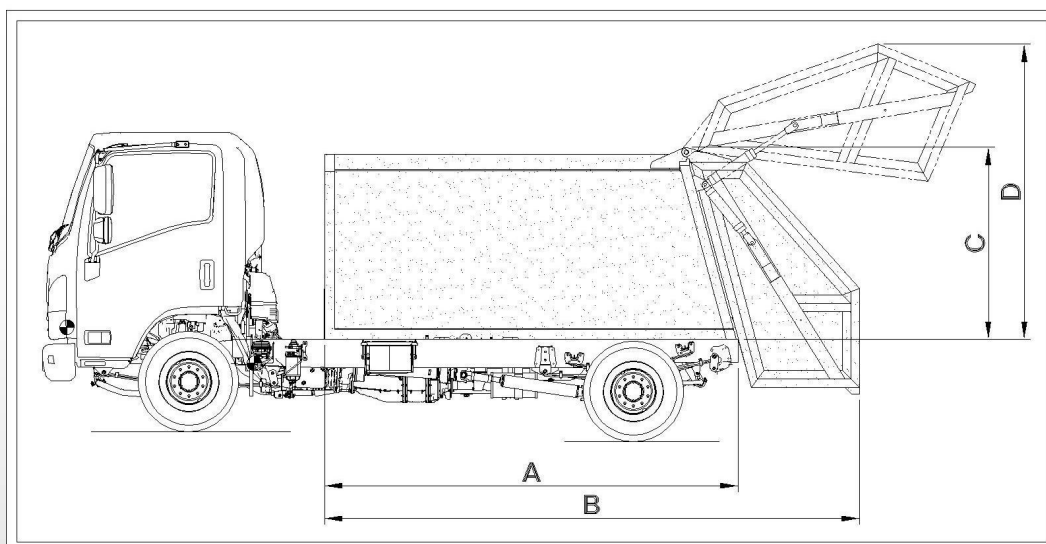

Papas Waste Equipment International Pty Ltd

Location: 6 Duncan Road, Dry Creek, South Australia 5094

Postal Address: PO Box 226, Dry Creek, South Australia 5094

Phone: +61 8 8162 9241 Fax: +61 8 8162 9291

Web: www.papas.com.au Email: info@papas.com.au

Papas Waste Equipment International Pty Ltd reserve the right to alter these specifications without prior notice.