



**(865) 224-3922**



**Your Connection to Waterfront Fun**

Floating Docks  
PWC Docking  
Kayak Launch

## Featured Dock Items



### Connect-A-Port® XL5

59" x 156" x 23" (149.9 cm x 396.24 cm x 58.42 cm)

Weight: 320 lbs (145.15 kg)

Maximum Flotation: 1800 lbs (816.5 kg)

Model: CAPXL5



### Float Section FS1120 1000 Series - Low Profile

90" x 120" x 10" (228.6 cm x 304.8 cm x 25.4 cm)

Maximum flotation: 2800 lbs (1270 kg) per module

Freeboard: 8" (20.32 cm) above the water

### YAKport®

48"x 60" x 22" outside


(121.9 cm x 152.4 cm x 55.88 cm)

34"x 17" inside

(86.36 cm x 43.18cm)

KL1020

Create a safe/stable cradle for your Kayak  
Attach to Floating or Fixed Docks

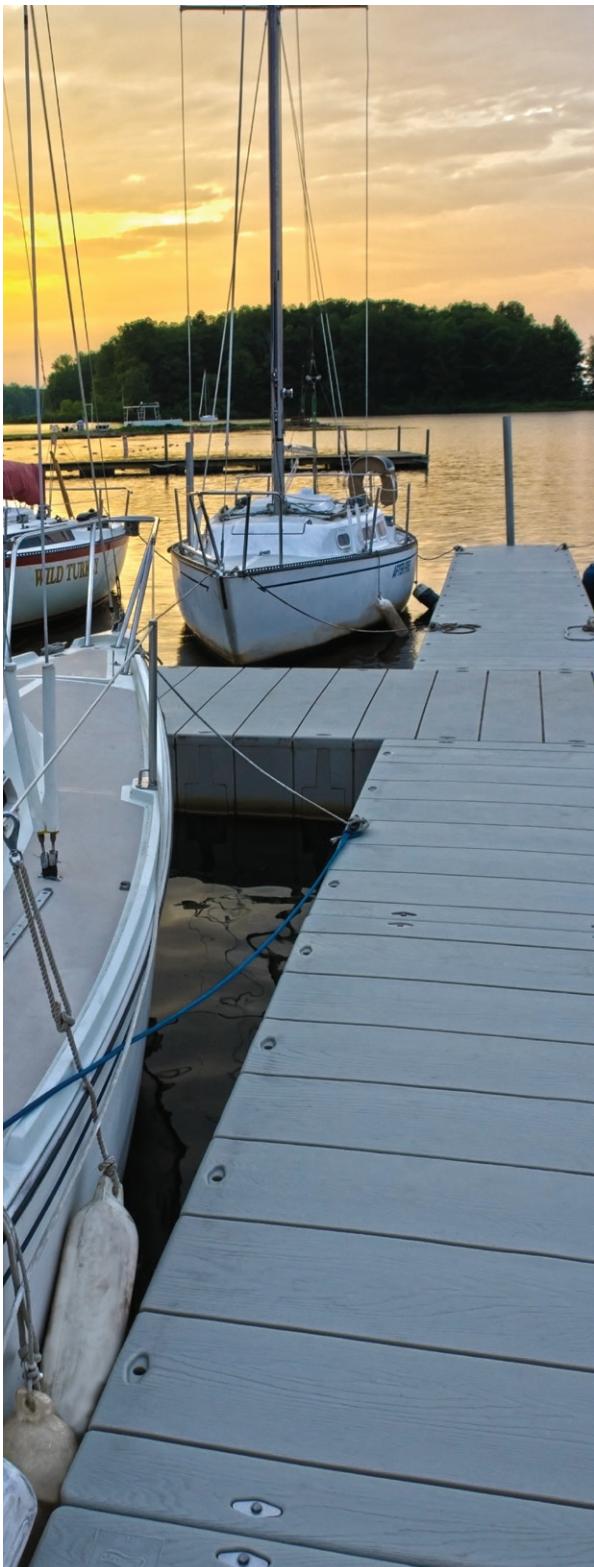

## Featured Dock Items

1000 Series & 2000 Series .....	ii
Kayak launch .....	
YAKport .....	2
PWC Docking .....	
Connect-A-Port .....	4

## 1000 Series - Low Profile (LP)

Specifications & Information .....	6
Components .....	8
Packages .....	14

## 2000 Series - High Profile (HP)

Specifications & Information .....	16
Components .....	20
Packages .....	26

## 1000 Series - (LP) & 2000 Series - (HP)

Anchoring .....	28
Technical Specifications .....	30
Installation, Warranties & Patents .....	32

## Dock Applications

1000 Series & 2000 Series .....	33
---------------------------------	----



# Easy on and off the water



Whether you're a seasoned paddler or just dipping your toes in the water for the first time, YAKport makes getting in and out of your kayak, canoe, or stand-up paddle board a breeze. With its wide, stable design, YAKport can accommodate boards up to 34 inches, ensuring a smooth and secure transition. Easily connect to the Connect-A-Dock® system and other floating or fixed docks. Equipped with launching and docking accessories like the roto grab bar and overhead assist for increased stabilization when entering and exiting the port.



### Benefits

- Provides a Safe & Stable Cradle for Loading and Unloading
- Accommodates Paddle Sport Vessels up to 34 inches
- Attaches to Any Dock Floating or Fixed Structure
- Available in 5 Colors – Tan, Light Grey, Dark Grey, Blue & Black
- Optional Entry Handles & Overhead Bar
- Ultraviolet Protected
- Environmentally Friendly
- Salt Water Safe



### YAKport

48" x 60" x 22" outside (121.9 cm x 152.4 cm x 55.88 cm)  
34" x 17" inside (86.36 cm x 43.18cm)  
Model: KL1020

### YAKport Colors




Tan

Light Gray

Blue

Dark Gray

Black

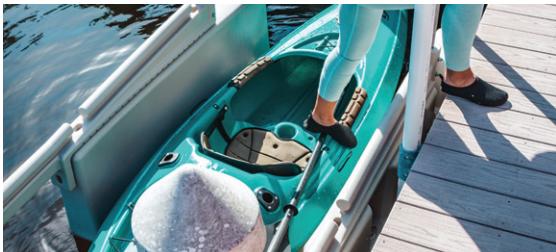

## Accessories



### Roto Grab Bars & Roto Overhead Assist (sold separately)

YAKGHR1020 - Grab Bar (Matching set)

YAK1022 - Overhead Assist

The Roto Grab Bars are available in five colors and can be used with or without the Overhead Assist. The Roto Grab Bars Side bars are required in order to use the Overhead Assist.



### YAK Bars

YAKGHL1020

Enter or exit from either end of the kayak launch. Yak Bars are sold individually and can not be used with an overhead bar.

## Anchoring



### Floating Dock Kit

YAKH1000 (Low Profile)

YAKH2000 (High Profile) \*Kit shown

For use when connecting to a floating dock with metal or wooden framing. Use model YAKH1000 (Low Profile) when the water line to top of the Hinge is ~ 18" or less, and anchor using the side of the port that has three connectors. Use model YAKH2000 (High Profile) when the water line to the top of the Hinge is up to ~ 28", and anchor using the side that has two connectors.



### Fixed Dock Kit

YAKF2001

When connecting to a fixed dock use the Pole Connectors to glide on 2" sch 40 pipe (not included) as water levels change.

Kit Includes:

- (2) Pole Bracket Sleeves
- (2) 1000 Series - Low Profile Pole Connector

\*Need 2 - 2" I.D. Pipe



### Float Connectors

YAK1000 - 1000 Series Connectors

YAK2000 - 2000 Series Connectors

Use when connecting to the Connect-A-Dock system. Three 1000 Series Connectors needed for the 1000 Series, and two 2000 Series Connectors needed for the 2000 Series.

# Personal Watercraft Docking



## XL5

59" x 156" x 23" (149.9 cm x 396.24 cm x 58.42 cm)  
Weight: 320 lbs (145.15 kg)  
Maximum Flotation: 1800 lbs (816.5 kg)  
Model: CAPXL5



## XL6

72" x 156" x 23" (182.88 cm x 396.24 cm x 58.42 cm)  
Weight: 375 lbs (170.1 kg)  
Maximum Flotation: 2000 lbs (907.2 kg)  
Model: CAPXL6

Experience effortless personal watercraft docking with Connect-A-Port. Connect-A-Port is a versatile docking system that can be easily attached to any dock —floating, fixed, or any Connect-A-Dock configuration. Simply roll off to launch and roll on to dock.

Connect-A-Port's premium urethane wheels offer a superior launching and docking experience. These high-quality wheels provide a smooth and effortless ride, ensuring your personal watercraft is always secure and easy to maneuver. Unlike plastic wheels that can crack or pop out, urethane wheels are built to last, giving you peace of mind and a worry-free docking experience.



## Benefits

- Up to Four-Place Pwcs
- Ultra Tough Construction
- Adjustable Roller Positions
- Cable & Clip For Securing PWC
- Anti-Skid Walk Area
- Universal Hull Support
- Front or Side Mounting
- Bow Stop (Removable)

## Options

- Connecting Hardware to Link Multiple Units Side by Side
- Attachment Kit for Fixed Docks & Other Floating Docks
- Mooring to Connect-A-Dock 2000 Series (Front Or Side)
- Bow Stop Winch
- Five Color Options

## Anchoring - XL6 & XL5



### Floating Dock

AKH1212

Available in all colors.



### Fixed Dock Attachment Kit

PC1212

Available in all colors.

Poles not included



### 2000 Series Attachment Kit

AKS1212

The 2000 Series Attachment Kit is used to attach to the Connect-A-Dock 2000 Series dock for front or side mounting.

## Other Anchoring Options



### PWC Pole Bracket Sleeve

AKFPSM



## Accessories



### Winch - Crank

AKW2001



### Side By Side - XL6 & XL5

AKC1212

Use to connect multiple Connect-A-Port units side-by-side.



(865) 224-3922

## Modular Floating Dock System



## Low Profile, 1000 Series Dock System

Designed for maintenance-free use as a floating boat dock and platform, the 1000 Series Low Profile Dock is designed for swimming, paddle sport boating, fishing, and other activities that require being a little close to the water. The 1000 Series is best suited for smaller bodies of water or coves that are protected from large waves.

The modular sections are quick and easy to install and can scale up or down based on changing needs. 1000 Series is versatile for residential use as well as commercial applications like rowing clubs, parks, and more.

Color:
Light Gray
Dimensions:
90" x 120" x 10" (225.6 cm x 304.8 cm x 25.4 cm)
Weight:
400 lbs (181.4 kg)
Maximum Flotation:
2800 lbs (1270kg)
Model:
FS1120



Connect-A-Dock is engineered with a skid-resistant surface that repels both water and the sun's extreme heat. The molded polyethylene construction ensures everyone will enjoy a splinter-free and nail-free time on the dock.



### However You Connect It — Make It Your Own

- Modular design
- 8" (20.32 cm) freeboard
- Easy to install
- Wood grain anti-skid surface
- UV protected
- Environmentally friendly
- Salt water safe

**1000 Series** is the logical choice for extending your waterfront enjoyment providing the ultimate versatility in configuration, simple installation and extreme durability. Designed for maintenance-free use as a floating boat dock and platform, the 1000 - Low Profile is best suited for smaller bodies of water or coves that are protected from large waves. Perfect for swimming, kayaking and fishing.

The **modular connection system** allows you to configure, re-arrange and expand your dock in an unlimited variety of shapes and sizes. Go to page 16-17 to see examples of popular configurations.



## 1000 Series - Components



### 90" x 120" Float Section

90" x 120" x 10"  
(228.6 cm x 304.8 cm x 25.4 cm)

FS1120

The primary component of the slip fit connection system.

### 45" x 60" Float Section

45" x 60" x 10"  
(114.3 cm x 152.4 cm x 25.4 cm)

FS1060

The primary component of the slip fit connection system.



### 45" x 30" Float Section

45" x 30" x 10"  
(114.3 cm x 76.2 cm x 25.4 cm)

FS1030

A smaller float section half the size of the FS1060 for use when extra length is required.

### Corner Float Section

44" x 33" x 10"  
(111.8 cm x 83.8 cm x 25.4 cm)  
CFS1010  
Adds strength, stability and extra walking space to the fingers of your dock.



### Float Connector

7" x 6" x 9"  
(17.78 cm x 15.24 cm x 22.86 cm)  
FC1010  
Slip fits into the Float Section sockets to hold the sections together.



### 2" Pole Connector

10" x 6" x 10"  
(25.4 cm x 15.24 cm x 25.4 cm)  
PC1010  
Slips into the outer sockets of the dock and used for anchoring.



### 2" Pole Cover

41"  
(104.14 cm)  
PC1002  
Improves appearance of anchoring poles.



### Extra Flotation

29.5" x 14" x 9.5"  
(74.9 cm x 35.5 cm x 24.1 cm)  
EF1010  
Slips under dock to provide extra flotation where needed.



### Accessory Connector

3.5" x 6" x 9"  
(8.89 cm x 15.24 cm x 22.86 cm)  
AC1000  
Accessories can be attached to this handy connector.



### Finishing Connector

2.5" x 6.2" x 9.3"  
(6.35 cm x 15.75 cm x 23.6 cm)  
FC1000  
Fill the outer connector sockets of your dock for a finished look.



### Cleat

7" x 1.35"  
(17.78 cm x 3.43 cm)  
8C1020  
Keeps your watercraft tied near the dock.



### Kayak Rack

6' x 18.25"

(182.9 cm x 46.36 cm)

KR1020

Store two kayaks on your dock.



### Stationary Swim Ladder

27" x 59.25"

(68.6 cm x 150.5 cm)


SL1020

Metal Accessory Connectors are required to attach to a 1000 Series dock.





**1000 Series Metal Accessory Connector**  
4.5" x 5.5" x 10"  
(11.4 cm x 14 cm x 25.4 cm)  
4-5021  
Add accessories to dock sections or connect to other docks.



**1000 Series Connector Male Hinge**  
6.5" x 5.5" x 10"  
(16.5 cm x 14 cm x 25.4 cm)  
4-5022  
Attach 1000 Series float sections to other docks at different heights.



**Female Hinge**  
5" x 3" x 12.75"  
(12.7 cm x 7.6 cm x 32.4 cm)  
4-5024  
Attach 1000 Series float sections to other docks.



**5 x 5 Hinge**  
5" x 5" x 3.5"  
(12.7 cm x 12.7 cm x 8.9 cm)  
5x5 Hinge Male - 4-5025  
5x5 Hinge Female - 4-5023  
Pin/Clip - 401-5026  
Attach 1000 Series float sections to other docks.  
\*Parts sold together or separately



**Self-Wicking Planter**  
10" diameter x 11.625"  
(25.4 cm diameter x 29.5 cm)  
SWP1020  
Enjoy your favorite flowers and plants.



**Edge Bumper**  
2.5" x 3.5" x 8'  
(6.35 cm x 8.89 cm x 243.84 cm)  
EB1020  
Wheelchair edge bumper.

## 1000 Series - Components



### 26" Guardrail

26" x 40"  
(66.04 cm x 101.6 cm)  
GR1026  
(2 AC1000 Accessory Connectors and Hardware included)



### Gangway Hinge 44" (Shown)

44" x 4"  
(118.8 cm x 10.16 cm)  
GH2010 - Stainless steel  
\* Also available in Galvanized



### 41" Guardrail

41" x 40"  
(104.14 cm x 101.6 cm)  
GR1041  
(2 AC1000 Accessory Connectors and Hardware included)

### Gangway Hinge 54"

54" x 8"  
(137.16 cm x 20.32 cm)  
GHG5  
\* Used only with GW1024, GW1028, or GW1032



### 4' x 8' Aluminum Gangway with Handrails (Shown)

4' x 8' x 3'  
(121.9 cm x 243.8 cm x 91.4 cm)  
GWA4X8



### 56" Guardrail

56" x 40"  
(142.24 cm x 101.6 cm)  
GR1056  
(2 AC1000 Accessory Connectors and Hardware included) Strong aluminum guardrails offer safety

### Gangway Hinge 56"

56" x 6.94"  
(142.24 cm x 17.63 cm)  
GH2156 - Stainless steel  
\* Also available in Galvanized

### 4' x 12' Aluminum Gangway with Handrails

4' x 12' x 3'  
(121.9 cm x 365.8 cm x 91.4 cm)  
GWA4X12



### Gangway 4' x 4' (shown)

49.96" x 53.7"  
(126.9 cm x 136.4 cm)  
GW1024



### Gangway 4' x 8'

49.96" x 98.8"  
(126.9 cm x 250.95 cm)  
GW1028

### Gangway 4' x 12'

49.96" x 144"  
(126.9 cm x 365.76 cm)  
GW1032  
Light weight frame with slip resistant panels.



(865) 224-3922

**Note: Additional aluminum gangways are available on special order from the manufacturer.**



### **Solar Light**

3.36" x 1.68 x 7.73"  
(8.54 cm x 4.27 cm x 19.6 cm)  
SLD1020  
Light up the dock edge at night.  
Sold in pairs



### **Solar Pole Light**










LL-SKL-L10-S30  
When motion is detected the super  
bright LEDs light your dock. 12-  
watt solar panel with a 5-watt LED  
\* Pole not included



### **Piling Pole Cap**




In Black or White  
Sizes: 2" or 3"

## 1000 Series - Dock Packages (F, L, Swim Platform)

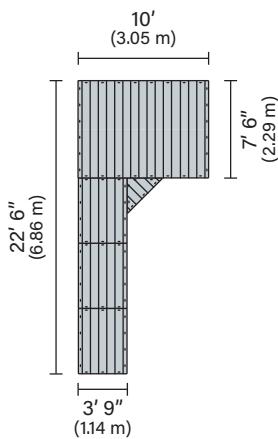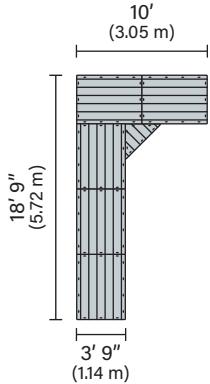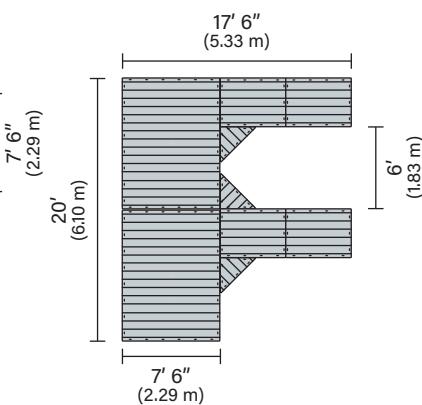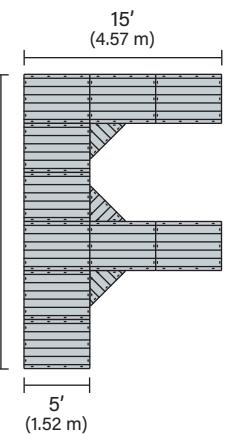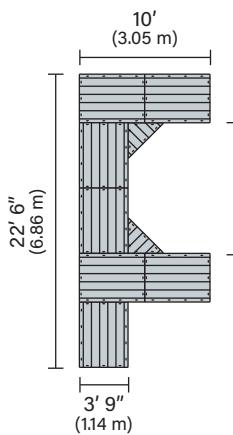

**Mix, Rearrange or Change – Add Cleats, Gangway, Swim Ladder & More**

## 1000 Series - Dock Packages (F, L, Swim Platform)

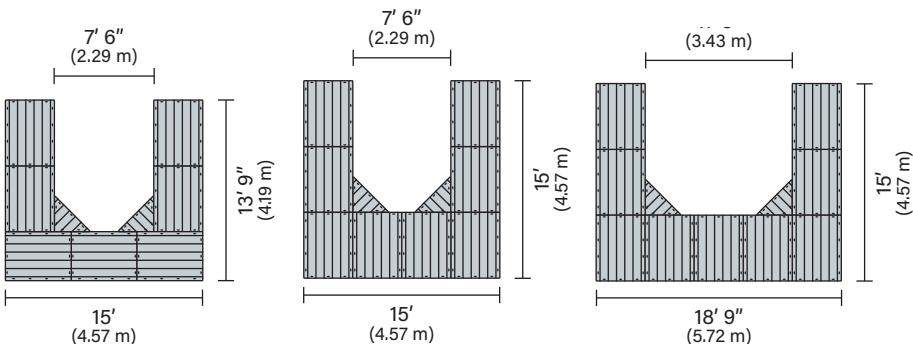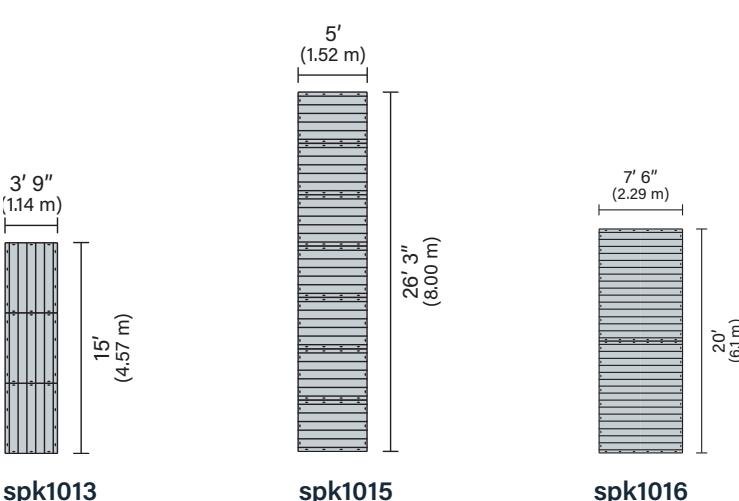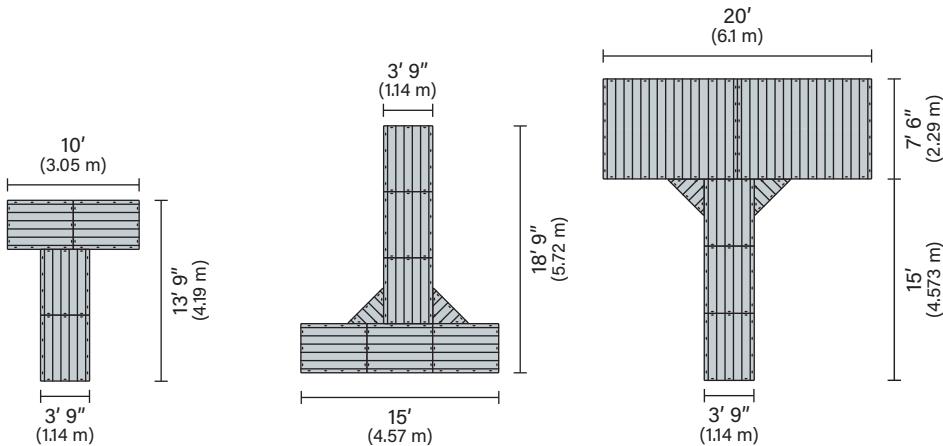

# Modular Floating Dock System



## Floating Docks for Residential & Commercial Use

**A season's worth of adventures awaits** with your floating dock, including parties, sunbathing, swimming, fishing, and boating. A Connect-A-Dock system will prove to be a worthwhile addition to the value of your property. The 2000 Series high profile dock is also ideal for commercial applications like marinas and parks because of its increased modularity.

These docks can be expanded to any width or length, making it easy to accommodate additional docking slips or reconfiguring for various boat sizes. Stable, completely versatile and extremely durable, the Connect-A-Dock system is easy to install and virtually maintenance free. The modular float sections can be assembled into a variety of attractive configurations, then rearranged season after season. Go to page 30-31 to see examples of popular configurations.

Color:
Light Gray
Dimensions:
72" x 120" x 20" (182.9 cm x 304.8 cm x 51 cm)
Weight:
420 lbs (190.51 kg)
Maximum Flotation:
4800 lbs (2177 kg)
Model:
FS2120



Connect-A-Dock is engineered with a skid-resistant surface that repels both water and the sun's extreme heat. The molded polyethylene construction ensures everyone will enjoy a splinter-free and nail-free time on the dock.



### However You Connect It — Make It Your Own

- Modular design
- 17" (43.18 cm) freeboard
- Easy to install
- Wood grain anti-skid surface
- UV protected
- Environmentally friendly
- Salt water safe

**2000 Series creates a substantial and attractive** presence on the waterfront. Its modular design and rugged construction make Connect-A-Dock the simplest, most reliable way to build floating decks and boat docks for larger boats at home, in resorts and at marinas. Use it to provide safe and enjoyable access to the water for your family, and the community!

**Connect-A-Port PWC Drive On adds a safe harbor** for your one, two, or three seat personal watercraft! Docking is easy with the unique bow stop. Launching is a breeze — just roll off and you are ready to go! Attaches easily to the 2000 series dock or to other floating and fixed dock setups.





## 72" x 120" Float Section

72" x 120" x 20"  
(182.9 cm x 304.8 cm x 51 cm)  
FS2120  
A primary component for the 2000 Series system.

## 48" x 96" Float Section

48" x 96" x 20"  
(122 cm x 244 cm x 51 cm)  
FS2096  
A primary component for the 2000 Series dock system.



## Corner Float Section

48" x 67" x 20"  
(121.9 cm x 170.1 cm x 50.8 cm)  
CFS2022  
Adds strength, stability and extra walking space to the fingers of your dock.

## 2' x 4' Float Section

24" x 48" x 20"  
(60.96 cm x 122 cm x 50.8 cm)  
FS2024  
Adds two feet to any section on your Connect-A-Dock.

## Pole Connector

14" x 9" x 20"  
(35.56 cm x 22.86 cm x 50.8 cm)  
2" - PC2022  
3" - PC2023  
Slips into the outer sockets of the dock and used for anchoring.

## Dual Pole Connector

12.52" x 20" x 40"  
(31.8 cm x 50.8 cm x 101.6 cm)  
DPC2023  
Two connection points for added strength.



## Float Connector

12" x 9" x 20"  
(30.48 cm x 22.86 cm x 50.8 cm)  
FC2020  
Slip fits into the Float Section sockets to hold the sections together.

## Extra Flotation

48" x 24" x 14"  
(122 cm x 60.96 cm x 35.5 cm)  
EF2020  
Slips under your dock to provide extra lift where needed.

## 2" Pole Cover

41"  
(104.14 cm)  
PC1002  
Improves appearance of anchoring poles.

## 2000 Bumper

10.6" x 10.6" x 20"  
(26.9 cm x 26.9 cm x 51 cm)  
DB2000  
2000 Bumper attaches in the float section sockets.



### Connect-A-Port XL6

72" x 156" x 23"  
(182.88 cm x 396.24 cm x 58.42 cm)  
CAPXL6

PWC Drive On adds a safe harbor for your one-, two- or three-seat personal watercraft. Connect to the 2000 Series dock, floating docks or fixed docks.

### Connect-A-Port XL5

59" x 156" x 23"  
(149.9 cm x 396.24 cm x 58.42 cm)  
CAPXL5

### Connection Kits XL6 & XL5

2000 Series Attachment Kit  
AKS2000  
PWC Side by Side Kit  
AKC2002



### Accessory Connector

5.75" x 19.125" x 8.625"  
(14.60 cm x 48.57 cm x 21.91 cm)  
AC2000  
Accessories can be attached to this handy connector.

### Finishing Connector

3" x 19" x 9"  
(7.62 cm x 48.26 cm x 22.86 cm)  
FC2000  
Fill the outer connector sockets of your dock for a finished look.



(865) 224-3922



## 2000 Series - Components



**Gangway 4' x 4'**  
49.96"x 53.7"  
(126.9 cm x 136.4 cm)  
GW1024

**Gangway 6' x 8'**  
72.5"x 96"  
(184.15 cm x 243.84 cm)  
GW1036

**Gangway Hinge 44" (Shown)**  
44" x 4"  
(118.8 cm x 10.16 cm)  
GH2010 - Stainless Steel  
\* Also available in Galvanized

**Gangway 4' x 8' (shown)**  
49.96"x 98.8"  
(126.9 cm x 250.95 cm)  
GW1028

**Gangway Hinge 54"**  
54" x 8"  
(137.16 cm x 20.32 cm)  
GHGK5  
\* Used only with GW1024, GW1028, or GW1032

**Gangway 4' x 12'**  
49.96"x 144"  
(126.9 cm x 365.76 cm)  
GW1032  
Lightweight frame with slip  
resistant panels.

**Gangway Hinge 56"**  
56" x 6.94"  
(142.24 cm x 17.63 cm)  
GH2156 - Stainless Steel  
\* Also available in Galvanized



**Note: Additional aluminum gangways are available on special order from the manufacturer.**



### 4' x 8' Aluminum Gangway with Handrails (Shown)

4' x 8' x 3'  
(121.9 cm x 243.8 cm x 91.4 cm)  
GWA4X8

### 4' x 12' Aluminum Gangway with Handrails

4' x 12' x 3'  
(121.9 cm x 365.8 cm x 91.4 cm)  
GWA4X12

### 4' x 16' Aluminum Gangway with Handrails

4' x 16' x 3'  
(121.9 cm x 487.7 cm x 91.4 cm)  
GWA4X16

### Stationary Swim Ladder

27" x 59.25"  
(68.6 cm x 150.5 cm)  
SL1020  
Metal Accessory Connectors are required to attach to a 2000 Series dock.



### Cleat

7" x 1.35"  
(17.78 cm x 3.43 cm)  
8C1020  
A strong, secure tie off for your mooring lines.



### Dual Cleat

11" x 2.25"  
(27.94 cm x 5.72 cm)  
DC2000  
Connect the stainless steel cleat at two connector points.



(865) 224-3922

## 2000 Series - Components



**Utility Channel - Straight**  
49.56" x 24" x 20"  
(125.88 cm x 60.96 cm x 50.8 cm)  
UT2048

Run water, electrical or sewer conduit lines.



**Utility Channel - Corner**  
47.91" x 47.91" x 20"  
(121.7 cm x 121.7 cm x 50.8 cm)  
UTC2048



**Utility Channel - Cube**  
23.81" x 24" x 20"  
(60.47 cm x 60.96 cm x 50.8 cm)  
UT2048



**Harbor Light**  
42.5" x 11.125" x 11.125"  
107.95 cm x 28.26 cm x 28.26 cm  
HL301000  
Add water, electrical lines



**Marina Mate SS**  
30" x 7" x 7"  
76.2 cm x 17.78 cm x 17.78 cm  
MMSS2050  
Add water, electrical lines



**Fire Station**  
42.5" x 11.125" x 11.125"  
107.95 cm x 28.26 cm x 28.26 cm  
FS1020  
A complete solution for fire and rescue needs.



**Bayside Utility Center**  
14.5" x 11" x 10.625"  
36.83cm x 27.94cm x 61.29cm  
BU3050  
Host to a variety of electrical services, contained in a compact yet strong housing.



### 2000 Series Bench

48" x 22" x 38.5"  
(121.92 cm x 55.88 cm x 97.79 cm)  
BH2000

Take time to sit back and enjoy life  
on your bench.



### Kayak Rack

6' x 18.25"  
(182.9 cm x 46.36 cm)  
KR1020

Store two Kayaks on your dock.



### Edge Bumper

2.5" x 3.5" x 8'  
(6.35 cm x 8.89 cm x 243.84 cm)  
EB1020

Wheelchair edge bumper.



### Piling Pole Cap

In Black or White  
Sizes: 2" or 3"



### Female Hinge

5" x 3" x 12.75"  
(12.7 cm x 7.6 cm x 32.4 cm)  
4-5024

Use to attach 2000 Series float  
sections to other docks.



### 2000 Series Metal Accessory Connector

7" x 8.125" x 17.125"  
(17.78 cm x 20.64 cm x 43.18 cm)  
4-5679

Add accessories to dock sections or connect to other  
docks.



### 5 x 5 Hinge

5" x 5" x 3.5"  
(12.7 cm x 12.7 cm x 8.9 cm)

5x5 Hinge Male - 4-5025

5x5 Hinge Female - 4-5023

Pin/Clip - 401-5026

Attach 2000 Series float sections  
to other docks.

\*Parts sold together or separately




### Self-Wicking Planter

10" diameter x 11.625"  
(25.4 cm diameter x 29.5 cm)  
SWP1020

Enjoy your favorite flowers and plants  
while you relax on your dock.

## 2000 Series - Components

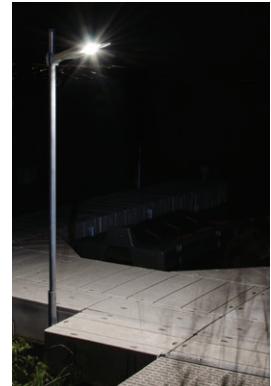

### 44" Guardrail

44" x 40"  
(111.76 cm x 101.6 cm)

GR2044

Color: brown or white  
(2 AC2000 Accessory Connectors and  
Hardware included)



### Solar Light

3.36" x 1.68 x 7.73"  
(8.54 cm x 4.27 cm x 19.6 cm)

SLD1020

Light up the dock edge at night.  
Sold in pairs



### Solar Pole Light

LL-SKL-L10-S30

When motion is detected the super  
bright LEDs light your dock. 12-  
watt solar panel with a 5-watt LED

\* Pole not included




### 67" Guardrail

67" x 40"  
(170.18 cm x 101.6 cm)

GR2067

Color: brown or white  
(2 AC2000 Accessory Connectors and  
Hardware included)



### 92" Guardrail


92" x 40"  
(233.68 cm x 101.6 cm)

GR2092

Color: brown or white  
(2 AC2000 Accessory Connectors and  
Hardware included)  
Strong powder coated, steel guardrails.



(865) 224-3922

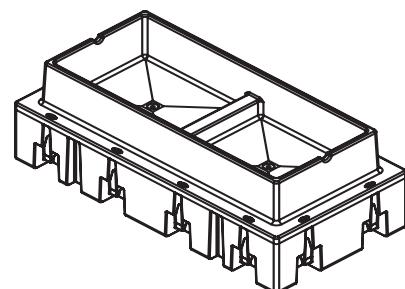

### Schwig's Garden Box™

48" x 96" x 24"  
(122 cm x 244 cm x 61 cm)

SBOX20

Floating garden box for growing plants &  
produce connects to 2000 Series dock.



Use our Design a Dock tool to explore your dream layout

CONNECT-A-DOCK  
**DESIGN A DOCK**

2000 SERIES - HIGH PROFILE ▾  
NEED HELP? / INSTRUCTIONS ▾

DOCK SECTIONS	GANGWAYS / RAILS	DOCK ACCESSORIES	ADDITIONAL PARTS
 FLOAT SECTION 24 X 48	 FLOAT SECTION 48 X 96	 FLOAT SECTION 72 X 120	 CORNER FLOAT SECTION 48 X 67
 UTILITY CORNER 44 X 48	 UTILITY CORNER 44 X 48	 UTILITY CORNER 24 X 48	

NEED ADDITIONAL INFORMATION


APPROXIMATE CONNECTORS REQUIRED: 15

[VIEW PARTS LIST](#) [EMAIL PARTS LIST](#) [PRINT](#)



\*email will be sent to all above along with a CAD sales rep

Scan the QR code to design your own 1000 Series or 2000 Series dock layout.

## 2000 Series - Dock Packages (F, L, Deck)

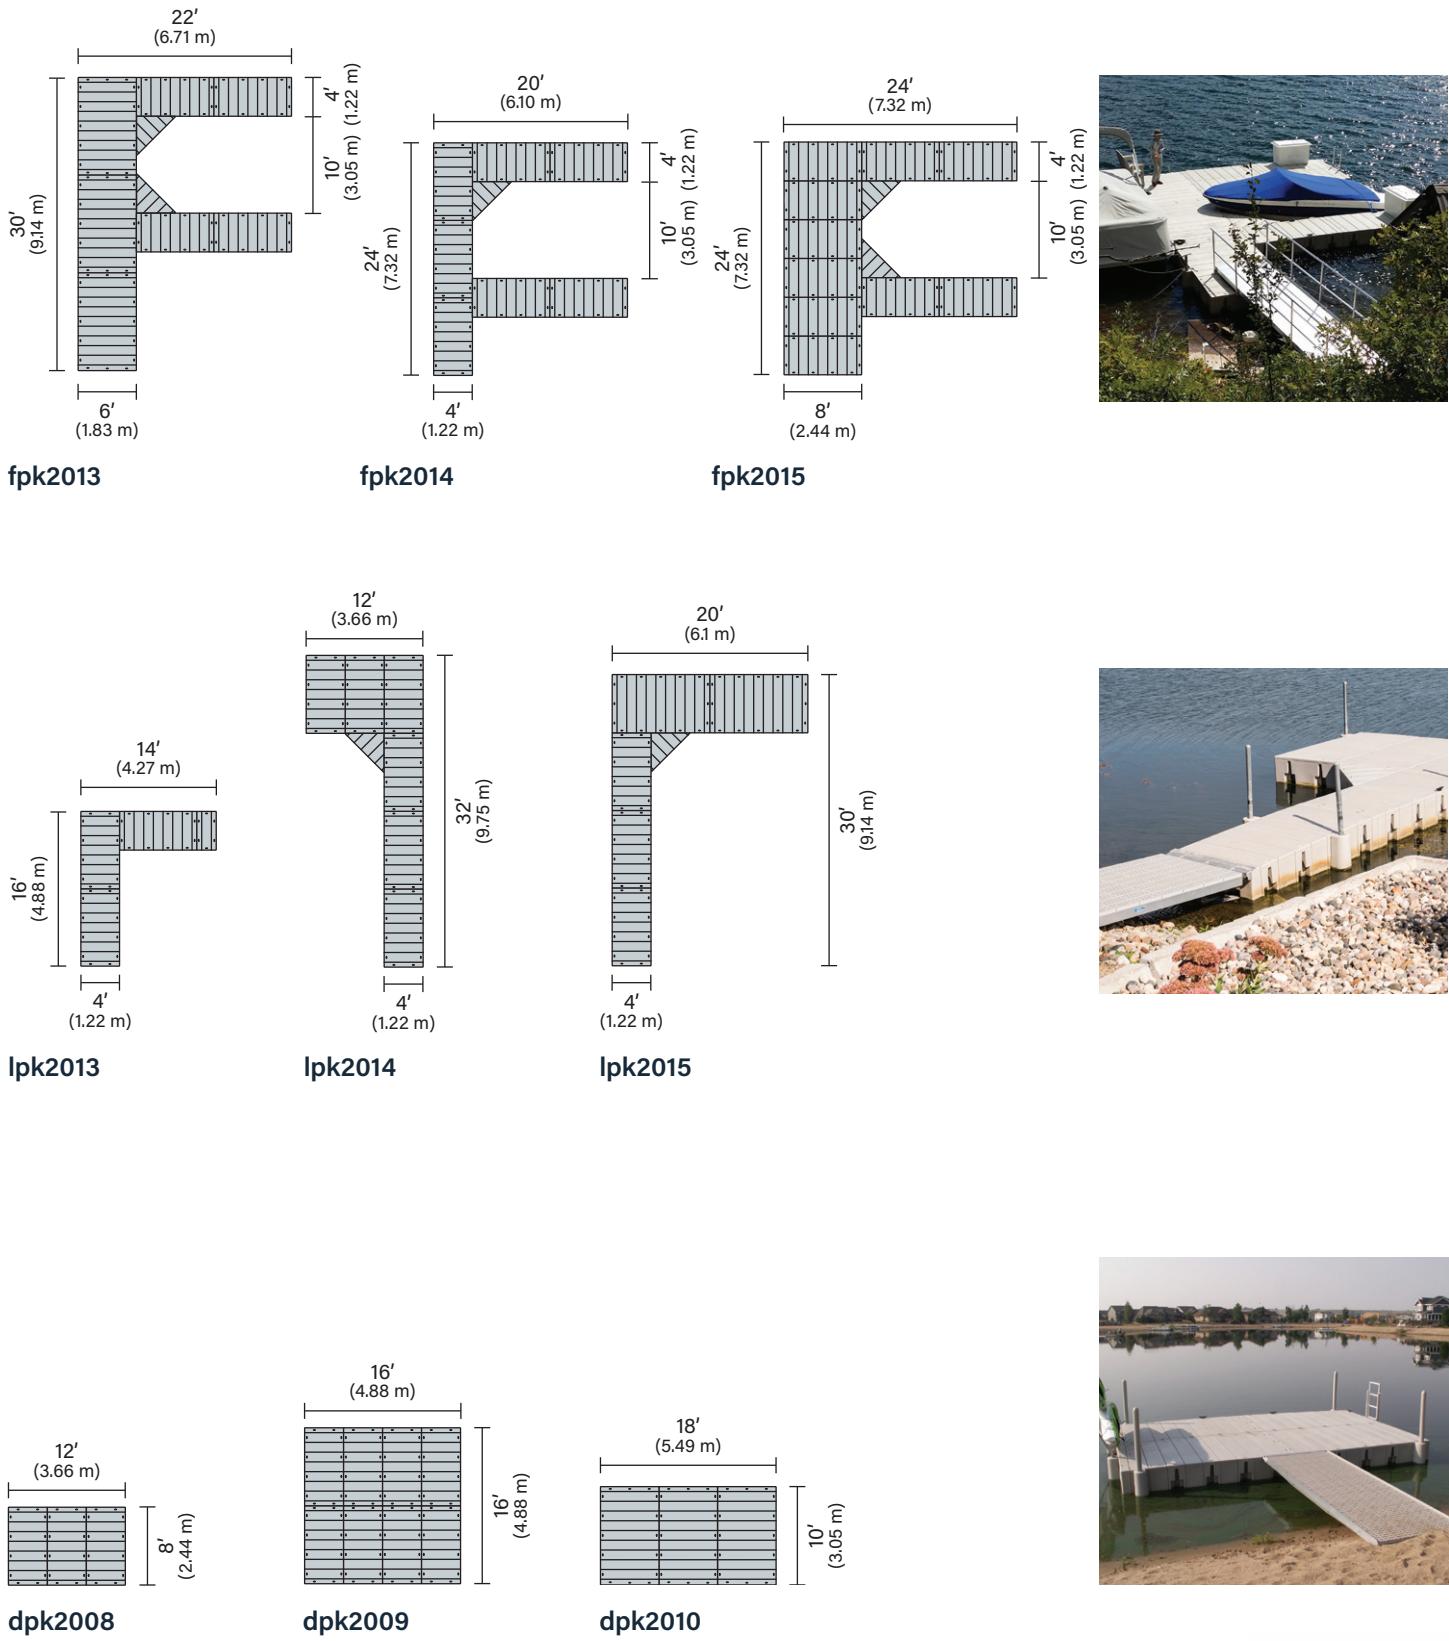




## 2000 Series - Dock Packages (T, Straight, U)

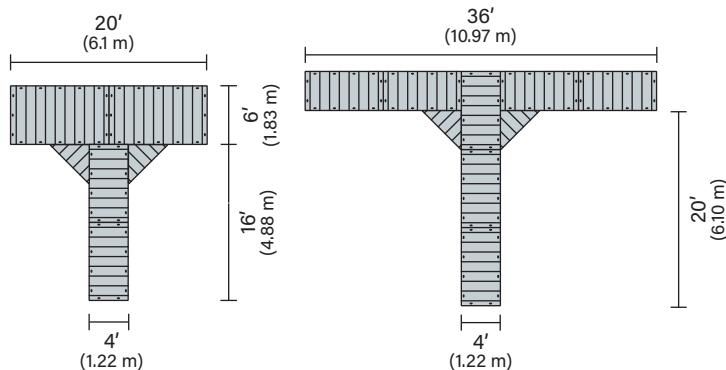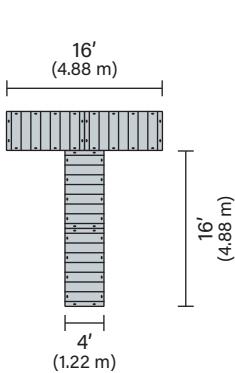

tpk2012

tpk2013




tpk2014



spk2010

spk2011

spk2012

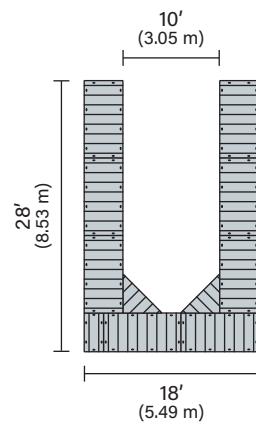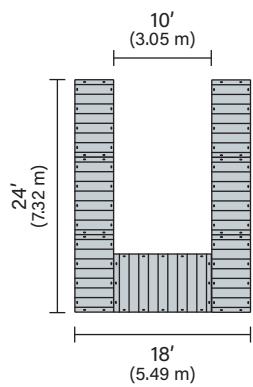

upk2015

upk2016

upk2017

### Stiff Arm



Dock anchoring methods listed in this book are only suggestions. It is up to you to determine which method suits your needs. Find a local dealer at [connectadock.com](http://connectadock.com) to advise on your specific needs.

Unless stated, anchoring items can be used for both 1000 SERIES (LP) & 2000 SERIES (HP) dock systems.



#### Stiff Arm Fittings

2" (5.08 cm) Id pole

SAF1020


Connects a pole to the permanent land fitting and the Stiff Arm Bracket.



#### Stiff Arm Bracket

SAB1020

Attaches to the side of the dock and provides slot for Stiff Arm Fitting.

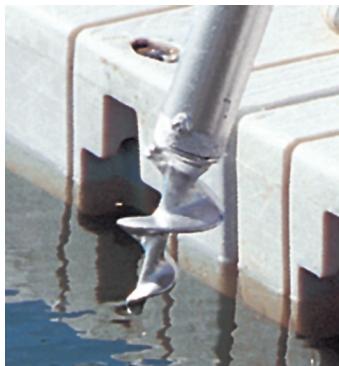

#### 2" Pole Auger

2" id pole (5.08 cm)

PA1002

Attaches to poles for easy anchoring.

## Gangway



**Roller Kit**  
2" x 10.5" x 3"  
(5.08 cm x 26.67 cm x 7.62 cm)  
RK1020 - (sold in pairs)  
Allows gangway to roll on the dock in fluctuating waters.



**Gangway Hinge 44"**  
44" x 4" x 1/8"  
(111.8 cm x 10.16 cm x 0.32 cm)  
GH2010 - Stainless Steel  
Enables connection from gangway to dock and allows the gangway to fold 180° (wood plank not included).  
\* Also available in Galvanized

**Gangway Hinge 54"**  
54" x 8"  
(137.16 cm x 20.32 cm)  
GHGW5  
\* Used only with GW1024, GW1028, or GW1032

**Gangway Hinge 56"**  
56" x 6.94"  
(142.24 cm x 17.63 cm)  
GH2156 - Stainless Steel  
\* Also available in galvanized

## Piling Loop



### 10" (25.4 cm) Piling Loop

PL1010  
Lets your dock ride on the pilings of a pier or other piling structures. Perfect for fluctuating waters.

**Other piling loop sizes:**  
**12" (30.48 cm)**  
PL1012  
**14" (35.56 cm)**  
PL1014  
**16" (40.64 cm)**  
PL1016  
**18" (45.72 cm)**  
PL1018

## Chain



**Deep Water Hardware**  
**1000 Series**  
DW1010  
Anchors a dock or Swim Platform in deep water.

**2" Dead Man Collar**  
**1000 Series**  
DM1002  
**2000 Series**  
DM2002  
Use with Pole Connector to anchor any dock in deep water with chain and weight.

# Technical Specifications

## 1000 Series - Low Profile

	Model	Size	Weight	Deck Surface Square Footage	Maximum Flotation
45" x 30" Float Section	FS1030	30" x 45" x 10" (76.2 cm x 114.3 cm x 25.4 cm)	50 lbs (22.68 kg)	9.375 ft <sup>2</sup> (0.871 m <sup>2</sup> )	325 lbs (147 kg) per section
45" x 60" Float Section	FS1060	60" x 45" x 10" (152.4 cm x 114.3 cm x 25.4 cm)	110 lbs (49.9 kg)	18.75 ft <sup>2</sup> (1.74 m <sup>2</sup> )	690 lbs (313 kg) per section
90" x 120" Float Section	FS1120	90" x 120" x 10" (228.6 cm x 304.8 cm x 25.4 cm)	400 lbs (181.4 kg)	75 ft <sup>2</sup> (22.86 m <sup>2</sup> )	2800 lbs (1270 kg) per section
44" x 33" Corner Float Section	CFS1010	44" x 33" x 10" (111.8 cm x 83.8 cm x 25.4 cm)	30 lbs (13.6 kg)	5.05 ft <sup>2</sup> (0.469 m <sup>2</sup> )	150 lbs (68 kg) per section
Extra Flotation	EF1010	29.5" x 14" x 9.5" (74.9 cm x 35.5 cm x 24.1 cm) Can be stacked into each other for added buoyancy	9 lbs (4.08 kg)	—	60 lbs (27.21 kg) per section
Extra Hardware	EH1000	— 6 per pack	—	—	—
2" Pole Connector	PC1010	10" x 6" x 10" (25.4 cm x 15.24 cm x 25.4 cm) max 2.375" (6.03 cm) pole	4 lbs (1.81 kg)	—	—
Accessory Connector	AC1000	3.5" x 6" x 9" (8.89 cm x 15.24 cm x 22.86 cm) 5" (12.7 cm) distance on center for t-nuts 3/8"-16 UNC x 5/8" (10 mm)	1.7 lbs (0.77 kg)	—	—

### Freeboard

8" (20.32 cm)

### Live Load

35 lbs/foot<sup>2</sup> (170 kilogram/meter<sup>2</sup>)

### Anchoring Connectors Sockets

Max-15" (38.1 cm) apart

### Material

Average Wall Thickness

Linear Low Density Polyethylene Plastic

1/4" (0.635 cm)

## 2000 Series - High Profile

	Model	Size	Weight	Deck Surface Square Footage	Maximum Flotation
72" x 120" Float Section	FS2120	72" x 120" x 20" (182.9 cm x 304.8 cm x 51 cm)	420 lbs (190.5 kg)	60 ft <sup>2</sup> (5.57 m <sup>2</sup> )	4800 lbs (2177 kg) per section
48" x 96" Float Section	FS2096	48" x 96" x 20" (122 cm x 244 cm x 51 cm)	230 lbs (104.3 kg)	32 ft <sup>2</sup> (2.97 m <sup>2</sup> )	2500 lbs (1134 kg) per section
2' x 4' Float Section	FS2024	48" x 24" x 20" (122 cm x 60.96 cm x 51 cm)	60 lbs (27.22 kg)	8 ft <sup>2</sup> (0.47 m <sup>2</sup> )	600 lbs (272 kg) per section
		Staggering with alternating 2096 sections will add strength & stability			
48" x 67" Corner Float Section	CFS2022	48" x 67" x 20" (121.9 cm x 170.1 cm x 50.8 cm)	75 lbs (34 kg)	21 ft <sup>2</sup> (1.95 m <sup>2</sup> )	550 lbs (249.5 kg) per section
Extra Flotation	EF2020	48" x 24" x 14" (121.9 cm x 60.96 cm x 35.5 cm) Can be stacked into each other for added buoyancy	30 lbs (13.6 kg)	—	300 lbs (136 kg) per section
Extra Hardware	EH2000	— 6 per pack	—	—	—
2" Pole Connector	PC2022	9" x 14" x 20" (22.86 cm x 35.56 cm x 50.8 cm) max 2.375" (6.03 cm) pole	12 lbs (5.44 kg)	—	—
3" Pole Connector	PC2023	9" x 14" x 20" (22.86 cm x 35.56 cm x 50.8 cm) max 3.5" (8.89 cm) pole	12 lbs (5.44 kg)	—	—
Dual Pole Connector	DPC2023	14.5" x 40" x 20" (36.8 cm x 101.6 cm x 50.8 cm) max 3.5" (8.89 cm) pole	30 lbs (13.6 kg)	—	—
Accessory Connector	AC2000	5.75" x 19.125" x 8.625" (14.60 cm x 48.57 cm x 21.91 cm) 9.188" (23.34 cm) distance on center for t-nuts 3/8"-16 UNC X 5/8" (10 mm) Attaches to 2000 Series and fixed docks. Multiple units can be linked.	4 lbs (1.81 kg)	—	—
Utility Channel - Straight	UT2048	49.56" x 24" x 20" (125.88 cm x 60.96 cm x 50.8 cm)	79.5 lbs (36 kg)	8 ft <sup>2</sup> (0.74 m <sup>2</sup> )	600 lbs (272 kg)
Utility Channel - Corner	UTC2048	47.91" x 47.91" x 20" (121.7 cm x 121.7 cm x 50.8 cm)	116 lbs (52.6 kg)	12 ft <sup>2</sup> (1.1 m <sup>2</sup> )	800 lbs (362.9 kg)
Utility Channel - Cube	UT2024	23.81" x 24" x 20" (60.47 cm x 60.96 cm x 50.8 cm)	42 lbs (19.1 kg)	4 ft <sup>2</sup> (0.37 m <sup>2</sup> )	800 lbs (362.9 kg)

### Freeboard

17" (43.18 cm)

75 lbs/foot<sup>2</sup> (365 kilogram/meter<sup>2</sup>)

### Anchoring Connectors Sockets

Max-24" (60.96 cm) apart

### Material

Average Wall Thickness

Linear Low Density Polyethylene Plastic


1/4" (0.635 cm)

## Connect-A-Port®

	Model	Size	Weight	Deck Surface Square Footage	Maximum Flotation
Connect-A-Port XL6	CAPXL6	72" x 156" x 23" (182.88 cm x 396.24 cm x 58.42 cm) Attaches to 2000 Series and fixed docks. Multiple units can be linked.	375 lbs (170.1 kg)	—	2000 lbs (907.2 kg)
Connect-A-Port XL5	CAPXL5	59" x 156" x 23" (149.9 cm x 396.24 cm x 58.42 cm) Attaches to 2000 Series and fixed docks. Multiple units can be linked.	325 lbs (147.4 kg)	—	1800 lbs (816.4 kg)

## YAKport®

	Model	Size	Weight	Deck Surface Square Footage	Maximum Flotation
YAKport	KL1020	48" x 60" x 22" (122 cm x 152 cm x 56 cm) Attaches to 1000 Series, 2000 Series, other floating and and fixed docks.	99 lbs (44.91 kg)	—	300 lbs (136.1 kg)

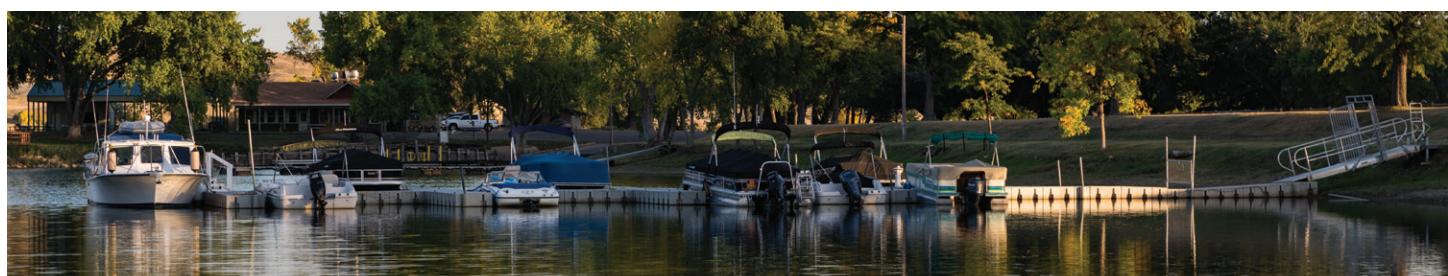

## Anchoring & Accessories

Anchoring & Accessories are for both 1000 Series and 2000 Series unless stated.

Model	Material	Other
4' x 4' Gangway	GW1024 Galvanized Steel, Aluminum & Plastic	—
4' x 8' Gangway	GW1028 Galvanized Steel, Aluminum & Plastic	—
4' x 12' Gangway	GW1032 Galvanized Steel, Aluminum & Plastic	—
4' x 8' Gangway w/Handrails	GWA4X8 Aluminum	Load Rating 50 lbs per sq ft (244.1 kg per sq m)
4' x 12' Gangway w/Handrails	GWA4X12 Aluminum	Load Rating 50 lbs per sq ft (244.1 kg per sq m)
4' x 16' Gangway w/Handrails	GWA4X16 Aluminum	Load Rating 50 lbs per sq ft (244.1 kg per sq m)
Gangway Hinge	GH2010 Stainless Steel	Used when constructing your own gangway
Roller Kit	RK1020 Galvanized Steel & Rubber Roller	Sold in pairs
Swim Ladder	SL1020 Aluminum	450 lbs (204.12 kg) load capacity
2" Pole Cover	PC1002 Linear Low Density Polyethylene Plastic	Ø 3.070 opening
2" Pole Auger	PA1002 Aluminum	Min 2" (5.08 cm) id Pole size
2" Dead man Collar (1000 Series)	DM1002 Galvanized Steel	Used with 2" Pole Connector PC1022 and .3125" (.794 cm) max size for chain slot
2" Dead man Collar (2000 Series)	DM1002 Galvanized Steel	Used with 2" Pole Connector PC2022 and .3125" (.794 cm) max size for chain slot
Deep Water Hardware (1000 Series)	DW1010 Stainless Steel	Attaches to dock connector socket
Stiff Arm Fittings	SAF1020 Galvanized Steel	Can be used with 2" (5.08 cm) id pipe
Stiff Arm Bracket	SAB1020 Galvanized Steel	—
Piling Loop -		
10" (25.4 cm)	PL1010 Galvanized Steel & Rubber Roller	—
12" (30.48 cm)	PL1012 Galvanized Steel & Rubber Roller	—
14" (35.56 cm)	PL1014 Galvanized Steel & Rubber Roller	—
16" (40.64 cm)	PL1016 Galvanized Steel & Rubber Roller	—
18" (45.72 cm)	PL1018 Galvanized Steel & Rubber Roller	—
Guardrail -		
26" (66.04 cm) (1000 Series)	GR1026 Aluminum	(2) Accessory Connectors AC1000 & hardware included
41" (104.14 cm) (1000 Series)	GR1041 Aluminum	(2) Accessory Connectors AC1000 & hardware included
56" (142.24 cm) (1000 Series)	GR1056 Aluminum	(2) Accessory Connectors AC1000 & hardware included
44" (111.76 cm) (2000 Series)	GR2044 Steel Powder Coated	(2) Accessory Connectors AC2000 & hardware included
67" (170.18 cm) (2000 Series)	GR2067 Steel Powder Coated	(2) Accessory Connectors AC2000 & hardware included
92" (233.68 cm) (2000 Series)	GR2092 Steel Powder Coated	(2) Accessory Connectors AC2000 & hardware included
Cleat	8C1020 30% Glass Filled Nylon	Withholds avg. of 726 lbs (329.3 kg) when loaded at 2.2"-2.3" (5.6 cm-5.8 cm) from the center

ALL SPECIFICATIONS PROVIDED BY CONNECT-A-DOCK ARE BASED UPON CONNECT-A-DOCK TEST DATA AND ARE PROVIDED WITHOUT REPRESENTATION OR WARRANTY. ACTUAL SPECIFICATIONS, WEIGHTS AND DIMENSIONS MAY VARY FOR A VARIETY OF REASONS, INCLUDING, WITHOUT LIMITATION, DUE TO THE ROTATIONAL MOLDING PROCESS. SPECIFICATIONS SHOULD BE REGRADE AS NOMINAL VALUES ONLY AND NOT AS BINDING.

**Note:** Dock anchoring methods listed in this book are only suggestions. It is up to you to determine which method suits your needs. It is recommended to consult a Connect-A-Dock dealer for your project. Find one near you at [connectadock.com](http://connectadock.com).

**Storage-Winterization:** When storing the Connect-A-Dock outside, the walking surface of the dock needs to face up. If stored upside down, water can get inside the docks through vent holes that allow air expansion. Visit our website to view the full winterization policy.

**Cleaning:** For low maintenance cleaning, use a stiff broom or brush and a garden hose. A pressure washer with no heat can also be used. When using soap, use an environmentally safe product.

**Note:** All plastic has an inherent tendency to create static electricity. If you have a concern, please contact Connect-A-Dock.

**Stainless Steel:** Connect-A-Dock products use marine grade stainless steel for stainless steel metal components. Stainless steel may stain, discolor or attain an adhering layer of grime under normal service, and, especially, when used in salt water conditions. Any contamination of the metal surface by dirt or other material can reduce corrosion protection. Some corrosion can also occur when stainless steel comes in contact with dissimilar metals. The removal of dirt, grime, and surface stains that occur during normal handling and exposure to the elements is essential for optimum corrosion resistance to prevent surface staining (corrosion) or pitting. Dirt, grime and surface stains that occur during normal use and exposure to the elements should be cleaned with warm water with or without a gentle detergent, soap, or ammonia. (Caution, do not use ammonia near anodized aluminum). Persistent stains can be removed with mild, non-scratching, abrasive powders such as typical household cleaners used with warm water and a bristle brush, sponge or clean cloth followed by a rinse with clean water then wiped dry. Stubborn stains can be removed by using a damp cloth and a commercial stainless steel cleaner and polish. Rubbing lightly in the direction of the polish lines on the stainless steel, then rinsing with clean water and wiping dry.

**Installation:** A 1000 or 2000 Series dock should not be placed in areas with constant waves in excess of 12 inches in total wave height, as measured from crest to trough. Please note that placing a dock in an unsuitable location may void any warranty provided by Connect-A-Dock or your local distributor or dealer. If you have any questions regarding the suitability of your particular dock location, please contact your local distributor and/or dealer.

## Installation & Warranties



**Quick and easy installation**



**Assembly only takes a few hours**



**You don't have to get in the water**

The Connect-A-Dock floating dock modules are easy to connect to each other using only a few bolts in just minutes. The only tool you need is a 9/16<sup>th</sup>" (16 mm) socket wrench.



### Warranty Information

Connect-A-Dock®

U.S.A. & Canada

10 Year for polyethylene plastic components

3 Year for commercial use of polyethylene plastic components

1 Year for Accessories

8 Year for polyethylene plastic components

1 Year for Accessories

2 Year for commercial use of polyethylene plastic components

Connect-A-Port XL6  
& Connect-A-Port XL5  
YAKport

U.S.A. & Canada

10 Year for polyethylene plastic components

3 Year for commercial use of polyethylene plastic components

1 Year for Accessories

8 Year for polyethylene plastic components

1 Year for Accessories

2 Year for commercial use of polyethylene plastic components

Connect-A-Dock®

International

2 Year for polyethylene plastic components

1 Year for Accessories

1 Year for commercial use of polyethylene plastic components

2 Year for polyethylene plastic components

1 Year for commercial use of polyethylene plastic components

1 Year for Accessories

Connect-A-Port XL6  
& Connect-A-Port XL5  
YAKport

International

Visit [connectadock.com](http://connectadock.com) or contact customer service for full warranty details. The warranty is subject to change at any time at the discretion of the manufacturer.

Low-maintenance, color-molded polyethylene resists oil, gas, UV rays and salt water, and won't rot, peel or splinter like wood. With a slip-resistant surface that sheds both water and the sun's extreme heat.

CONNECT-A-DOCK® Return Policy - U.S.A. & Canada - Any return of Products requires a return material authorization. Upon return of any product, Seller shall inspect such product to determine whether the nonconforming product is covered by Seller's warranty. If the Product is covered by Seller's warranty, Seller will comply. If the non-conformity is not covered by Seller's warranty, Purchaser will pay for Seller's inspection, the repair (if requested) and all shipping to and from Seller's facility. Non-warranty returns are prohibited without Seller's prior written consent. Manufacturer reserves the right to make changes without prior notice.

© 2012-2025 ver.14 Connect-A-Dock® All rights reserved. Connect-A-Dock®, the Connect-A-Dock® logo, Connect-A-Port, Connect-A-Port XL5 & XL6, YAKport®, Dandy Dock, Make a connection to life®, Connect to life are trademarks of Connect-A-Dock® Other products mentioned herein are trademarks of their respective owners.



(865) 224-3922

## Dock Applications

