




HEAVY DUTY RATCHET LEVER HOIST

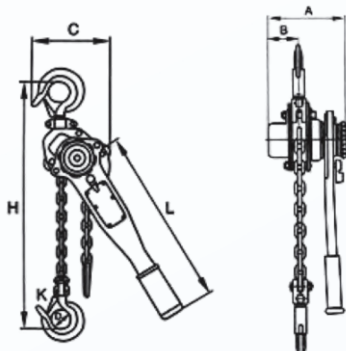

FEATURES / APPLICATION

- The body is made of high-quality high-strength plate stretch casting.
- The block is light and compact, easy to carry, and solves the problem of narrow space and inconvenient operation.
- The internal gear transmission parts are made of 20CrMnTi alloy steel and strict carburizing heat treatment process, which increases the wear resistance of the gears compared with the traditional process.
- The hook is made of high-strength alloy steel with forging heat treatment, which is more strength.
- Equipped with the new non-slip type and more thickness latch, more strength
- Use high strength T8 European standard lifting chain.

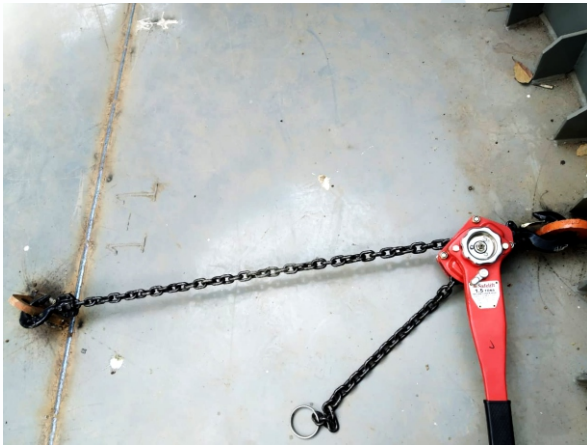

Technical Specifications

Capacity (t)	0.25	0.5	0.75	1	1.5	2	3	6	9
STANDARD LIFT (m)	1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Running test load (KN)	3.75	7.5	11	15	22.5	25	37.5	75	112.5
Effort required to lift rated load (ND)	250	340	145	150	200	220	280	310	320
No of Falls	1	1	1	1	1	1	1	2	3
Dia. of load chain (mm)	4	5	6	6	7.1	8	10	10	10
A	92	105	155	155	165	178	200	200	200
B	72	78	56	56	65	76	83	83	83
C	85	80	130	130	148	152	187	250	335
Dimensions (mm)									
D	30	35	36	36	44	46	48	62	85
H	230	260	27	27	34	36	38	48	55
L	160	300	300	300	350	350	400	550	700
K	25	25	255	255	365	365	365	365	365
Net Weight (Kg) 1m (Kg)	1.8	4	7	7	10	12	18	28.5	45
Extra weight per metre of extra lift	0.41	0.52	0.8	0.8	1.1	1.4	2.2	4.4	6.6

OPTIONAL :

- Overload limiter.
- Rustproof load & Hand chain
- Low Head Room Chain Block with Trolley

