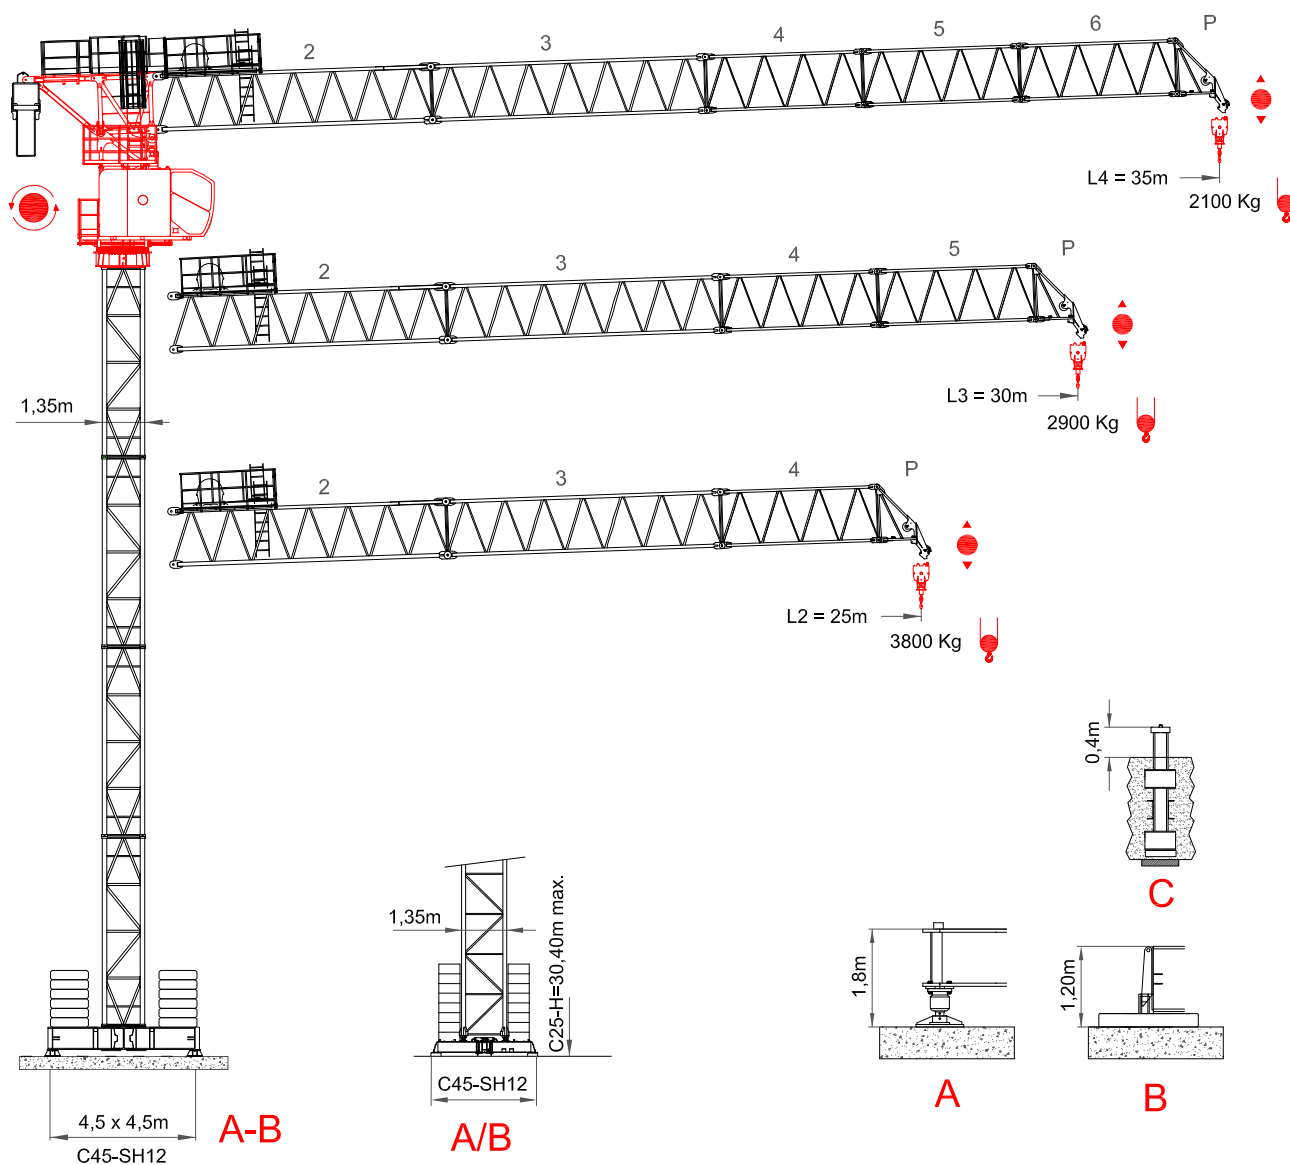
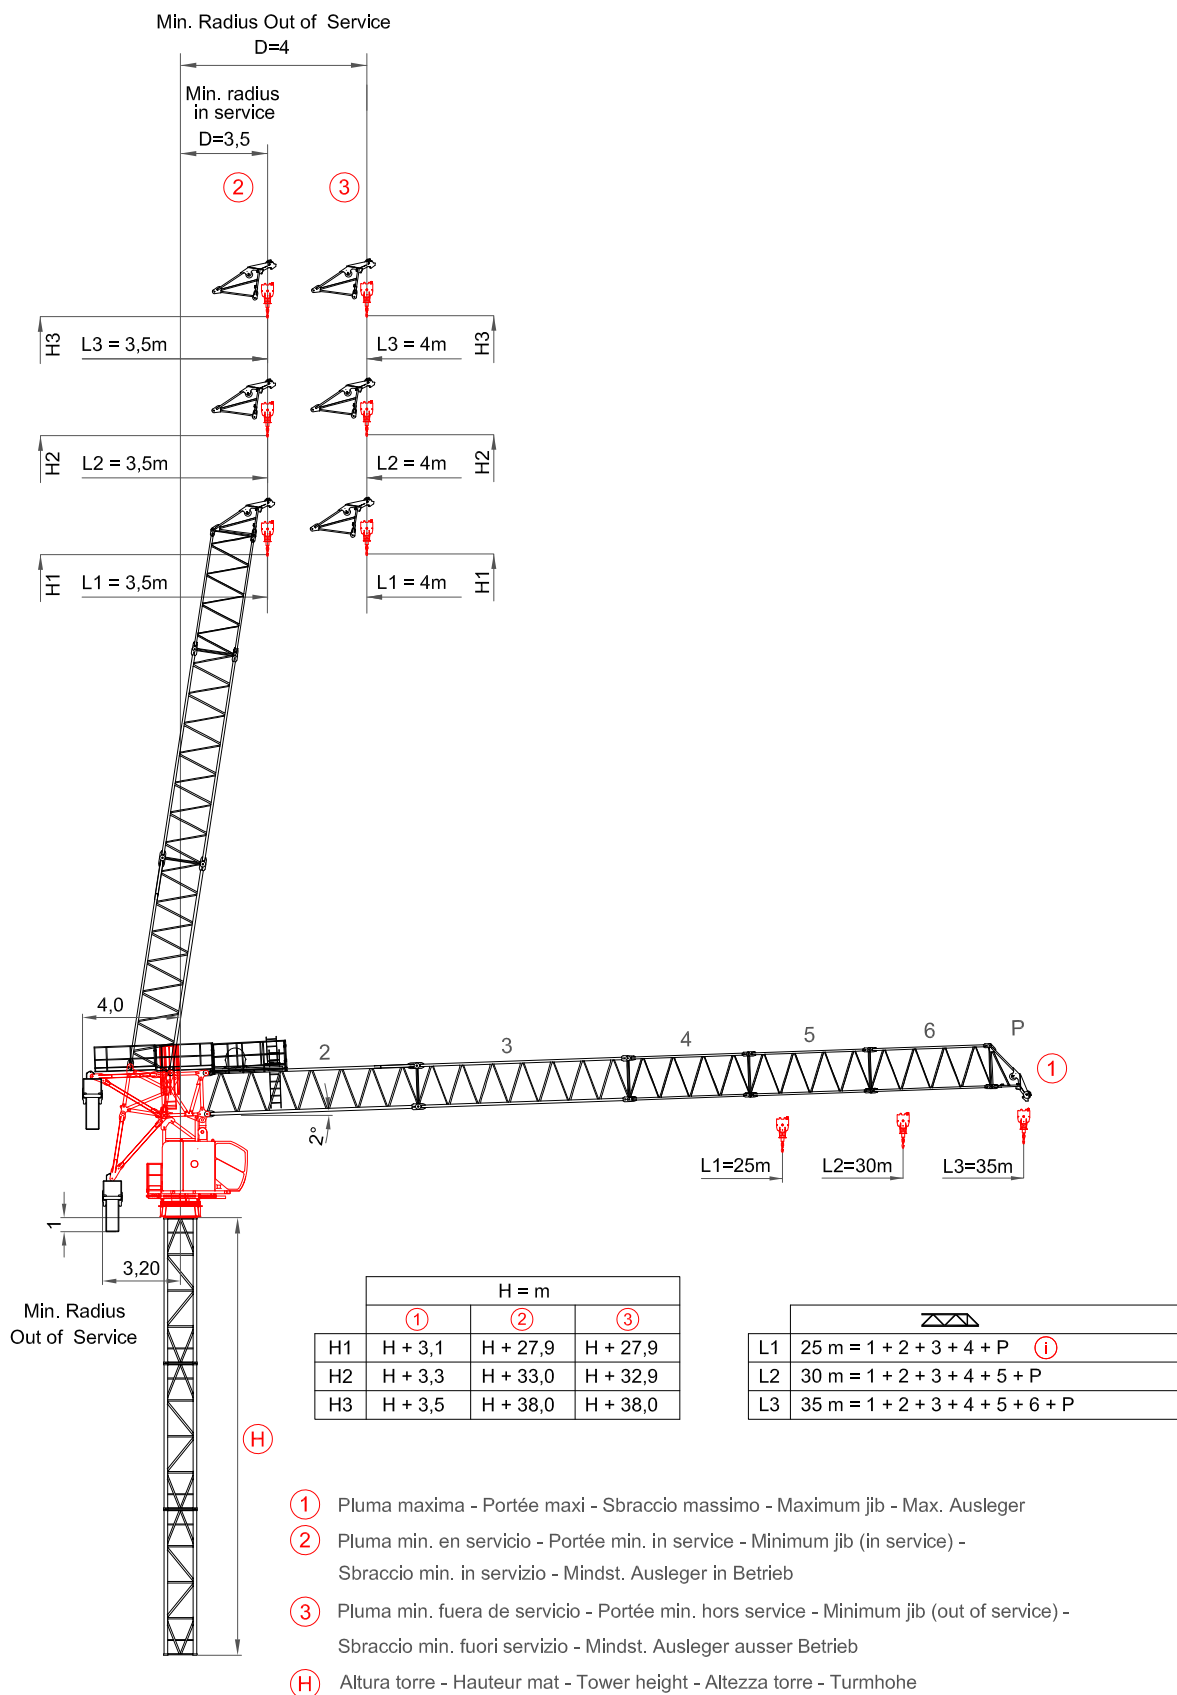




i Consultarnos - Consultateci - Consult us - Nous consulter - Auf anfrage -
СОВЕТОВАТЬСЯ



Curvas de cargas - Load diagrams - Lastkurven - Courbes de charges - Curve di carico - График грузоподъёмности

35 m



10	15	19,5	20,1	24,8	30,5	35	m
4000	4000	4000	3870	3080	2460	2100	Kg 

30 m



5	10	15	22,4	25,4	30	m
4000	4000	4000	4000	3480	2900	Kg 

25 m



5	10	20	24	25	m
4000	4000	4000	4000	3800	Kg 

Mecanismos - Mechanisms - Antriebe - Mécanismes - Meccanismi - Приводы

33 Hp (24Kw) INV						
		D-Max 700m  H. 350m Ø12				
	m/min	0 — 5	0 — 32	0 — 43,5	0 — 62,5	0 — 79
	Kg	4000	4000	2800	1800	1200
	Kw	24	24	24	24	24

			
		2 min. de 2° a 85° 2 minutes from 2° to 85°	
	r.p.m	0 — 0,75	
	Kw	1 x 7,5	
	m/min	12 — 24	
	Kw	4 x 3	


- * Opcional / Optional / Opzionale
-  Elevación / Hoisting / Heben / Levage / Sollevamento
-  Elevación de pluma / Luffing / Ausleger-Einziehen / Relevage / Brandeggio
-  Orientación / Slewing / Schwenken / Orientation / Rotazione
-  Traslación / Travelling / Schienenfahren / Translation / Traslazione
-  Cable / Rope / Seil / Câble / Fune

33Hp (24Kw) - INV

 2000/14/CEE 2005/88/CEE	 2006/95/CEE	400V 50Hz I _{max} .= 109A Fuse= 125A	TOTAL POWER 71 KVA	GENERATOR 115 KVA	100m 4x35mm ²	150m 4x35mm ²	200m 4x35mm ²
		* 480V 60Hz I _{max} .= 91A Fuse =100A					

FEM 1005-C25 / EN 14439 - Mástil / Reacciones - Masts / Reactions - Maste / Eckdrücke - Mat / Réactions - Torre / Réazioni - Реакции / Комплектация башни

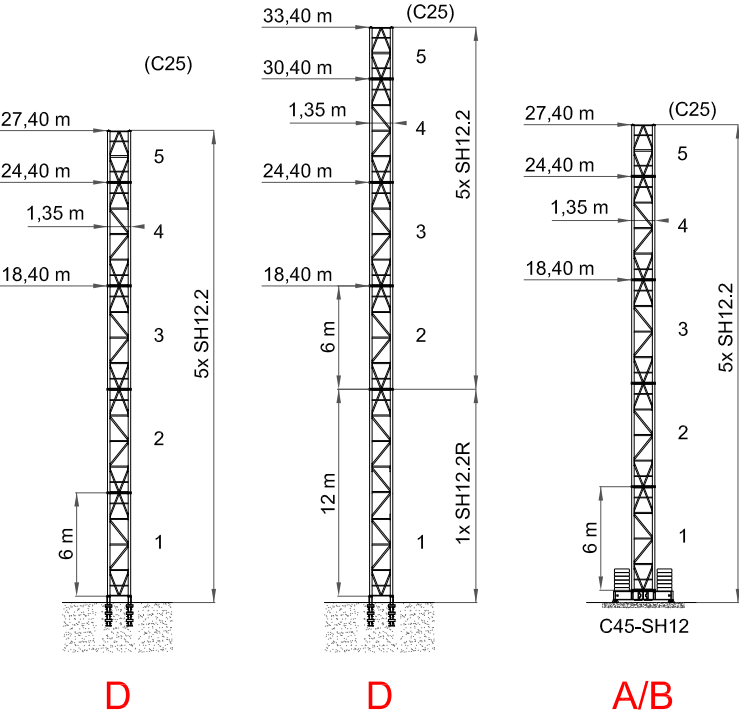SH12.2 = S1448 8/8 M48
SH12.2R = S1448 16/8 M48



	max. H(m)
(m)	FEM 1005 C25
25	27,40
30	27,40
35	24,40

	max. H(m)
(m)	FEM 1005 C25
25	33,40
30	30,40
35	30,40


	max. H(m)
(m)	FEM 1005 C25
25	27,40
30	27,40
35	24,40

Proceso de montaje - Assembling – Zusammensetzung - Montage- Montaggio - монтаж

1st STEP OPTION A

TURNTABLE
CABIN SUPPORT
HYDR. UNIT SUPPORT


6880 Kg



2nd STEP OPTION A

TOWER TOP SECTION
JIB SECTION 1


5020 Kg



1st & 2nd STEP OPTION B

TURNTABLE
TOWER TOP SECTION
CABIN SUPPORT
JIB SECTION 1


11900 Kg



3rd STEP

COUNTER-JIB + BALLAST BASKET


2060 Kg



4th STEP


1 x CENTRAL COUNTER-JIB BALLAST

4200 Kg



5th STEP

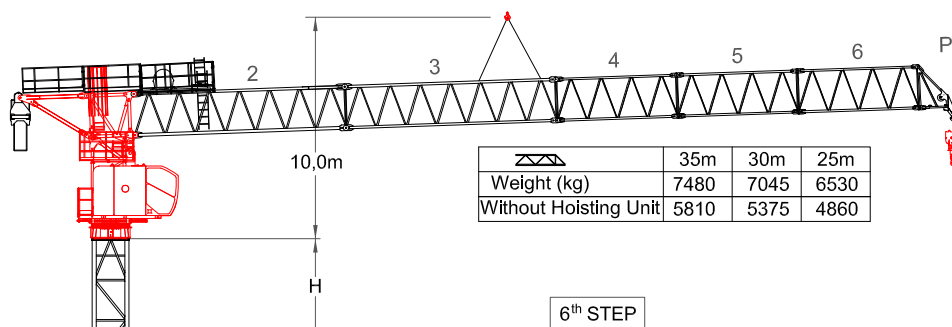JIB SECTIONS 2, 3, 4, 5 & 6
JIB END
HOISTING UNIT = 1670Kgs
HOOK




	35m	30m	25m
Weight (kg)	7480	7045	6530
Without Hoisting Unit	5810	5375	4860








6th STEP
















2 x COUNTER-JIB BALLASTS






2 x 6000 Kg



Dimensiones y transporte - dimensions and transport - Abmessungen und Transport - dimensions et des transports - dimensioni e trasporti - Размеры и транспорта

	L(m)	W(m)	H(m)	Peso(Kg)
Pluma tramo primero / Jib heel section / Ausleger-Anlenkstück / Pied de fleche / Settore articolato di braccio / Корневая секция стрелы 	2,23	1,2	2,21	1750
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück / Élément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	8,96	1,2	2,04	2650
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück / Élément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	8,96	1,2	2,04	1370
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück / Élément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	5,20	1,1	1,70	555
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück / Élément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	5,20	1,1	1,70	515
Elemento intermedio de pluma / Intermediate jib section / Ausleger-Zwischenstück / Élément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	5,20	1,1	1,70	435
Elemento final de pluma / Intermediate jib section / Ausleger-Zwischenstück / Élément interm. de fleche / Spezzone di braccio / Промежуточная секция стрелы 	1,74	1,12	2,43	285
Equipo de elevacion / Hoist winch / Heben / Levage / Sollevamento / подъёмник 	0,93	1,96	0,88	1670

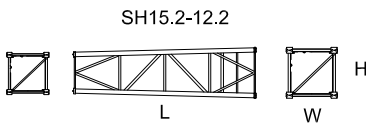	L(m)	W(m)	H(m)	Peso(Kg)	
Contrapluma / Counter-jib / Gegenausleger / Contre-fleche / Controbraccio					
	2,32	1,14	1,8	1045	
	3,70	0,9	1,5	1015	
Unidad de rotacion / Complete slewing unit / Drehbühne / Orientation / Rotazione					
	2,25	1,34	5,1	5020	
	1,58	1,74	1,22	3500	
	2,25	1,74	6,10	8520	
Gancho / Hook / Lasthaken / Crochet / Gancio					
	0,5	0,25	1,45	170	
Bloque de contrapeso / Counterweight blocks / Gegengewichtsblöcke / Bloc de contrepoids / Blocco di contrappeso					
	Ⓐ	1,1	0,83	2,3	6000
	Ⓑ	0,75	0,83	2,3	4200
Elemento de torre / Tower section / Turmstück / Élément de mât / Elemento di torre					
	SH12.2	6	1,36	1,39	2230
	SH15.2	12	1,36	1,39	4700
	SH15.2-12.2	6	1,66	1,69	2400
	SH15.2R	12	1,66	1,69	5040
Elemento de empotre / Foundation anchor / Fundamentanker / Pieds de scellement / El annegare					
	SH12.2/8	1,36	1,37	1,6	540
	SH12.2R/16	1,36	1,37	1,6	600
	SH15.2/8	1,66	1,67	1,6	580
	SH15.2R/16	1,66	1,67	1,6	640

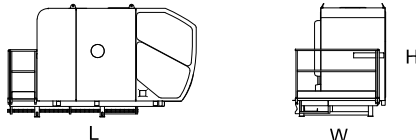
	L(m)	W(m)	H(m)	Peso(Kg)
Cabina y soporte / Cabin and platform / Kabine und wartungs / Cabine et support / Cabina e supporto 	4,27	2,05	2,56	2290
Central hidráulica y soporte / Hydraulic power pack and platform / central et support / Cabina e supporto 	3,10	1,47	1,40	1090
Base Cruciforme C45-SH12 / Crossbase C45-SH12 / Fundamentkreuz C45-SH12 / Châsis C45-SH12 / Carro base C45-SH12 	6,7	1,3	0,77	6190
Bloque apoyo de base / Base support block / Grundballastblöcke / Bloc de appui de base / Blocco di appoggio alla base 	2	0,5	2	5000
Bloque lastre de base / Base ballast block / Grundballastblöcke / Bloc de lest de base / Blocco di zavorra alla base 	4,5 5,8	0,51 0,4	0,9 1,5	5000 8000
Niveladores / Levellers / Spindel pyramide / Niveleurs / Piedi regolabile  (x4)	1,20	1,20	0,65	250




40" HC x 5 - HBG 24 m



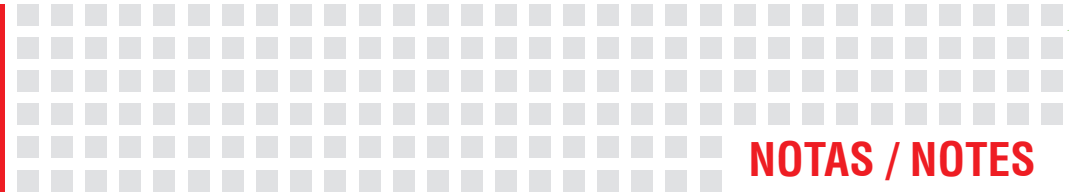
x 4 - HBG 24 m



NOTAS / NOTES

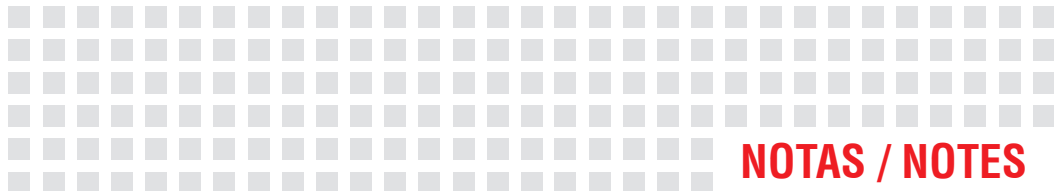

NOTAS / NOTES

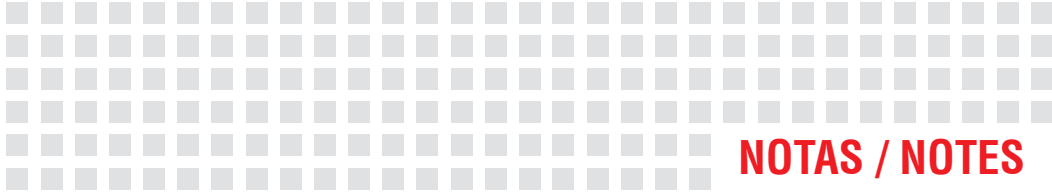

NOTAS / NOTES

Lined area for notes, consisting of multiple horizontal lines.