

# NAPOLEON



[napoleon.com](http://napoleon.com)

## 9500 SERIES

NEW AND IMPROVED!  
AFUE COMPLIANT, REDUCED NOISE AND MORE...



# 9500 SERIES

Napoleon is proud to launch the new 9500 Series gas furnace. Meeting FER standards, boasting modular components it's a reliable furnace built to last.

**10 YEAR PARTS LIMITED WARRANTY**

**LIFE TIME HEAT EXCHANGER LIMITED WARRANTY**


**10 YEAR UNIT REPLACEMENT HEAT EXCHANGER LIMITED WARRANTY**

\*See warranty for details

## FEATURES:

- Natural Gas, Propane Convertible
- Can be used for new construction heat
- Flexfit - Upflow, downflow, horizontal left and right
- High efficiency ECM Constant Torque Blower Motor
- T140 Aluminized Vortex™ Turbulator Heat Exchanger
- 29-4C Stainless Steel Heat Recovery Coil
- Aluminized Multi-Port In-Shot Burners
- Self Diagnostic Integrated Furnace Control
- Upgraded premium Kyocera igniter – coming soon
- Moved igniter between the 1st and 2nd burner for increased igniter life – coming soon
- Quick service mount bracket for igniter – coming soon
- Exhaust support bracket to eliminate load on inducer
- 4 bolt mount for inducer fan
- Upgrade condensate drain system – increased flow rate
- New gasket for inducer choke with double the sealing

## Modular heat exchanger and blower for easy servicing.

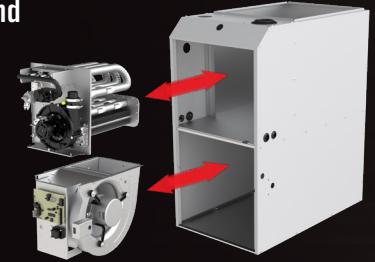

- Upsize to 34", Larger blower by 1"
- Improved air flow with quieter operation
- Circuit board changed back to vertical mount
- New blower stop plate to ensure correct position of blower
- Fix mount for pressure switch to cabinet instead of inducer
- Mount trap on outside of furnace for easy cleaning
- Pre-installed drain hoses

HEATING CAPACITIES	WPX040S2AA-N	WPX060S3AA-N	WPX080S3AA-N
Efficiency (AFUE)	95%	95%	95%
Input BTU/hr	40,000	60,000	80,000
Output BTU/hr	38,000	57,000	76,000
CABINET DIMENSIONS (IN)	WPX040S2AA-N	WPX060S3AA-N	WPX080S3AA-N
Width (in)	17 1/2	17 1/2	17 1/2
Depth (in)	29 1/2	29 1/2	29 1/2
Height (in)	34	34	34
VENTING*	WPX040S2AA-N	WPX060S3AA-N	WPX080S3AA-N
Clearances to Combustibles	0	0	0
Minimum Vent Size (in)	1 1/2	1 1/2	2
Maximum Vent Size (in)	2 1/2	3	3
Minimum Vent Length (ft)	15	15	15
Maximum Vent Length (ft)	75	100	100
AIRFLOW AND COOLING	WPX040S2AA-N	WPX060S3AA-N	WPX080S3AA-N
Motor and Size	1/3 hp	1/2 hp	1/2 hp
AC Tonnages	1 1/2, 2, 2 1/2	2, 2 1/2, 3	2, 2 1/2, 3

WPX030S2AA-N	WPX100S5BA-N
95%	95%
30,000	100,000
29,000	95,000
WPX030S2AA-N	WPX100S5BA-N
17 1/2	22 1/2
29 1/2	29 1/2
34	34
WPX030S2AA-N	WPX100S5BA-N
0	0
1 1/2	2
3	3
15	15
100	100
WPX030S2AA-N	WPX100S5BA-N
1/3 hp	1 hp
2, 2 1/2, 3	2, 3, 4, 5

PENDING CERTIFICATION

Canada High Altitude: All units certified to 0-4500' US High Altitude: All units certified to 0-5400'

All specifications and designs can change without notice to allow for on-going product improvement. Images may not be exactly as shown. Consult your owners manual for current information. Check all local and national building codes and gas regulations. Napoleon® is a registered trademark of Wolf Steel Group Inc.



24 Napoleon Road, Barrie, Ontario, Canada L4M 0G8  
 103 Miller Drive, Crittenden, Kentucky, USA 41030  
 7200 Trans Canada Highway, Montreal, Quebec, Canada H4T 1A3

Tel: 866-820-8686  
 napoleon.com

