

MINERAL FIBRE CEILING TILES

FACE PATTERN : TEGA

FEATURES & BENEFITS

- Fully Demountable
- Mineral Fibre
- Economical
- Acoustical, great sound absorption
- White finish with a non directional

APPLICATION

- Commercial or residential
- Restaurants
- Cafeterias
- Bars
- Retail
- Offices
- Receptions

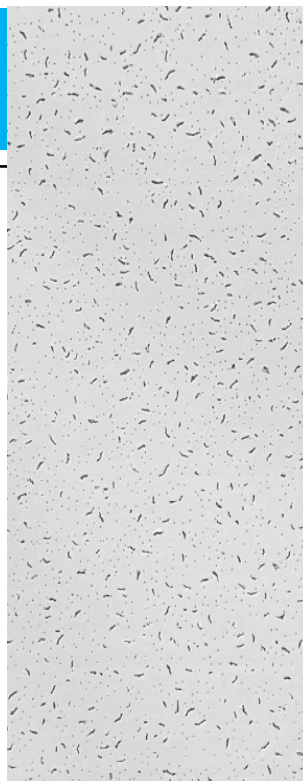



TABLE OF PERFORMANCE



Edge Detail	Item	Size (mm)	Tiles / Box	Area / Box	Surface Colour	Light Reflectivity	NRC	Max RH
								
SQUARE EDGE	CDSBRF21	595*595*12	10	3.60m ²	WHITE	0.85	0.55	90%
SQUARE EDGE	CDSBRF24	1195*595*12	8	5.76m ²	WHITE	0.85	0.55	90%

SPECIFICATION DETAILS

- CE Marking
- BS EN 13964:2004
- BS EN 143501-1:2007
- Surface Colour : White
- Face Pattern—Tega, Non Directional Fissured pattern
- Thickness 12mm Deep
- Humidity Resistance : 90%
- Weight: Per Tile 12mm deep: 1.10kg - 595x595mm, 2.20kg – 1195x595mm
- Recycled Content : 63%
- Made in China

Ingredients : High quality mineral wool 38%, perlite powder 35%, newspaper 18%, duplex fiber 4%, ethylene 2%, damp-proofing admixture 3%

Health & Safety : Additional health and safety guidance when handling tiles. Dust may cause irritation to eyes, skin and mouth. Cut tiles with a utility knife to minimize dust. Wear eye, skin and respiratory protection if necessary. Do not swallow. If irritation persists, seek medical advice.

Waste Materials : Waste materials are to be disposed of in accordance with the UK Environmental waste guidelines for disposal of mineral fibre

Materials

CE / UKCA : CE / UKCA Marked

Fire : Reaction to fire classification **B-s1,d0**

TEST REPORTS : Test reports are provided by our manufacturers, if you need to ensure that the product or the certification on test results meet your requirements and building regulations then we can provide copies for you to submit for approval. These data sheets are to be used as a guide only, all testing and data sheets are provided by the manufacturer and no testing is carried out by ourselves.