


MOLDED FLANGE ADAPTERS

SDR11 - 200PSI/SDR17 - 125PSI

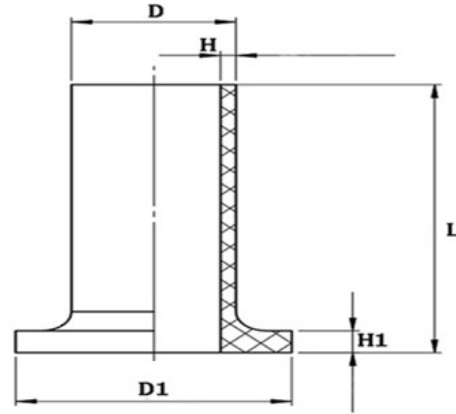

Size (IN)	D	D1	L	H1 SDR11	H1 SDR17	H SDR11	H SDR17	Weight (KG) SDR11/SDR17	Part Number
2"	2.375"	3.937"	5.71"	.55"	.55"	.216"	.140"	0.2/0.17	MFA02**
3"	3.5"	5"	6"	.67"	.67"	.318"	.206"	0.4/0.33	MFA03**
4"	4.5"	6"	6.81"	.79"	.79"	.409"	.265"	0.65/0.585	MFA04**
6"	6.625"	8.50"	8"	.80"	.80"	.602"	.390"	1.64/1.4	MFA06**
8"	8.625"	10.63"	9"	1.02"	1.02"	.784"	.507"	3.58/2.77	MFA08**
10"	10.75"	12.75"	10"	1.28"	1.28"	.977"	.632"	5.06/4.63	MFA010**
12"	12.75"	14.96"	10.75"	1.54"	1.54"	1.159"	.750"	8.5/6.54	MFA012**
14"	14"	17.50"	12"	1.62"	1.54"	1.273"	.824"	11.2/8.25	MFA014**
16"	16"	20"	12"	1.81"	1.54"	1.455"	.941"	15/11.8	MFA016**
18"	18"	21.12"	12"	2.05"	1.73"	1.636"	1.059"	19.5/13.9	MFA018**
20"	20"	23.50"	12"	2.28"	1.89"	1.818"	1.176"	24.5/17.7	MFA020**
24"	24"	28"	14"	2.72"	2.72"	2.000"	1.412"	41/30	MFA024**
26"	26"	29.75"	14"	3.15"	3.21"	2.364"	1.529"	49/35.60	MFA026**
28"	28"	32.30"	14"	3.21"	3.21"	2.545"	1.647"	55.6/40.6	MFA028**
30"	30"	34.30"	14"	3.40"	3.35"	2.727"	1.765"	64.5/46.6	MFA030**
32"	32"	36.50"	14"	3.40"	3.46"	2.909"	1.882"	72.7/53.6	MFA032**
36"	36"	40.80"	14"	4.10"	3.58"	3.273"	2.118"	97/69	MFA036**
42"	42"	47.10"	21"	5.00"	3.58"	3.818"	2.471"	186.91/123.89	MFA042**
48"	48"	53.50"	21"	5.50"	3.63"	4.36"	2.824"	245.25/163.87	MFA048**
54"	54"	59.60"	21"	6.13"	4.00"	4.91"	3.176"	310.77/207.33	MFA054**
63"	63"	66.79"	21"	7.16"	4.63"	5.727"	3.706"	399.75/266.71	MFA063**

(Insert SDR for **)

- Material PE100/PE4710, manufactured to exceed PE100, PE3608, PE4710 Resin Specification.
- AWWA C906-15 and ASTM-D2513, D-3261, F2880, F1055, D3035, D3350.
- ISO9001 and CSA, CE, NSF, BV, SGS, and CNAS approval/certification.
- Pipe dimensions are in accordance with ASTM F714 and AWWA C901/906
- Molded up to 24", 26-63" Manufactured from bar stock.
- Available in DIPS & metric sizing upon special request.*

