



FIRED UP KILNS

and pottery supplies



Owner's Manual

Fired Up Top Loading Range (13, 30 & 70)

Last Update: February 2026

Congratulations and thank you for purchasing a Fired Up Kiln.

Our kilns are built from the highest quality materials by expert craftsmen to ensure you have many years of trouble-free operation.

Read this manual carefully before using your kiln. This manual provides instructions on how to safely locate your kiln, as well as instructions for its safe use.

If you have any questions after reading this manual, please contact us.

Contents:	Page Number:
Special notes	3
Locating your kiln	4
Health and safety	5
Electrical connections	6
Safety switch	7
The firing chamber	7
Elements	8
Thermocouple	10
Pyrometric cones	11
Kiln controller	12
Loading your kiln	13
Empty Firing for 1 st Use	14
Loading and Firing Bisque ware (920°C -1060°C)	14
Loading and firing Earthenware (1040°C -1080°C)	15
Loading and firing Mid-fire – Stoneware (1220°C -1280°C)	15
Cooling the kiln	15
Maintenance	16
Pinning Elements	17
Kiln Furniture	18
Trouble Shooting	19
Disclaimer	20
Kiln Firing Log	21
Orton Pyrometric Cones Chart	22
Notes	23

Special Notes



Please take special note of the following:

- Ensure you read this manual and the controller manual before operating your kiln.
- When locating your kiln, a space of 30 cm should be left free around the outside of your kiln.
- Do not exceed 1300°C in your kiln. Doing so may lead to severe damage not covered under warranty. To extend element life, avoid exceeding 1260°C.
- Preferably place your kiln on a concrete floor or on a floor with ceramic or concrete tiles.
- The kiln must always be closed with the lid latched.
- Never leave a firing kiln unattended, there are multiple uncontrollable factors that can cause a kiln to overfire, your vigilance is the only reliable prevention.
- Ensure that there is adequate ventilation in the room where the kiln is located.
- The kiln should only be accessible and used by responsible and authorized persons.
- Don't let ware touch the thermocouple or elements as this may lead to disastrous over firing.
- Use pyrometric cones, they provide invaluable information, particularly when glaze firing.
- Do not use an extension cord with your kiln.
- Damaged power cords should only be replaced by your supplier or by a qualified electrician
- Never alter or interfere with your kiln's electrical connections, there is the risk of electrocution.
- Gaps between bricks, hairline cracks and browning are normal signs in a kiln due to repeated expansion and contraction, they are cosmetic and do not impact function.
- Discolouration of the kiln casing is expected and related to venting gases and ventilation dependant.
- Do not open the kiln until the end of the program, or at a safe temperature (50°C or less).
- Do not put anything on the lid of your kiln, nor lean anything against your kiln.
- Be careful when working near an operating kiln as the case and kiln lid may get hot during firing and can cause injury!
- Ensure children and pets are kept away from a firing kiln.
- Treat your kiln with care and make sure element channels are clear of debris before firing. Using a vacuum cleaner is best to avoid touching the elements.
- Have a read of our '[New to owning a kiln](#)' page.
- Have fun & contact us if you have any questions or queries. We are always happy to help.

Locating your kiln

The location of your kiln is important and there are certain precautions that must be observed when choosing a suitable position for your kiln. Accessibility and safety are primary considerations.

- Select a dry, well-ventilated area that has good access to allow for easy loading and unloading. Ensure that the kiln is placed on a flat, heat-resistance, solid surface that allows air circulation beneath and around the kiln. For example, covered with linoleum, parquet or laminate, it is advisable to first cover it with tiles or cement sheets. This prevents any discolouration of the floor.
- Level the kiln as much as possible. Make sure that there is a minimum of 300mm around the kiln and at least 1000mm of clearance above the kiln when positioning the frame; make sure the space around the kiln is free, to allow for the radiation of heat. Make sure that the kiln is stable and level.
- The room must be able to ventilate sufficiently during firing to get rid of any fumes. Firing in a room where work is being done at the same time is only recommended if the room is large enough, can be well ventilated and if it is not possible to get too close to the kiln when switched on.
- Position the kiln with the controller in easy reach.
- The space where the kiln will be placed must be large enough for you to work in front of it. Ensure that no inflammable materials and or objects are present in the vicinity of the kiln.
- Ensure all combustible and flammable materials such as curtains, plastic, paper etc. are nowhere near the kiln.
- Do not rest anything against the kiln or place objects under or on top of the kiln. Do not place cupboards and/or racks close to the kiln. This also applies to any cupboards or shelves above the kiln.
- The kiln is not a toy, make sure it is in a secured location, even when not in use.
- Keep children & pets well away from the kiln.
- If you are positioning your kiln in an outdoor area, such as a verandah, outdoor shed, or carport, ensure it is always shielded from rain. A heavy-duty BBQ cover placed over the kiln when not in use is a good idea. It is vital that the kiln is not exposed to water. This will damage the electrics, cause tripping of your safety switch and can lead to brick damage, as the kiln bricks will absorb moisture and crack on firing.
- As the bricks are hydrophilic (absorb moisture) it is a good idea if you are not using your kiln for prolonged periods to fire it to 200°C and soak it for 2 hours every 2-3 weeks to ensure any moisture that has built up over time is driven off.

NOTE: *During use, the kiln must always be level & stable*

Health & Safety

Kilns use a considerable amount of electrical current and generate significant heat when operating. As a result, please ensure you operate your kiln with due care and attention.

- Always use appropriate protective clothing when operating or working with heat and near the kiln. The outside of the kiln will be hot when the kiln is operating so treat the kiln with caution.
- Avoid looking into the kiln without protective eyewear when the temperature exceeds 1000°C and **NEVER** put your hand or face within 500mm of the vent when the kiln is operating.
- Your kiln uses high voltage, and the control box has been labelled with a warning notice to advise you of this. Only suitably qualified electricians should access the control box.
- Please ensure you read both this manual and the controller manual before operating the kiln. Please contact us if you have any questions or queries.
- Do not attempt any repair work on the kiln.
- It is essential that you don't leave a kiln that is operating unattended. Any equipment has the potential to malfunction or be affected by power surges etc. The operator is responsible for monitoring, adjusting, and maintaining the kiln and controls.
- A malfunction that goes undetected can result in overfiring, causing extensive damage to your kiln. Your warranty does not cover the effects of overfiring regardless of the cause.
- All our kilns are fitted with an automatic safety cut off switch. The switch works by shutting off power to the elements if the lid is opened, to prevent potential electrical shocks when the kiln is opened whilst the power is on. **NEVER** attempt to bypass this switch. We recommend that you only open the lid/door after turning off the power and unplugging the kiln.



Electrical Connections

The following electrical considerations apply to our kilns;

- Ensure that any electrical connections are performed by a qualified electrician. **NEVER** attempt to perform this yourself. There is a considerable risk of electrocution. It is critically important that your kiln is connected to power in full compliance with all your local electrical regulations.
- **NEVER** attempt to alter the kiln wiring, electrical circuits, or controller wiring. Doing so will void the warranty.
- **NEVER** use an extension cord to run your kiln. If your kiln cord is not long enough, relocate the kiln or the electrical outlet.



Lid Safety Switch

The kiln is equipped with a safety switch to interrupt the power when the kiln's lid is opened.

- To prevent malfunction of this safety switch, it is important to place the lid on the kiln correctly. Make sure that you always lift a lid vertically, and don't twist it to the side.
- Ensure that the kiln lid is latched when in use. The heat will make everything expand and if not securely latched, it may make the lid move slightly and cause the limit switch in the lid to cut power to the kiln.

NOTE: Never place anything between the lid and the body of the kiln to accelerate cooling.

The Firing Chamber

The interior of your kiln is constructed using light weight insulating firebricks. They have been selected for their quality as well as their excellent insulating properties. They are a very porous and filled with air pockets. It is these numerous air pockets that make the bricks light and allow for their excellent insulating capabilities.

- Kiln bricks are fragile in nature and should be handled with great care.
 - After a few firings, you may notice hairline cracks in some of the bricks. These are simply expansion cracks and in no way affect the functioning of the kiln.
 - We use pins (rather than mortar) in construction to prevent brick fracture, pins allow for brick expansion and movement during firing and helps prevent large brick fractures. When cool, you may notice small gaps (2mm) between bricks, this is normal and does not effect function.
 - Every time you fire your kiln it will expand by approx. 1 -2%, therefore some movement of the bricks is inevitable during this 'kiln breathing'. As a result, it is normal for cracks to appear in the bricks. These cracks are essentially expansion joints, and they do not affect the functioning of your kiln. Regular firing at more than 1280°C will increase the chance of cracks.
- It is important that you take care when loading and unloading your kiln so as not to bump the bricks with kiln furniture. **ALWAYS** close the kiln lid gently.
- The lid can be adjusted to tighten/loosen the lid seal.
- **NEVER** open the kiln when the interior temperature is greater than 200°C. Doing so may cause thermal shock to the bricks and shearing of the surface as well as injury to you.
- During the firing process, the lid may warp, this is due to tension. As a result, you will see an orange glow between the lid and the kiln body. After cooling down, the lid will flatten again. This has no adverse functional consequences.
- This kiln **IS NOT** suitable for raku.

Elements

Your kiln is fitted with high quality elements. These elements are fitted into element grooves in the bricks and pinned in place to prevent contraction, collapse and intrusion into the firing chamber.

- Kiln elements are always subject to wear and tear.
- Their lifespan depends, among other things, on how often you fire, at what temperature, the space where the kiln is located, what kind of work you are firing, etc. Always ensure that you keep the kiln grooves clean. Contamination can be removed from the grooves with a vacuum cleaner or with a brush.
- Over time kiln elements become brittle, as a result, they can fracture if knocked whilst packing/unpacking the kiln.
- When you first turn the kiln on, you may notice a “hum” for a short time. This is normal as the elements begin to heat up.
- Element lifespan is directly related to the temperature that you are firing to. The higher the firing temperature, the shorter the lifespan. You may expect 350 firings from a set of elements to 1050°C but only 100 firings when firing to 1280°C. Our kilns have a maximum firing temperature of 1300°C, however we advise to not exceed 1260°C to maximise element lifespan.
- The manufacturer of Kanthal A1 wire provides the following as a guide to illustrate the effects of operating temperature.

Element Temp °C	Kiln Temperature °C	Proportional Life %
1150	1120	100
1200	1170	46
1260	1230	22
1315	1285	12

- Element lifespan is significantly shortened if kiln wash, glaze or other contaminants encounter the element. As such always place ware 40mm from the elements and ensure that all element channels are vacuumed out prior to each firing. Use a soft vacuum attachment when vacuuming inside the kiln to prevent damage to the firebrick. Avoid touching the elements with the vacuum head as cold elements are brittle and can break easily.
- If your kiln is failing to reach temperature, it is likely that you have either a failed or compromised element.
- The kiln's controller switches the oven on and off continuously during firing to achieve the required temperature rise at the rate you have selected. You may therefore hear the kiln clicking on and off at differing intervals throughout the firing.

- With continued use, you will find that the elements will start to move in their channels, sometimes they may even pop out. It is important not to attempt to replace them without first heating the element material to at least 350°C -400°C. Attempting to replace a cold element will cause it to break as it becomes brittle with use. By heating the element, using a blow torch it will become pliable and may be replaced and repinned back in its groove.
- It's time to change your elements when they collapse, bunch up in the groove, show signs of pitting, or your firings are progressively slowing down due to a loss of power in the elements.
- We carry replacement elements for all our kilns, which can be replaced by a registered electrician or kiln technician.
- An electric kiln is not suitable for salt glaze firing or reduction.



Thermocouple

The thermocouple measures the temperature in the kiln and feeds this information to the controller.

- Your kiln is fitted with an S-type thermocouple. S-type thermocouples are suited to continual high temperature use and should not require replacing unless broken by impact with a kiln shelf etc.
- Below 30°C, S-type thermocouples can be inaccurate by up 10°C, however at 1280°C the variance is less than 3°C.
- A thermocouple consists of two different metal wires – platinum/rhodium in the case of R-type. These metal wires are joined at the end to form a junction that is in the kiln. The voltage difference between the two metals is measured and converted to a temperature reading on your controller. These wires are usually shielded in a complete sheath. A thermocouple will only sense the temperature in the immediate vicinity of the junction.
- To read the temperature in the kiln accurately, it is important that the thermocouple protrudes about 30-40mm into the kiln chamber. Be careful when loading the kiln that you do not push the thermocouple into the kiln wall or place any ware within 30mm of the thermocouple. This will lead to the controller registering a lower temperature than the actual kiln temperature and can lead to over-firing that can damage the kiln beyond repair.



Example of an S-Type Thermocouple




Thermocouple

Pyrometric Cones

Thermocouples measure temperature only in the immediate vicinity of the junction. Pyrometric cones measure “heat work” – this is a measure of time and temperature.


- Cones consist of a mixture of carefully controlled ceramic materials that are designed to give a graduated scale of fusing temperatures. The most commonly available cones are manufactured by the Orton company, and they provide a chart that provides the fusing temperature with a corresponding cone number. See our FAQ page for more details and resources.
- Cones are mounted either in a specific refractory cone holder or alternatively embedded in a wad of clay, with each cone placed to the same depth and at an angle of 15° to the vertical. This is assisted by a slant on the base of the cone.
- A series of three cones is standard, the cone placed on the far left indicates 20°C below the required temperature, the middle cone indicates the required temperature and the cone to the right indicates a temperature 20°C above the required temperature. The collapse of the first cone serves as a warning that the required temperature is being reached, whilst the second cone collapse indicates the correct temperature. The third cone, or “guard” cone should remain upright as it serves to warn of potential over firing. The fusion point of any cone is indicated when the tip of the cone touches the base on which the cone is mounted.
- For larger kilns, it is a good idea to place cones in several locations so you can get a feel for the hot and cold spots. Cones also provide a guide as to the accuracy of your thermocouple.
- Every kiln is different, and it may take some time to learn the idiosyncrasies of your kiln!

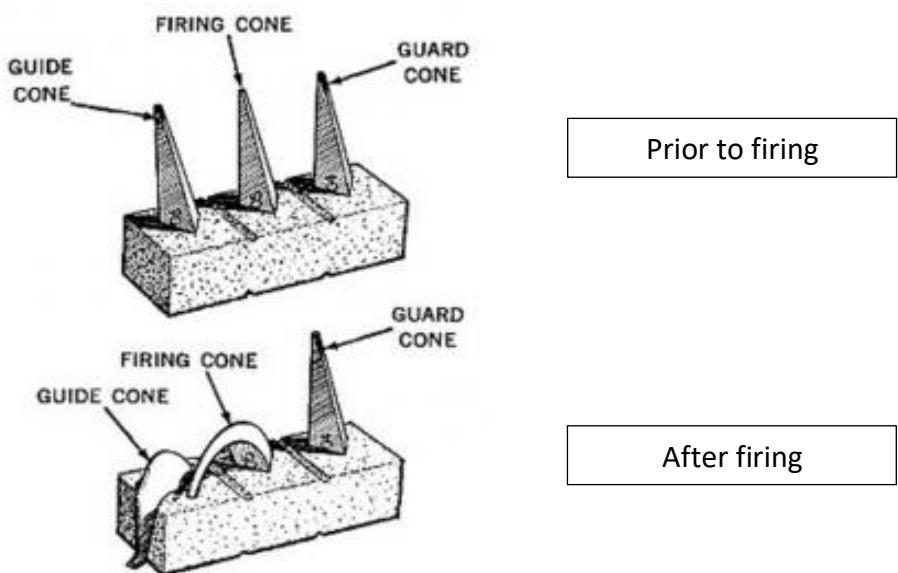

Kiln Controller

The ST315C controller has been specifically designed to offer flexibility, accuracy, and easy management of the process of firing your kiln.

- A display guides you through every stage of the programme cycle. The settings and progress are displayed in a graph format.
- This controller has the facility to hold up to 32 programmes, with each in turn having up to 32 segments.
- Pre-set programmes are loaded into the unit as a guide and can be changed or removed depending on your requirements.
- The ability to program in delays, temperature ramps-ups and downs, including soaks, make your firing schedule much simpler and easy to manage.
- Please refer to the Controller Manual on our resources page for more detailed information.
- If your kiln is stored outdoors (veranda, carport, balcony etc.) we recommend removing the controller when the kiln is not in use and storing it indoors to prevent moisture damage.

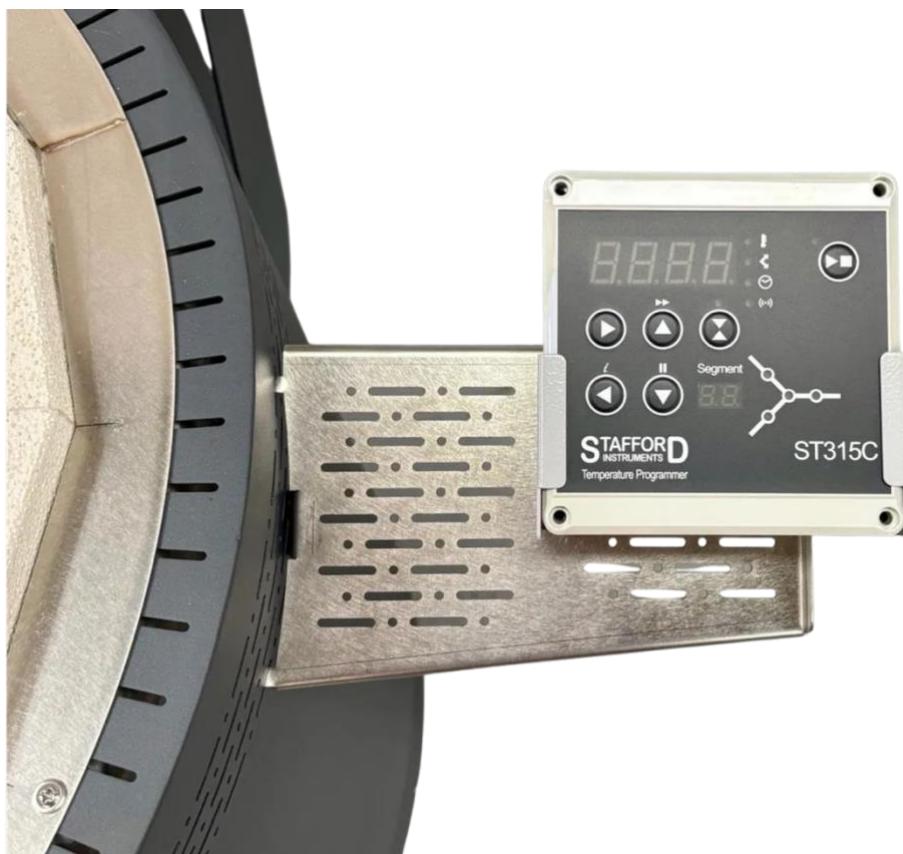


- Optional WIFI capable models are available at an additional cost.
- An included bracket is available to mount your controller to the side of the kiln if desired (as shown above).

Loading your kiln

Generally, kilns will fire more evenly when they are packed well, and a full load is fired. It is advisable to ensure your kiln is loaded evenly both across the width/depth and height of the kiln.

- Always ensure that your kiln is switched off and unplugged whilst loading or unloading.
- Make sure that all element channels are clear of any debris and have been vacuumed out.
- Check that your kiln shelves and props are sound and have no cracks that can cause them to collapse in the firing. Be sure the underside of shelves are clean to prevent dust or dirt falling onto the ware below.
- If large flat pieces are being fired, the edges should be placed between the elements. This may eliminate possible cracking caused by uneven heating.
- We recommend placing a shelf on the floor of the kiln to help protect the insulation bricks on the floor from damage and possible glaze spills. To save space, some people prefer to use a ceramic fibre mat that can be replaced as required.
- Place the shelves in the kiln carefully so that the walls of the kiln are not bumped or damaged. Use 3 props per level, as this is the most stable configuration. Place them in a triangle at an equal distance from each other (see image)
- Stack the props in a straight line one above the other as much as possible, to achieve the greatest possible stability.
- **Ensure all ware and furniture is completely dry.** If they are wet, then as they heat up, forming steam can lead to explosion of the items.
- Do not jar or shake the kiln after loading has started since your products on the shelf could be knocked down or the shelves may collapse.
- Keep shelves and wares at least 30mm from the thermocouple probe in the kiln and 30 mm from the wall of the kiln.

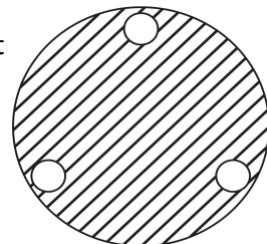

WARNING: Contact between ware and the thermocouple can cause disastrous overfiring. When placing and loading the kiln shelves, make sure they do not touch the thermocouple.

- Avoid positioning your shelves in line with the elements, as this can increase the risk of thermal shock and the bounce heat back onto the elements, damage them.
- **NEVER** attempt to unload your fired items until the kiln is cool enough (below 100°C), as serious burns could result.

Empty firing of the kiln on for first use

Before you start using the kiln, it must be fired empty.

- One empty firing is necessary to give the heating elements a protective oxide layer, which considerably extends the lifespan of the elements.
- Do this first firing with a completely empty kiln, we recommend the following program:
 - Firing up to 600°C in 8 hours (or 75°C / hr to 600°C.)
 - Thereafter 150°C (or SKIP – depending on the type of controller) per hour to 1100°C
 - Then hold this temperature and fire for 2 hours
- For the second firing, fill the kiln with completely DRY greenware and perform a bisque firing.



Loading and Firing Bisque ware (920°C - 1060°C)

When firing your bisque ware, it is essential that all items are “bone” dry. If they are not, then as the kiln heats up and moisture in the ware converts to steam you may experience explosion of your ware. If your ware feels cool, then it is probably damp. To minimize damage to greenware, it is best to use a temperature rise of no more than 60°C/hr over the first 2 hours of the firing to allow any moisture to escape gradually. For very thick or large pieces it may be worth doing a drying out firing at 40°C for 12 hours. The rule of thumb is ‘bigger & thick go low & slow’.

- Generally, when packing "greenware" in your kiln, items can touch each other, and items can be packed inside one another.
- It is best to fire a piece in its natural position; however, large flat items such as wall plaques or clocks should be fired on a flat side to prevent warpage.
- Thin cups may be fired upside down or stacked lip to lip, if the rim is strong enough.
- Cannisters and other pieces with lids should be fired with the lids in place to ensure a good fit.
- Always leave your kiln bung out until you have reached a temperature of 250°C-300°C. This will allow all the moisture to escape from the kiln. They can be replaced for the rest of the firing.

Loading and firing Earthenware (1040°C - 1080°C)

- Do not load families of red, green, yellow, or yellow-green glazes or any metallic or lustre glazes with greenware. Allow a minimum of 50mm of space around red glaze pieces.
- If it is necessary to mix loads, always try to place the red glaze separately on a shelf below the items which it may contaminate.
- Glazed pieces must not touch, or they will stick together. At least 15mm should be allowed between glazed pieces to prevent contamination from the release of bubbles and gases from other glazes.
- The tops of the shelves should have batt wash applied to protect against drops or runs of glaze. The kiln roof and the underside of the shelves should be clean to prevent dust particles from falling on the glazed ware.
- Glazed ware must be stilted (earthenware) or dry footed to prevent sticking to the shelves. For low fire glazes (cone 04,05,06) stiltling is recommended.
- If a piece wobbles when stilted, it may fall during the firing, be sure all stilted pieces are solid.
- It is a good idea to soak the kiln at temperature for 30 min to allow the temperature to even up throughout the kiln.
- Orton cones provide invaluable information about “heat work” that cannot be provided by a controller and so we would always recommend doing a glaze firing with the guidance of cones.

Loading and firing Mid-fire – Stoneware (1220°C - 1280°C)

- Stoneware cannot be placed on stilts as the item is likely to slump at higher temperatures.
- For glaze firing, the top of the shelves must be coated with kiln wash and the ware should be dry footed (this involves removing all unfired glaze from the foot of the piece as well as a reasonable margin above the foot to prevent glaze running onto a shelf).
- Orton cones provide invaluable information about “heat work” that cannot be provided by a controller and so we would always recommend doing a glaze firing with the guidance of cones.

Cooling the kiln

As a result of the insulating materials used in your kiln it may seem to take a considerable amount of time to cool sufficiently. Care should be taken when cooling any product, be it pottery, glass or metal.

- Do not open the kiln if the internal temperature exceeds 100°C. This can cause serious damage to the bricks through thermal shock.
- If you wish to speed up the cooling of the kiln, then bungs can be removed at 300°C. Wait until the temperature is below 100°C before opening the lid further. It is best to open the lid slowly and in stages if the kiln has not cooled to room temperature to avoid thermal damage to your ware.
- Be careful when unpacking the kiln as the furniture and ware are often hotter than the interior temperature. Heat resistant gloves are advised.

Maintenance

The life of a kiln can be extended for many trouble-free years of service if the kiln is treated with due care and routine maintenance is performed. These are but a few suggestions to ensure you get the most from your kiln.

- Examine the interior of the kiln to ensure it is clean and free of dust. Check the roof and walls for loose fragments of insulating firebrick that might fall onto your products. Vacuum the interior to remove all dust and any objects from around the elements.
- Check that kiln shelves are adequately coated with kiln wash (if required).
- Check the condition of your shelves and props for warping or cracks.
- Remove glass or glaze spots from the walls, bottom, or shelves of the kiln prior to the next firing. If this is not done, glass will re-melt and spread with each firing. Elements can also be damaged by direct glass or glaze contamination.
- Avoid moving your kiln un-necessarily. Over time the bricks will “bed down” and become brittle with firing. Constant movement may cause the bricks to break apart.
- Hinges will benefit from lubrication with WD-40.
- Do not allow your kiln to get wet – moisture is your enemy!



Pinning Elements

Due to the constantly heating and cooling the kiln elements, their elasticity will decrease over time.


Despite careful assembly and the fastening of the coils during manufacturing, movement of the elements cannot be completely prevented.

As an extra security for the coils, we have special pins which you can use to secure elements that are jumping grooves or moving. These are made of the same wire material as the coils.

WARNING: never use any other wire to make pins yourself.

This wire will not be resistant to high temperatures and can cause damage to your kiln and the elements.

- Use flat nose pliers for inserting the pins. Push the pins into the bricks, across a turn in the coil.
- As the kiln's bricks are of a soft material, the pins can be placed in grooves and corner of the kiln.
- The idea is to apply a clamp just to the left and right of every corner of the kiln.
- If applied into the corners, the coils will eventually pull the clamps out of the brick (see image).

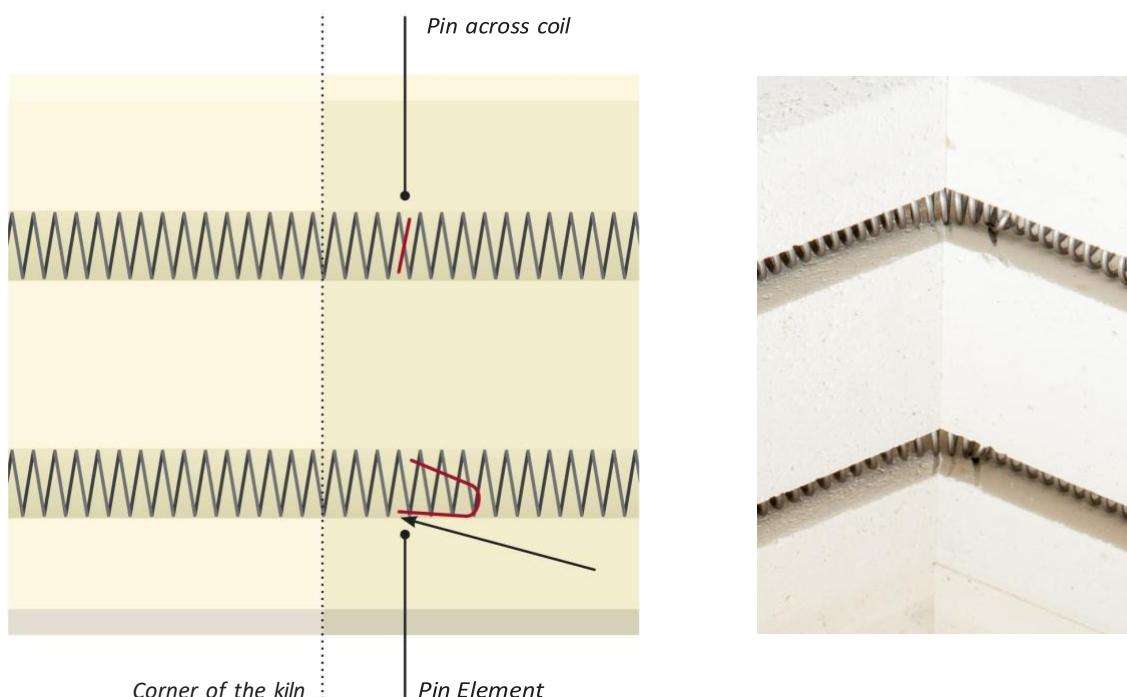

Kiln Furniture

Follow these tips to get the most out of your kiln furniture.

- **Always store your kiln shelves on their end.** Never store kiln shelves flat and certainly never flat stacked on top of each other. Doing so significantly increases the risk of shelves cracking.
- **Always use kiln wash** to minimise the risk of glaze runs ruining a shelf. Regularly scrape off and reapply your kiln wash.
- **Always flip** kiln shelves when using them in the kiln. This will minimise warping. All shelves will begin to warp, particularly at temperatures exceeding 1260°C. Thicker shelves minimise warpage, but may also be excessively heavy, so making loading them difficult. The best solution is to use shelves that you can manage easily and regularly flip them. This may require the application and sanding of kiln wash on alternative sides of the shelf (if the underside of a shelf is kiln washed, then you risk having flakes of kiln wash drop onto your glazed ware, causing damage, so best to remove and clean the underside).
- **Always** make sure your kiln shelves are **bone dry** when using them. If there is moisture in the shelves, as they heat, they are likely to suffer expansion cracks.
- **Always use moderate ramp rates** in the initial stages of firing up until 200°C (generally rates below 120°C /hr are safe). Fast ramp rates may cause rapid expansion of the shelves, leading to cracking. The same applies when cooling your kiln. Avoid rapid cooling below 250°C as sudden drops in temperature will cause thermal shock and cracking.
- **Always use 3 props** to support a shelf. This is the most stable configuration. Ensure the props are placed in line vertically, so that the load of each shelf is passed down the props.
- **Always check your shelves** carefully when packing your kiln. If a shelf is showing signs of cracking DON'T use it. Better to replace a suspect kiln shelf than risk a collapse of furniture and ware in the kiln.

Sadly, kiln shelves don't last forever, but by sticking to the above pointers you will prolong the life you get from them. The higher you fire, the more likely you are to experience warping and cracking of your shelves even with the best of kiln shelf care.

Fired Up Kilns offer not only traditional Cordierite-Mullite shelves but also OBSiC, NBSiC & SSiC shelves. Refer to our comparison chart on the [resources page](#) for more information.



Trouble Shooting

The problem	The possible cause	The solution
Increase in firing time	<ol style="list-style-type: none"> 1. Check program 2. Defective element/s 3. Check for burned or discoloured connections in kiln, wiring or wall receptacle 4. Ramp rate higher than kiln capability (this is not uncommon in programs with high ramp rates i.e. Greater than 150°C /hr above 1150°C) 	<ol style="list-style-type: none"> 1. Adjust program 2. Replace 3. Clean or replace as necessary 4. Reduce ramp rate
Kiln will not heat up as programmed	<ol style="list-style-type: none"> 1. Fuse or breakers blown 2. Controller not activated or is faulty 3. Burned power cord or isolator 4. Limit switch has disengaged 	<ol style="list-style-type: none"> 1. Replace or reset 2. Ensure temperature is set on auto controllers or that the correct program has been selected on your controller. Check thermocouple and replace if necessary. 3. Consult a qualified electrician 4. Ensure kiln lid/door is firmly engaging limit switch.
Wall outlet or plug heats up	<ol style="list-style-type: none"> 1. Loose connection in wall receptacle 	<ol style="list-style-type: none"> 1. Consult a qualified electrician
Safety switch or circuit breakers trip immediately after the kiln is turned on	<ol style="list-style-type: none"> 1. Moisture has built up in the kiln bricks 2. Short circuit in kiln 	<ol style="list-style-type: none"> 1. Place moisture absorbent material (Damprid) in the kiln and use heaters around the kiln to dry it out. To avoid in future, fire kiln to 200°C and soak for 3 hours every 2-3 weeks 2. Consult a qualified electrician to check wiring of the kiln for burn or discoloured connections, check for contact of a hot wire with the grounded portion of the kiln
Elements hum when the kilns is first turned on	<ol style="list-style-type: none"> 1. Normal – This is a 50 cycle hum which may resonate in the element until it is hot enough to soften 	<ol style="list-style-type: none"> 1. No action
Kiln over fires	<ol style="list-style-type: none"> 1. Firing time to long 2. Incorrect temperature set 3. Thermocouple issue 4. Faulty controller 	<ol style="list-style-type: none"> 1. Check your selected program 2. Choose correct temperature setting 3. Check that the thermocouple is protruding at least 15mm into kiln and is not in contact with any ware

		4. Consult supplier or kiln manufacturer
Kiln shuts off before desired temperature is reached	1. Thermocouple failure 2. Power failure	1. Replace thermocouple 2. Reactivate your controller
Elements becoming loose from the brick groove	1. Due to loosening of the pin caused by expansion and contraction of the element during repeated heating & cooling	1. Repin element. Be sure to heat element to above 300°C to avoid breaking due to the element becoming brittle over time & when cool.
No power to the kiln	1. Blown circuit breaker/tripped safety switch 2. Blown internal fuse	1. Check power board and reset breakers 2. Terminal box fuse as well as fuses in the controller. Get fuses checked.
Kiln heating up rapidly and not responding to controller inputs	1. Jammed contactor	1. TURN POWER OFF AT THE WALL OR UNPLUG KILN IMMEDIATELY and consult an electrician

Disclaimer

Please note that your kiln has been designed and manufactured for precision work. Your kiln must be operated in accordance with both this operating manual as well as the controller manual.

Pictures used in this manual are for display only, your actual product may vary.

For detailed information on the Fired Up Kilns [Terms & Conditions or Warranty](#), please refer to the resources section of the Fired Up Kilns website.



Kiln Firing Log

Kiln Type / Location: _____

This Kiln Firing Log is downloadable from the resources section of www.firedupkilns.com.au

Pyrometric Cones Temperature Chart

Temperature Equivalents for Orton Pyrometric Cones (°C) Cone Numbers 022-14



	Self Supporting Cones			Large Cones			Small		
	Regular – SSB		Iron Free – SSK	Regular – LRB		Iron Free – IFB			
Heating Rate*	15°C/hr	60°C/hr	150°C/hr	15°C/hr	60°C/hr	150°C/hr	60°C/hr	150°C/hr	300°C/hr
Firing Speed	Slow	Medium	Fast	Slow	Medium	Fast	Medium	Fast	Fast**
Cone #									
022		586	590						630
021		600	617						643
020		626	638						666
019	656	678	695		676	693			723
018	686	715	734		712	732			752
017	705	738	763		736	761			784
016	742	772	796		769	794			825
015	750	791	818		788	816			843
014	757	807	838		807	836			870
013	807	837	861		837	859			880
012	843	861	882		858	880			900
011	857	875	894		873	892			915
010	891	903	915	871	886	893	898	913	884
09	907	920	930	899	919	928	917	928	926
08	922	942	956	924	946	957	942	954	945
07	962	976	987	953	971	982	973	985	970
06	981	998	1013	969	991	998	995	1011	991
05½	1004	1015	1025	990	1012	1021	1012	1023	1020
05	1021	1031	1044	1013	1037	1046	1030	1046	1044
04	1046	1063	1077	1043	1061	1069	1060	1070	1067
03	1071	1086	1104	1066	1088	1093	1086	1101	1087
02	1078	1102	1122	1084	1105	1115	1101	1120	1113
01	1093	1119	1138	1101	1123	1134	1117	1137	1122
1	1109	1137	1154	1119	1139	1148	1136	1154	1146
2	1112	1142	1164				1142	1162	1160
3	1115	1152	1170	1130	1154	1162	1152	1168	1160
4	1141	1162	1183				1160	1181	
5	1159	1186	1207				1184	1205	
5½	1167	1203	1225						1221
6	1185	1222	1243				1220	1241	
7	1201	1239	1257				1237	1255	
8	1211	1249	1271				1247	1269	
9	1224	1260	1280				1257	1278	
10	1251	1285	1305				1282	1303	
11	1272	1294	1315				1293	1312	
12	1285	1306	1326				1304	1324	
13	1310	1331	1348				1321†	1346†	
14	1351	1365	1384				1388†	1366†	

Cones made with red iron oxide

* Heating Rate during the last 100°C of Firing ** Fired in a gas kiln

Cones made without iron oxide

Pyrometric cones have been used to monitor ceramic firings for more than 100 years. They are useful in determining when a firing is complete, if the kiln provided enough heat, if there was a temperature difference in the kiln or if a problem occurred during the firing.

Cones are made from carefully controlled compositions. They bend in a repeatable manner (over a relatively small temperature range - usually less than 40° F). The final bending position is an indication of how much heat was absorbed.

Behavior of Pyrometric Cones

Pyrometric cones deform due to the formation of glass and the pull of gravity as they are heated to their designed operating temperature. This is known as pyro plastic deformation. Careful control over the shape and composition allows Orton to provide a standardized product that reliably performs to known heating conditions. Cones bend and deform in an arc as they start to develop glass within. This behavior is gradual at first, and hastens as the cone reaches its maximum operating temperature. The time interval from when a cone begins to deform until the tip of the cone reaches the shelf is typically 15-25 minutes. The interpretation of the location of the tip of the cone along the bending arc can be done in a couple of ways. One method of interpretation is to correlate the position of the tip to the numbers on a clock face. Initially, the cone is in the 1 o'clock position and continues to deform until the tip is in contact with a shelf, the 6 o'clock position. A more precise method of interpretation is to use the Orton measuring template. The template measures the angle of deformation along a protracted scale numbered from 0 to 90°. The endpoint temperature for a cone is considered to be when the tip is measured with a 90° bend, or in the 5 o'clock position.

The difference in temperature between cones in the 90° (or 5 o'clock) position to one where the tip is touching the shelf is typically only a few degrees and is considered insignificant.

Temperatures shown on the Orton charts were determined using precisely controlled kilns in an

air atmosphere. Cones do not measure temperature alone. They measure heatwork, the combined effect of time and temperature. The role that heating rates have on the endpoint temperature is observed to be that the temperature required to cause a cone to bend will be higher for faster heating rates and lower for slower rates. Heating rates that simulate fast, medium, or slow firings were tabulated.

Temperatures shown for small cones were determined using a heating rate of 300C/hr (540F/hr) in a gas fired kiln. Small cones will come close to duplicating the results of self-supporting cones if mounted upright, properly simulating the position of a self-supporting cone. Typically, small cones will deform 7-10 degrees C earlier than a self-supporting cone, so the temperature values for a self-supporting cone can be used to determine an equivalent small cone temperature by subtracting 7-10 degrees C (or 12-18 degrees F). Placing a small cone or bar cone into a kiln shutoff device (Kiln sitter), will not always produce the desired temperature stated on the cone chart. To produce a properly fired result, the next cone higher in sequence is placed into the shutoff device and the result is confirmed by a cone placed inside the kiln on a kiln shelf.

Reducing atmospheres can affect the bending behavior of cones, especially the red colored cones manufactured between numbers 010-3. If these cones are used in the absence of oxygen, the red iron oxide used in the formulation can reduce and change the appearance so the cone will appear matte, green, or bloated. Orton recommends using the Iron free series for all reduction firings between cones 010 – 3.

For more information on pyrometric cones, contact Orton or visit us at www.ortonceramic.com

 **Orton**

The Edward Orton Jr. Ceramic Foundation
P.O. Box 2760 • Westerville, OH 43086-2760
(614) 895-2663 • (614) 895-5610 fax
info@ortonceramic.com
www.ortonceramic.com

These tables provide a guide for the selection of cones. The actual bending temperature depends on firing conditions. Once the appropriate cones are selected, excellent, reproducible results can be expected. Temperatures shown are for specific mounted height above base. For Self Supporting - 1 3/4"; for Large - 2"; for Small - 15/16". For Large Cones mounted at 1 3/4" height, use Self Supporting temperatures. † These Large Cones have different compositions and different temperature equivalents.

©2016 Orton Ceramic Foundation

Notes

Notes

Notes



FIRED UP KILNS

and pottery supplies

hello@firedupkilns.com.au

20 Helen Street, Heidelberg West, Victoria 3081, Australia

www.firedupkilns.com.au

ABN: 365 984 307 89

Fired Up Kilns works from the lands of the Wurundjeri Woi Wurrung and Bunurong peoples of the Kulin Nation and pay our respects to their Elders past and present.

We also acknowledge the Elders, Ancestors, cultures and heritage of all Aboriginal and Torres Strait Islander Nations.



Everyone is welcome at Fired Up Kilns.