

<b>Model Specified (Per Specification Worksheet Below)</b>	Notes:
Quantity: _____	_____
Job Name: _____	Type: _____
Job Location - City/State: _____	Date: _____

## SPECIFICATIONS

**Pole** – Stress rated laminated Alaskan yellow cedar bonded with durable moisture-resistant adhesives in conformance with ANSI A190.1 Standard for Wood Products – Structural Glued Laminated Timber under American Institute of Timber Construction (AITC).

**Section Size & Length** – Available section size: 4" x 4".  
Available lengths: 8' & 10'.

**Center Wire Raceway** – Poles possess a 3/4" x 3/4" center wire raceway.

**Pole Top Hardware** – Specify MC tenon tops with 3" O.D. cylinders for top mount applications. Specify PC protective caps for side mount applications. Pilot holes and through bolt holes can be supplied pre-drilled with submitted template.

**Direct Embedment Installation** – Refer to species durability testing data and installation suggestions and embedment recommendation tables at [www.EroVista.net](http://www.EroVista.net).

**Surface Texture** – Specify smooth or rough sawn texture.


**Fabrication Styles** – Specify eased, radiused or chamfered edge options.

**Factory Staining** – Poles can be factory stained with Sherwin-Williams® SuperDeck® semi-transparent stains, or can be painted or stained in the field to achieved desired color.

**Packaging** – Poles are job lot paper wrapped or can be individually paper wrapped.

**Design Criteria** – Reference selection tables and embedment depth recommendation tables at [www.EroVista.net](http://www.EroVista.net).

**Weight Per Lineal Foot: 3.5 lbs.**

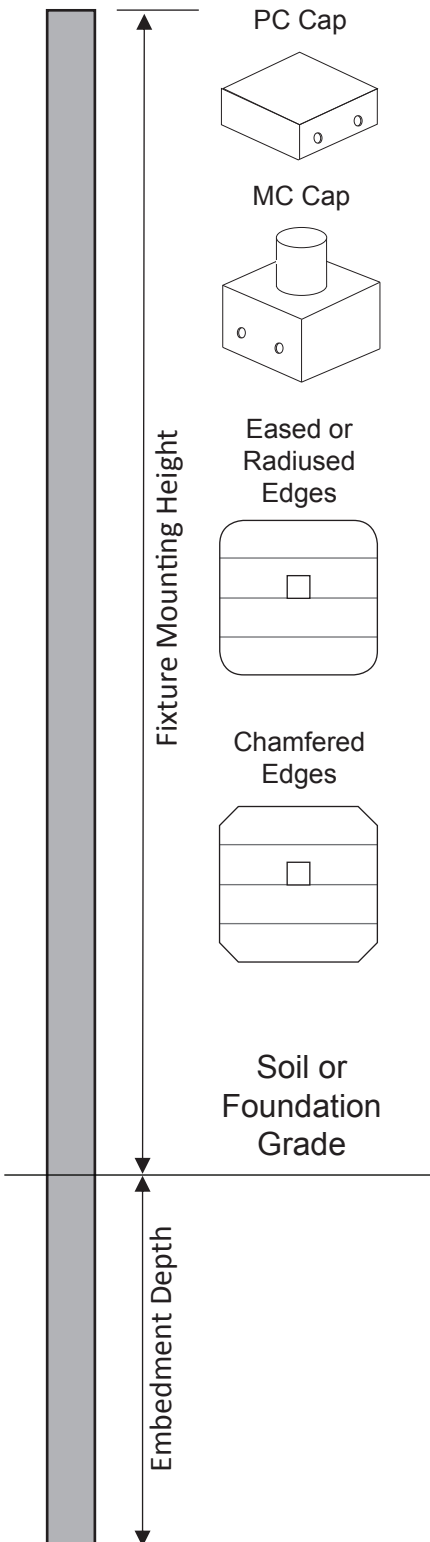

## EroVista Residential Lamp Post Specification Logic

Product	Length	Texture	Fabrication	Stain Option	Top Cap	Paper Wrap
R	8	A	E	X	MC44	I
EroVista Residential Series 4"x4"	8 = 8' 10 = 10'	A = Smooth * R = Rough	E = 1/8" eased edges * C = 3/4" chamfered edges P = Partial chamfer edges	X = No stain 8* SW_ _ _ _ ****	PC44** MC44*** N = No cap	J = Job lot * I = Individ.
<p>*Standard price. Additional pricing applies to other options. **Metal protective cap ***Metal 3" universal tenon cap ****SW_ _ _ _ Indicates Sherwin-Williams® SuperDeck® stain color The above residential light standard specification indicates R-8-A-E-X-RMC44-J 4" x 4" x 8' - smooth texture - eased edges - no stain - 3" tenon cap – individually paper wrapped</p>						

## EroVista Lamp Post Specification Worksheet

Product	Length	Texture	Fabrication	Stain Option	Top Cap	Wrap