



RESTAURANT EQUIPMENT HAWAII



CABINET CONSTRUCTION

FEATURES 430 TYPE STAINLESS STEEL EXTERIOR AND PAINTED ALUMINUM INTERIOR. OVERALL WORKING HEIGHT IS 35 1/4".

FOAMED-IN-PLACE CFC- AND HCFC-FREE POLYURETHANE INSULATION ENHANCES THE STRUCTURAL INTEGRITY OF THE CABINET.

INSULATED LID HELPS MAINTAIN SAFE PRODUCT TEMPERATURES.

FULL-LENGTH, 197/16" DEEP CUTTING BOARD FOR EASY PREP WORK.

DOORS FEATURE EASY-TO-USE, RECESSED HANDLES FOR QUICK INTERIOR ACCESS. DOORS STAY OPEN PAST 90° FOR EASY LOADING, BUT WILL SELF-CLOSE UNDER 90° TO SAVE ENERGY.

REFRIGERATION SYSTEM

ENVIRONMENTALLY SAFE R290 REFRIGERANT. REAR-MOUNTED CONDENSING UNIT POSITIONED FOR EASY MAINTENANCE.

SHELVING

2 EPOXY-COATED WIRE SHELVES ACCOMMODATE UP TO 90 LB. EACH.

MODEL FEATURES

PREPROGRAMMED DIGITAL CONTROLLER FEATURES AUTO-DEFROST FUNCTION.

TOP PAN RAIL HOLDS UP TO (9) 1/3 SIZE, 6" DEEP FOOD PANS. PAN RAIL IS AIR COOLED FROM THE BOTTOM.

SPECIAL FEATURES

- ECO-FRIENDLY R290 HYDROCARBON REFRIGERANT
- SLEEK, STAINLESS STEEL EXTERIOR
- PAINTED ALUMINUM INTERIOR MAINTAINS TEMPERATURES FROM 33-40°F
- FULL LENGTH, 197/16" DEEP CUTTING BOARD
- TOP HOLDS UP TO (9) 1/3 SIZE FOOD PANS UP TO 6" DEEP (SOLD SEPARATELY)
- INSULATED LIDS FOR BETTER TEMPERATURE RETENTION
- REFRIGERATED BASE WITH (2) ADJUSTABLE SHELVES INCLUDED
- 115V, 1/5 HP



PARTS & LABOR



COMPRESSOR

WARRANTY
RESIDENTIAL: REH ASSUMES NO LIABILITY FOR PARTS OR LABOR COVERAGE FOR COMPONENT FAILURE, FACTORY DEFECT OR ANY OTHER DAMAGES FOR UNITS INSTALLED IN NON-COMMERCIAL FOODSERVICE OR RESIDENTIAL APPLICATIONS.



RESTAURANT EQUIPMENT HAWAII

QUALITY COMMERCIAL EQUIPMENT FOR
RESTAURANTS & BARS

VISIT OUR ONLINE STORE FOR PRICING & INFORMATION ON
EQUIPMENT, FOOD TRUCKS & OUR COMMISARY KITCHEN

808-845-5052

TECHNICAL DATA

DIMENSIONS

EXTERIOR DIMENSIONS	70 ⁷ / ₈ "W x 36 ⁷ / ₈ "D x 42 ⁷ / ₈ "H
INTERIOR DIMENSIONS	48 ³ / ₈ "W x 22 ⁷ / ₈ "D x 26 ¹ / ₈ "H
NET VOLUME	16 CU. FT.
NET WEIGHT	418 LB.
GROSS WEIGHT	475 LB.
PACKAGING DIMENSIONS	76"W x 36 ¹ / ₂ "D x 45 ³ / ₄ "H

COOLING

TEMPERATURE RANGE	33°F-40°F
REFRIGERANT	R290
MAX. AMBIENT TEMPERATURE	90°F
DEFROSTING	AUTOMATIC
TEMPERATURE CONTROLLER	DIGITAL
HORSEPOWER	1/5


CONSTRUCTION

EXTERIOR DIMENSIONS	430 STAINLESS STEEL
INTERIOR MATERIAL	PAINTED ALUMINUM
INSULATION MATERIAL	FOAMED-IN-PLACE POLYURETHANE
SHELF SIZE	(2) 23 ⁵ / ₈ "W x 24 ⁷ / ₁₆ "D
SHELF MATERIAL	EPOXY-COATED STEEL
SHELF LOAD CAPACITY	90 LB.

ELECTRICAL

VOLTAGE	115
AMPS	9.8
Hz	60
PHASE	1
PLUG TYPE	NEMA 5-15P
ELECTRICAL CORD LENGTH	84"

PLAN VIEW

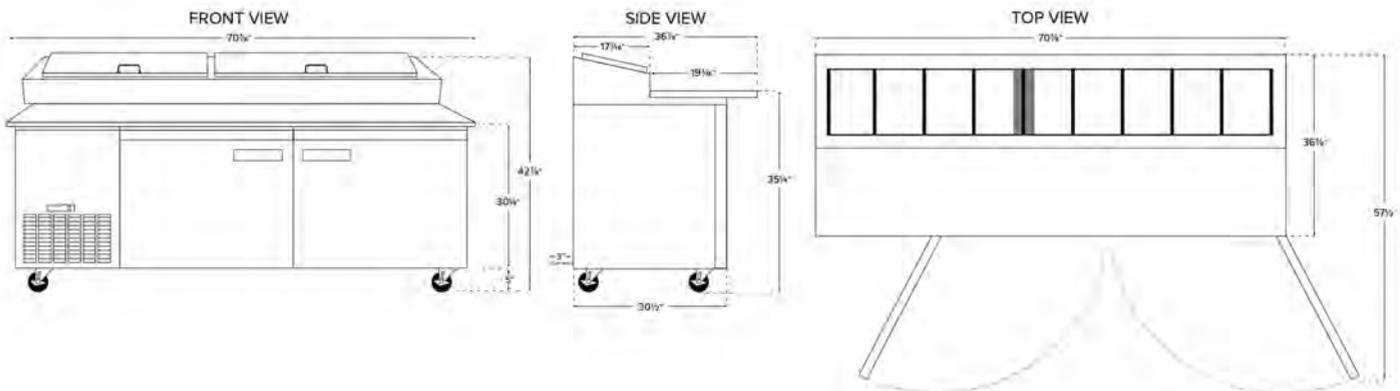

NEMA 5-15P