

# Grauwasser Recycling System, 65.000 l/d

## Greywater Recycling System, 65.000 l/d

GWl 65.2-65.000, indoor



Technisches Datenblatt / technical data

Kapazität		capacity
Gesamtvolumen Stufe 1	10.000 l	total volume stage 1
Gesamtvolumen Stufe 2	40.000 l	total volume stage 2
Gesamtvolumen Stufe 3	9.000 l	total volume stage 3
Tagesfiltrationsleistung	<b>65.000 l</b>	daily filtration capacity
DEA, empfohlen Doppelpumpenanlage	nicht im Lieferumfang / not included in delivery	twin pump station recommended

Anschlüsse		connections
Trinkwasser-Nachspeisung	optional	potable water back-up
Betriebswasser	optional	service water
Zulauf in die Anlage	DN 150	input to unit
Überlauf in Kanalisation	DN 150	overflow to sewage

Aufstellraum muss ausreichend belüftet und mit Bodenablauf versehen sein.

Working room needs to be airventilated, floor drain necessary.

Steuerung		control unit
Zeitintervalle für Belegung, Filtration vorprogrammiert*		time intervals for aeration, filtration pre-programmed*
Abmessungen (B x H x T)	600 x 1.900 x 400 mm (3x)	measurements (W x H x D)
* Anpassung bedarfsseitig möglich		* possible adjustment according demand

Trinkwassernachspeisung		main water supply
Magnetablaufventil 1" (optional, größer möglich)		solenoid valve 1" (optional, bigger sizes available)

Netzanschluss		electric main supply
Spannung	230 V / 50 Hz	voltage
Absicherung	bauseitig / by customer	fuse

Gewicht, Maße, Farbe		weight, measurements, colour
Leergewicht, Anlage	3.050 kg	weight empty
max. Gesamtgewicht im Betrieb	62.050 kg	unit working (max. weight)
Tank Sedimentation	Ø 2.300 mm; H 2.500 mm	sedimentation tank
Farbe	schwarz / black	colour
Volumen	10.000 l	volume
Tank Belegung Grauwasser	Ø 2.300 mm; H 2.500 mm	aeration tank greywater
Farbe	schwarz / black	colour
Volumen	4x 10.000 l	volume
Tank Filtration	L 2.400, B/W 700, H 2.200 mm	filtration tank
Farbe	schwarz / black	colour
Volumen	3x 3.000 l	volume
Trinkwassernachspeisung	optional	drinking water feed
Betriebswasseranschluss	optional	service water connection

[www.greenlife.info](http://www.greenlife.info)

# Grauwasser Recycling System, 65.000 l/d

## Greywater Recycling System, 65.000 l/d

GWl 65.2-65.000, indoor



The **GreenLife greywater-recycling-system GWl 65.2-65.000** has a daily greywater filtration capacity of up to 65.000 liters.

The **greywater-recycling-systems of GreenLife** are configured for the treatment of greywater, i.e. low polluted waste water from personal hygiene (shower, bath tub, hand washbasin). The applied BioMembranefilter-technology (MicroClear®) assures the complete separation of the biomass from the cleaned greywater. The clearwater is free from solids and a complete blocking of bacteria and germs, with a blocking rate of 99,9999%, guaranteed. The total recycling process is composed of the biological treatment, the ultrafiltration (MBR-Membrane bio-reactor) and will be stored after it in the clearwater tank.


The result is clear germ free service water (non-potable) available for reuse in WC's, cleaning purposes, garden irrigation and/or industrial applications!

### results:

The quality of the service water (non-potable) fulfills the requirements of the European (EU) guidelines for bathing water 76/160/EEC and 2006/7/EC and DIN 19650, class 2.

### consisting of:

- 1 sedimentation / separation tank** incl.:  
greywater inflow, -outlet into aeration incl. dip pipe, overflow to the sewage, discharge valve
- 2 aeration tanks greywater** incl.:  
inflow, aeration, air lifter into filtration tank, discharge, floating switch, pre-assembled
- 3 filtration tanks** incl.:  
greywater inflow, membrane filter and filtrate box, filtrate pump, negative buoyancy, cable and hose bushings,

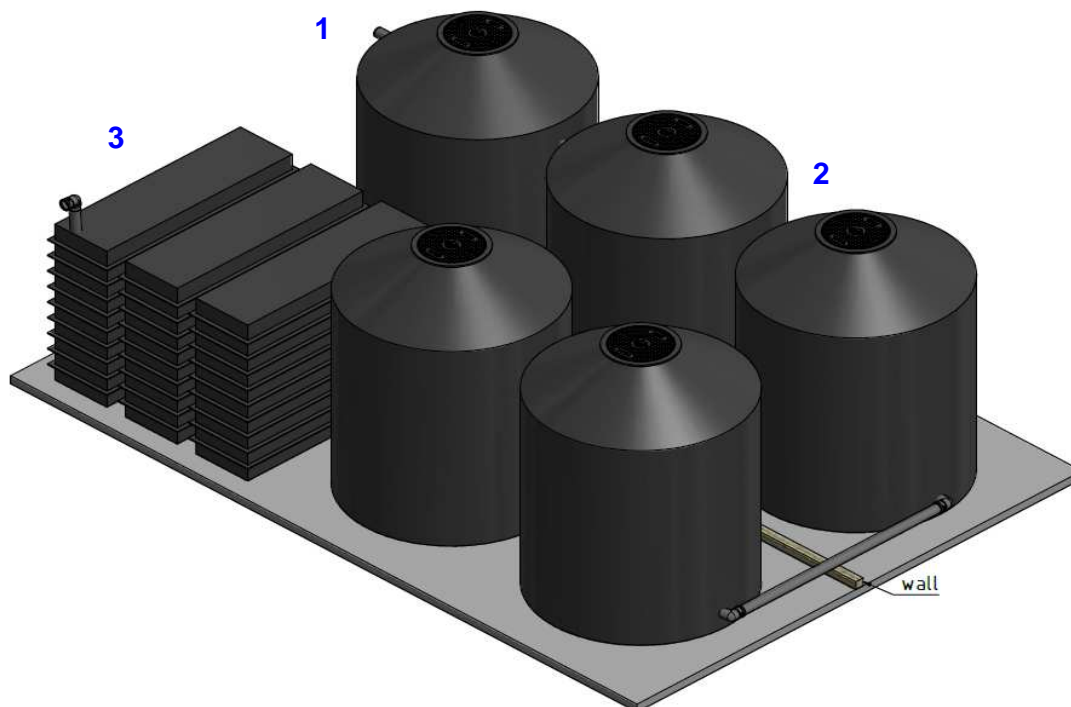

further general information about GreenLife greywater recycling under:

[Animation GreenLife greywater-recycling](#)

# Grauwasser Recycling System, 65.000 l/d

## Greywater Recycling System, 65.000 l/d

GW1 65.2-65.000, indoor

example of a system layout / installation drawing

