

# FLEX XC 3401 VRG "THE BEAST"




**THE BEAST**



# FLEX XC 3401 VRG "THE BEAST"

## Positive-drive orbital polisher

- VR microprocessor control: with tachogenerator constant speed control, soft start, continuous speed control trigger, restart protection after power failure, over-load protection, temperature monitoring and speed selection.
- 5/16" orbit for high efficiency.
- Permanent direct drive for an even polished surface.
- Cushioned special hook and loop pad for polishing.
- Removable, ergonomic handle and guard for optimum handling in all applications.
- Low heat generation on the surface makes it ideal for temperature-sensitive paints.
- Counterweight for smoother operation.
- Low height and low weight.
- Spindle lock.
- 10' power cord.

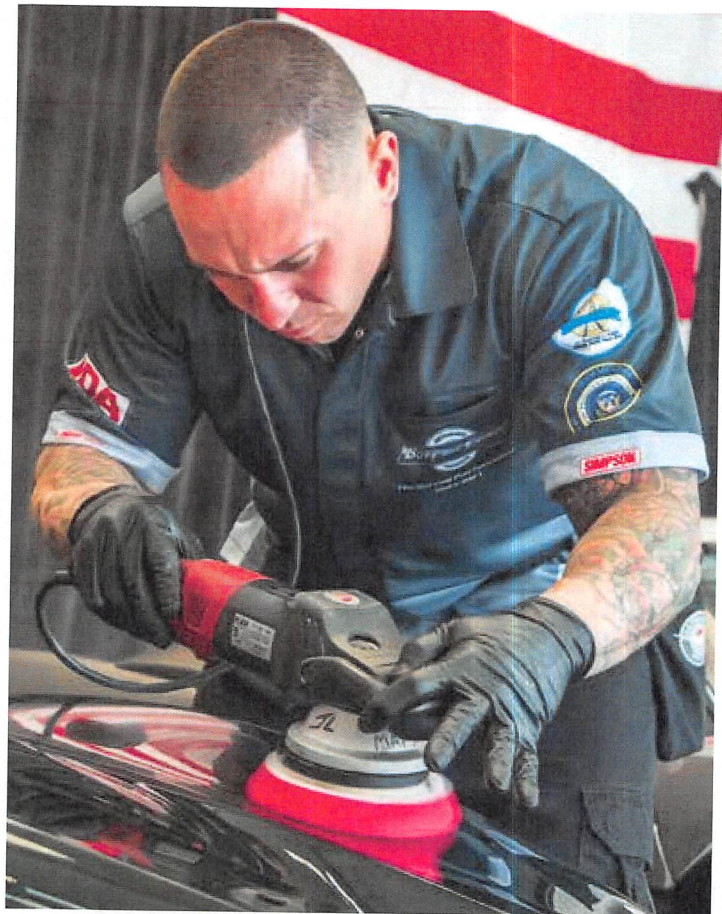

## SPECIFICATIONS

Max. back-up pad diameter	6.5"
Velcro pad	5.5"
Speed without load	160-480 rpm
Orbit	8mm
Orbit rate, without load	3200-9600 rpm
Power input	10 amp
Power output	590 watt
Weight	5.7 lbs

## XC 3401

### Standard equipment


- 1 grip cover
- 1 knob grip
- 1 special Velcro pad, 5.5" **Part no. 342.637**

Part	Part no.
XC 3401	334.839
XC 3401VRG-25Å 25Åcord	392.715

Also available for purchase:

4-3/8" Velcro Pad **Part no. 452.661**

**FLEX recommends 12/3 gauge extension cord, no longer than 50'**

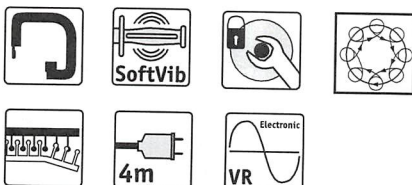

*Sanding discs/polishing pads are sold separately.*