


Cord Lift WireFree™ CL32 RTS

Part # 1002422




Offers control via Radio Technology Somfy® (RTS)


Applications



Cellular Shades



Pleated Shades



Roman Shades



Technical Features


Voltage Supply	DC
Index Protection Rating	IP 30
Limit Switch Type	Electronic
Limit Switch Capacity	180 Turns

Temperature Working Range 32°F to 140°F (0°C to 60°C)

Insulation Class Class III

Antenna RF antenna wire must be positioned outside of headrail and should not come in contact with metal surfaces for greatest RF range. RF wire may need to be repositioned for optimal performance. Antenna wire must not be cut.

Dimensions - in. (mm)

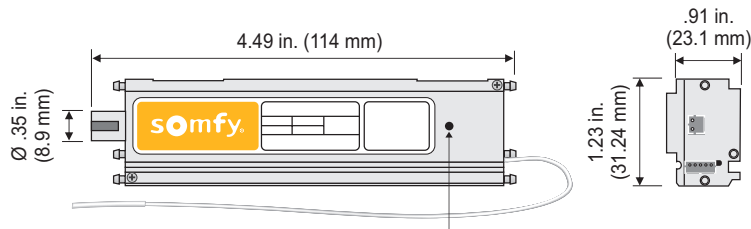


Reset and programming tool (#9013291) is no longer required or operational.


Fabrication Recommendations

- Do not compress fabric into headrail when setting upper limit. Bottom bar should be 1/4" lower than fully compressed position and should move freely once shade position is set.

Shade compressed less 1/4"



Shade fully compressed



- Somfy requires Energizer® Lithium batteries #L91 that provide patented safety protection.



Performances

Cord Lift WireFree™ CL32 RTS

Voltage	12V DC
Torque	0.34 Nm
Thermal Protection	2.5 minutes
Over Current Protection	1.2 amps
Sound Level	53 dBA
Speed	68 rpm
Radio Frequency for RTS	433.42 MHz

