

TARY.

SouthwireTM CORD SOUTHWIRETM



SOUTHWIRE.COM

OUR STORY

For over 60 years, Southwire has provided high quality electrical wire and cable to the commercial and industrial construction industries. Now, the name you trust provides durable, cutting-edge professional grade tools, designed with safety and productivity in mind. Look to Southwire® for solutions to all your electrical needs, from electrician's hand tools, meters, contractor equipment, temporary power, and extension cords.

SOUTHWIRE, THE COMPANY

Southwire Company, LLC is North America's leading manufacturer of wire and cable used in the distribution and transmission of electricity. Throughout its history, our company has sought to help provide power through our products, our service and by helping empower our customers, employees, and communities. With more than 6,800 people at customer service centers, manufacturing facilities and sales offices throughout North America, we are dedicated to developing the highest-quality products and legendary service.

THE DRIVE FOR EXCELLENCE

Driving for excellence starts with being responsive to our customers and the markets we serve. By creating business units, Southwire Company enables each to foster an entrepreneurial spirit, innovative solutions, and responsiveness required in today's business. At the same time each division can leverage the resources and rich history of Southwire Company as a whole.

THE PRODUCTS

To be successful requires products that give you solutions no matter what stage of the project cycle you are in. Our product teams and dedicated resources work together to listen to and work with our customers, creating solutions that deliver unparalleled value through product innovation, safety and efficiency.

THE SERVICE

Service is more than a word or a phone number; it's a tangible support system that assists you through the entire project cycle. Starting with our own knowledgeable customer service team, to our National Field Sales team, and our District Merchandising Specialists. In the office or in the field, we're there to lend a hand,

just when you need it most. Feel free to reach us at 1-855-SWTOOLS (855-798-6657)

TABLE OF CONTENTS

OUTDOOR CORDS

Standard	14
Red, White, & Blue	17
Tri-Tap	18
20A 5-20	20
Heavy Duty	21
Multi-Outlet	
Push-Lock	

COLD WEATHER CORDS

Polar Solar® Supreme	28
Polar Solar [®]	29
Cold Flex [™]	32

TWIST LOCK & GENERATOR CORDS

Twist Lock	36
Generator Cords	37
Generator Adapters	38

SPECIALTY CORDS


Royal® Welding Cords	. 43
Oil Resistant Agripro™ Cords	. 45
Convension Center Cords	. 48
Metal Power Strips	. 49
Coil Cords	. 50

RANGE, DRYER AND APPLIANCE

Range & Dryer	53
Replacement	54
Appliance	56

CORD MANAGEMENT AND REELS

Storage	58
Reels	59
Retractable Reels	60




16 GAUGE

LIGHT DUTY

SUGGESTED USE





3-PRONG


SPACE HEATERS

HEDGE TRIMMERS

JIG SAWS



AMP RATINGS










SUGGESTED USE



AMP RATINGS






15 **AMPS**



50'



13






THE GAUGE OF AN EXTENSION **CORD DETERMINES HOW MUCH ELECTRICITY IT CAN CARRY**



THE SMALLER THE NUMBER OF THE GAUGE, THE MORE **ELECTRICITY IT CAN CARRY**

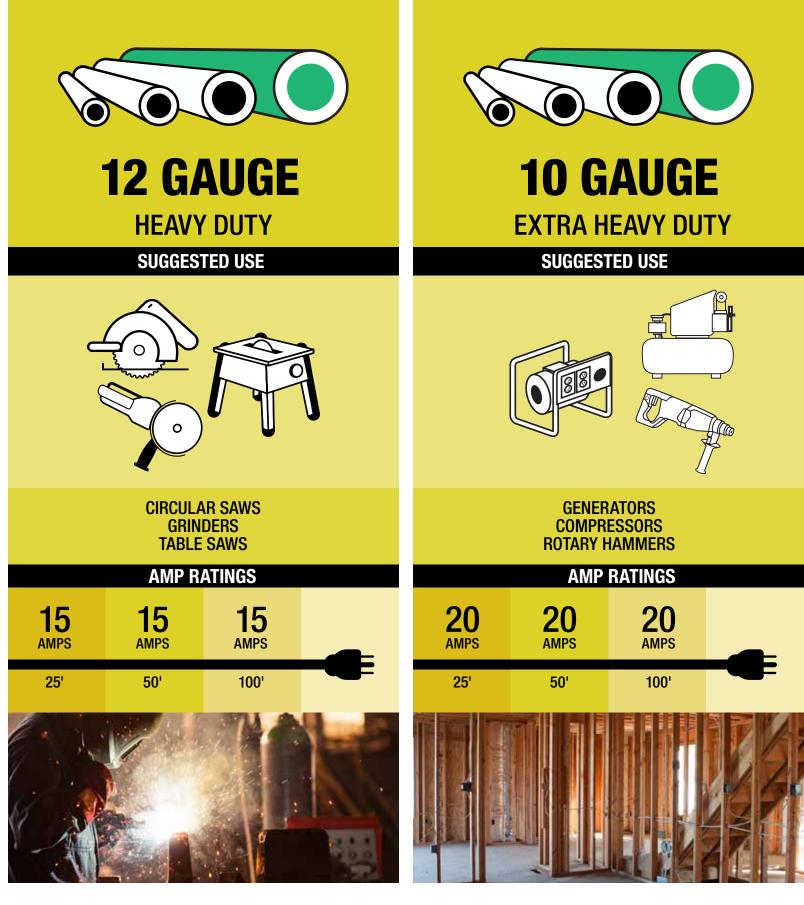




USING A LARGE NUMBER GAUGE CORD ON A HIGH-POWER PRODUCT LIKE A SAW, COULD RESULT IN DAMAGE OF A SAW

DECODING JACKET TYPES

S	SERVICE GRADE (also means extra hard service when not followed by J, V, or P)
J	HARD SERVICE
V	VACUUM CLEANER CORD (also light duty cable)
Ρ	PARALLEL CORD (also known as zip cord) - Always light duty
E	THERMOPLASTIC ELASTOMER (UL/NEC designation ONLY)
0	OIL RESISTANT*
Т	THERMOPLASTIC
W	OUTDOOR Includes sunlight resistant jacket and wet location rated conductors (formerly "W-A")
	HEATER CABLE
V W 1	FLAME RETARDANT (Vertical Specimen Flame Test)
F T 2	FLAME RETARDANT (Horizontal Specimen Flame Test)

*When only one "O" appears in a classification (i.e. SJEOW), only the outer jacket material is oil resistant. If two "O's" are in the classification (i.e. SEOOW), the insulation covering the conductors and the outer jacket insulation are both oil resistant.

NEMA CONFIGURATIONS

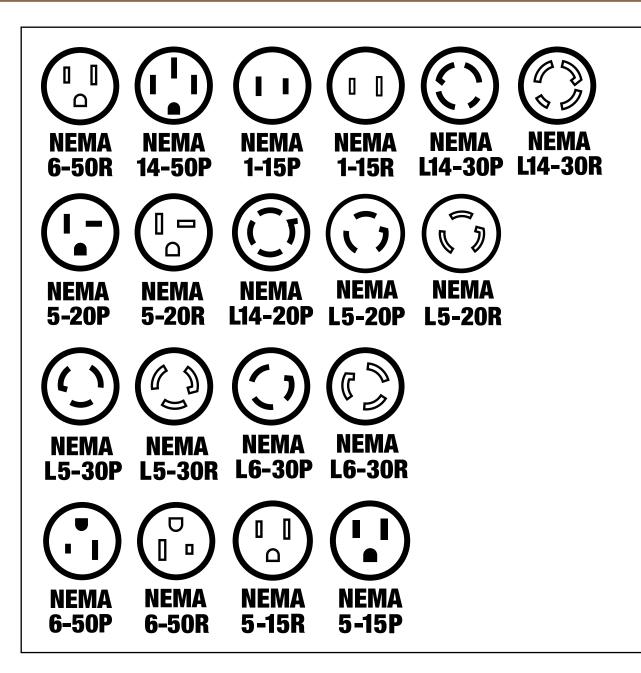


NEMA connectors are power plugs and receptacles used in North America and other countries that follow the National Electrical Manufacturers Association's guidelines. NEMA wiring systems have current ratings ranging from 15 to 60 amps (A) and voltage ratings ranging from 125 to 600 volts (V). Non-interchangeable connectors are made up of different combinations of contact blade widths, shapes, orientations, and dimensions that are specific to each voltage, electric current carrying power, and grounding method.

INKJET CORDS



Southwire's inkjet extension cords allow the user to put custom text printed on extension cord jacket to call out ownership, purpose, storage location, or even advertising. Inkjet is the fastest method to get a custom extension cord with the lowest purchase quantity.

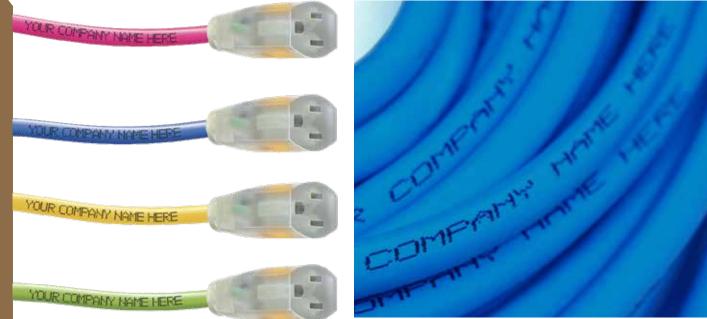

OPTIONS:

- Available in 4 high-viz colors: PINK, BLUE, YELLOW, AND GREEEN
- 12 Gauge
- 50' or 100'
- SJTW Jacket (-40°F to 140°F) and SJEOW Jacket available in yellow only (-58° F to 221°F)

TURN AROUND: 3 Weeks

MINIMUM RUN:

2,500'

HOW TO ORDER: WWW.SOUTHWIRE.COM/CUSTOMIZED-SOLUTIONS


CUSTOM CORDS

Southwire custom cords allow you to create the perfect cord for your needs. These cords are all UL listed with molded connectors and are fully customizable.

OPTIONS:

- 14-10 gauge as well as 6/3 and 8/1 temp power cords
- Outlet options: 5-15, L5-20, Tritap and 50A California Style
- Jacket Selection: SJTW, SJEOW, and Low Temp SJTW
- 30 color options for the cable and stripe
- Printed custom text options
- Any length available

CORD SET TYPE:

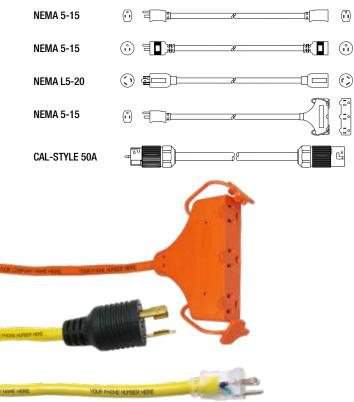

TURN AROUND:

6-8 Weeks

MINIMUM RUN:

10,000' & 5,000' runs for 20% surcharge

COLORS:



Don't see a connector or cable type you need? Talk to your Southwire sales team about other opportunities to get the cords configurations you need.

HOW TO ORDER: WWW.SOUTHWIRE.COM/CUSTOMIZED-SOLUTIONS









OUTDOOR EXTENSION CORDS

Southwire Outdoor Extension Cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.



OUTDOOR EXTENSION CORDS



STANDARD OUTDOOR



JACKET MATERIAL

PVC

JACKET TYPE

SJTW, SJOW, SJTOW, STW

APPLICATION

GENERAL OUTDOOR USE

TEMPERATURE RANGE

-40°F TO 140°F



HEAVY DUTY OUTDOOR	LOCKING & 20 AMPS
JACKET MATERIAL	JACKET MATERIAL
PVC	PVC
JACKET TYPE	JACKET TYPE
STW	SJTW
APPLICATION	APPLICATION
THICKER JACKET THAN A STANDARD OUTDOOR CORD FOR INCREASED DURABILITY	PLUGS & RECEPTACLE NEMA CONFIGURATIONS ARE HIGH AMPERAGE APPLICATIONS TYPICAL OF TEMP POWER & GENERATORS
TEMPERATURE RANGE	TEMPERATURE RANGE
-40°F TO 140°F	-40°F TO 140°F


STANDARD OUTDOOR EXTENSION CORDS WITH LIT ENDS





Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Pressure Washer, Electric Drill



STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
540836		STW	3'	0.9 m	Red/Black		12
541901] [22'	7 m	Red/Black		6
2487SW8804			25'	7.6 m	Red	15	12
2488SW8804	- 14/3				Red		6
541902	14/3		50'	15.2 m	Red/Black		5
54800401					Neon Pink	13	13
2489SW8804			100'	30.5 m	Red	15	6
541909					Red/Black		3
2577SW000H					Neon Blue		
2577SW000X				7.6 m	Neon Green		12
547703			25'		Dark Green/Yellow		
2577SW000A					Neon Pink		
2587SW8802]				Yellow		
2578SW000H		SJTW			Neon Blue		
2548SW0064					Neon Blue/Red		
2548SW00HX					Neon Blue/ Neon Green		
2548SW0052	12/3	12/3			Dark Green/Yellow	15	
2548SW0054]				Lime Green/Red		
2578SW000X]				Neon Green		_
2548SW003V			50'	15.2 m	Neon Orange/ Neon Blue		8
2578SW000A	-			Neon Pink			
2548SW0077				-	Neon Pink/ Lime Green		
2548SW0041					Red/White		
2588SW0002				Yellow			
2548SW0022]				Yellow/Purple		

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY		
2549SW0064					Neon Blue/Red				
2579SW000H							Neon Blue		
2549SW0054					Lime Green/Red				
2579SW000X				Neon Green					
2549SW0052]				Dark Green/Yellow				
2549SW003V	12/3		100'	30.5 m	Neon Orange/ Neon Blue		4		
2549SW0077					Neon Pink/ Lime Green				
2579SW000A					Neon Pink				
2549SW0041		SJTW			Red/White	15			
2549SW0022					Yellow/Purple				
2589SW0002					Yellow				
2687SW0002			25'	7.6 m	Yellow		6		
26480064					Neon Blue/Red				
26480054			50'	15.2 m	Lime Green/Red		4		
2688SW0002	10/3				Yellow				
26490064				Neon Blue/Red					
26490054]		100'	30.5 m	Lime Green/Red		3		
2689SW0002					Yellow				






STANDARD OUTDOOR EXTENSION CORDS WITH NON-LIT ENDS



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Pressure Washer, Electric Drill



STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY		
22078803			25'	7.6 m		13	12		
22088803	16/2		50'	15.2 m	Orange	Orange	13	6	
22098803			100'	30.5 m		10	6		
2211SW8808			10'	3 m	Black		24		
2304SW8803			10'	3 m	Orange		24		
2306SW8808			15'	4.6 m	Black	10	18		
2305SW8803	16/3		15'	4.6 m		13	18		
2307SW8803				SJTW	25'	7.6 m	0.00000		12
2308SW8803			50'	15.2 m	Orange	10	12		
2309SW8803			100'	30.5 m			6		
2407SW8804			25'	7.6 m		15	12		
2408SW8804	14/3	14/3	14/3	50'	15.2 m	Red	15	6	
2409SW8804			100'	30.5 m		13	6		
517	10/0		50'	15.2 m	Orongo	15	2		
518	10/3		100'	30.5 m	Orange	15	2		




RED, WHITE, AND BLUE EXTENSION CORDS WITH LIT ENDS



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Pressure Washer, Electric Drill





STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2547SWUSA1			25'	7.6 m			12
2548SWUSA1	10/0	SJTW	50'	15.2 m	Dod/M/bito/Dhuo	15	8
65301USA01	12/3		75'	22.86 m	Red/White/Blue	15	4
2549SWUSA1			100'	30.5 m			4






TRITAP OUTDOOR EXTENSION CORDS WITH LIT ENDS

4189SW8802




Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Pressure Washer, Electric Drill



STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
540835*	14/3	STW	3'	0.9 m	Red		6
4187SW8802			25'	7.6 m			12
4188SW8802	12/3		50'	15.2 m		15	6
4189SW8802		SJTW	100'	30.5 m	Yellow	15	4
4388SW8802	- 10/3		50'	15.2 m			4
4389SW8802	10/3		100'	30.5 m	1		3








TRITAP OUTDOOR EXTENSION CORDS WITH NON-LIT ENDS



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Pressure Washer, Electric Drill



STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
4004SW8803			6'	1.8 m	Orange		18
4217SW8804	14/3	SJTW	25'	7.6 m		15	12
4218SW8804	- 14/3	331W	50'	15.2 m	Red		6
4219SW8804			100'	30.5 m		13	6
4112SW8802	12/3	STW	2'	0.6 m	Yellow	15	12
19100002*		12/3 SJTW	25'	7.6 m		15	12




20A 5-20 EXTENSION CORD



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Pressure Washer, Electric Drill



STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
26188802	10/3	SJTOW	50'	15.2 m	Yellow	20	0
65038701	10/3	5J10W	50	15.2 11	Black	20	2






HEAVY DUTY OUTDOOR EXTENSION CORD




Southwire heavy-duty extension cords have a thicker jacket than standard outdoor cords to withstand common jobsite wear and tear.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Table Saw, Heat Gun, Work Light



STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2457SW0003			25'	7.6 m		15	6
2458SW0003	14/3		50'	15.2 m		15	4
2459SW0003		STW	100'	30.5 m	0100000	13	3
2557SW0003	12/3	51W	25'	7.6 m	Orange		6
2558SW0003		12/3	50'	15.2 m		15	4
2559SW0003			100'	30.5 m			3

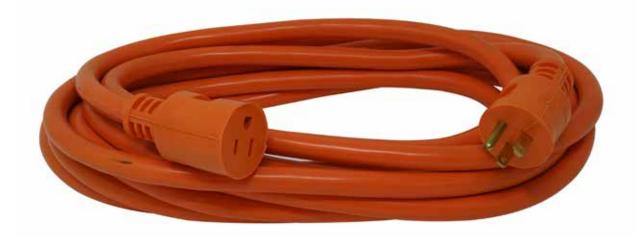


MULTI-OUTLET EXTENSION CORDS



Southwire heavy-duty extension cords have a thicker jacket than standard outdoor cords to withstand common jobsite wear and tear.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Table Saw, Heat Gun, Work Light



* Black Plugs

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
90028802*			6'	1.8 m	Yellow		6
3130	- 14/3		9'	2.7 m	Black		4
90018802	14/3	STW	25'	7.6 m	Yellow	15	4
65038901]		25'	7.6 m	Black		2
65039101	12/3		50'	15.2 m	Black		2






PUSH-LOCK EXTENSION CORDS



Southwire push-lock extension cords keep your tools plugged in while doing common yard work.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Push Mower, Leaf Blower, Hedge Trimmer



STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
24388826	14/3		50'	15.2 m	Yellow/Blue	15	4
24398826	14/3	SJTW	100'	30.5 m	Yellow/Blue	13	3
25388828	12/3		50'	15.2 m	Yellow/Black	15	4



COLD WEATHER EXTENSION CORDS

Southwire Cold Weather Extension Cords are best used in sub-zero temperatures. Our cords are designed with special compounds in the outer jacket that stays flexible and prevents damage in freezing cold weather. We offer varieties of bright colors that are easily seen on the snow.

WEAT



Typical extension cords become very hard to work with in the cold, the jackets will not flex and will hold their position; and in some cases, the jacket will become brittle and break, losing your electrical connection or exposing copper and creating an unsafe working condition.

If you are working in a cold environment, you need the right cold weather extension cord for the job.



COLD WEATHER



COLD FLEX™



JACKET MATERIAL

TPE

JACKET TYPE

COLDFLEX SJTW

APPLICATION

GENERAL COLD WEATHER LESS FLEXIBLE IN EXTREME LOW TEMPERATURES

TEMPERATURE RANGE

-58°F TO 140°F



COLD OR HOT OUTDOOR ENVIRONMENTS

APPLICATION

SJEOOW

JACKET TYPE

TPE

JACKET MATERIAL

POLAR/SOLAR®

POLAR/SOLAR® SUPREME



JACKET MATERIAL

PREMIUM TPE

JACKET TYPE

SJEOW

APPLICATION

EXTREME COLD OR HOT OUTDOOR **ENVIRONMENTS**

TEMPERATURE RANGE

-94°F TO 221°F




POLAR/SOLAR® SUPREME EXTENSION CORD

1439SW0061



Polar/Solar[®] Supreme extension cords are formulated to offer superior jobsite performance in extremely cold weather.

- Temperature Rating of -94°F to 221°F (-70°C to 105°C)
- 125 Voltage Rating
- Abrasion, chemical and oil resistant
- Common Applications: Cable Puller, Chop Saw, Rotary Hammer Drill



STOCK #	GAUGE Conductor	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
1437SW0061			25'	7.6 m		15	12
1438SW0061	14/3		50'	15.2 m		15	6
1439SW0061		C IFOW	100'	30.5 m	Blue/White	13	6
1637SW0061		SJEOW	25'	7.6 m	Dide/ Willie	15	12
1638SW0061	12/3		50'	15.2 m		15	6
1639SW0061			100'	30.5 m		15	4




POLAR/SOLAR® EXTENSION CORD




 $\ensuremath{\mathsf{Polar}}\xspace{\mathsf{Solar}}\xspace{\texttt{Solar}}\xspace{\texttt{extension}}$ cords are built to stay flexible under the most extreme temperatures.

- Temperature Rating of -58°F to 221°F (-50°C to 105°C)
- 125 Voltage Rating
- Abrasion, chemical and oil resistant
- Common Applications: Cable Puller, Chop Saw, Rotary Hammer Drill



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
1287SW0002			25'	7.6 m		13	12
1288SW0002	16/3	SJEOW	50'	15.2 m	Yellow	13	12
1289SW0002			100'	30.5 m] [10	6
14840002			10'	3 m		15	24
1487SW0002	14/3		25'	7.6 m	Yellow	15	12
1488SW0002	14/3		50'	15.2 m	renow	15	12
1489SW0002			100'	30.5 m		13	6
1427SW0008			25'	7.6 m		15	12
1428SW0008	14/3		50'	15.2 m	Black	15	6
1429SW0008			100'	30.5 m		13	6
1687SW0002		SJEOOW	25'	7.6 m			12
1688SW0002	12/3		50'	15.2 m	Yellow		6
1689SW0002			100'	30.5 m			4
1628SW0008	12/3		50'	15.2 m	Black	15	6
1629SW0008	12/3		100'	30.5 m	DIACK	15	4
1787SW0002			25'	7.6 m			6
1788SW0002	10/3		50'	15.2 m	Yellow		4
1789SW0002			100'	30.5 m			3

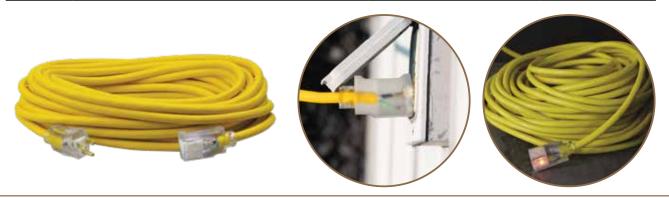

COLD WEATHER CORDS | POLAR/SOLAR®

BUILT FOR DURABILITY. BUILT FOR RELIABILITY. BUILT FOR WORK.™ | 29


POLAR/SOLAR® SJEOOW TRIPTAP

3487SW0002




Polar/Solar[®] extension cords are built to stay flexible under the most extreme temperatures.

- Temperature Rating of -58°F to 221°F (-50°C to 105°C)
- 125 Voltage Rating
- Abrasion, chemical and oil resistant
- Common Applications: Cable Puller, Chop Saw, Rotary Hammer Drill



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3487SW0002			25'	7.6 m			12
3488SW0002	12/3		50'	15.2 m			6
3489SW0002		SJE00W	100'	30.5 m	Yellow	15	4
3588SW0002	10/2		50'	15.2 m			4
3589SW0002	10/3		100'	30.5 m			3





POLAR/SOLAR® SEOOW TRIPTAP


STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3482SW8802	12/3	SEOOW	2'	0.61 m	Yellow	15	15

POLAR/SOLAR® SEOOW HEAVY-DUTY OUTDOOR EXTENSION CORDS




Polar/Solar[®] extension cords are built to stay flexible under the most extreme temperatures.

- Temperature Rating of -58°F to 221°F (-50°C to 105°C)
- 125 Voltage Rating
- Abrasion, chemical and oil resistant
- Common Applications: Cable Puller, Chop Saw, Rotary Hammer Drill



STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
1567SW0002			25'	7.6 m		15	6
1568SW0002	14/3		50'	15.2 m		15	4
1569SW0002		SEOOW	100'	30.5 m	Yellow	13	3
1767SW0002		3E00W	25'	7.6 m		15	6
1768SW0002	12/3		50'	15.2 m			4
1769SW0002			100'	30.5 m			3

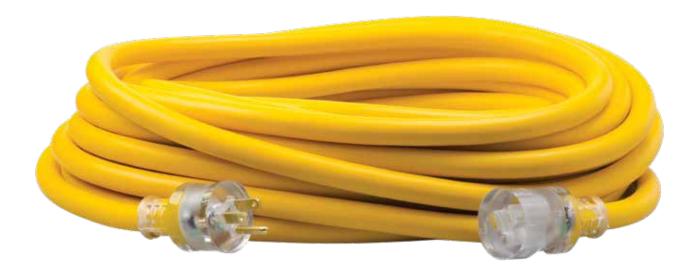


COLDFLEX™ OUTDOOR EXTENSION CORDS

2367SW8806



ColdFlex[™] extension cords withstand harsh, winter temperatures, and have a highly visible bright blue jacket to increase safety.

- Temperature Rating of -58°F to 140°F (-50°C to 60°C)
- 125 Voltage Rating
- Common Applications: Snow Thrower, Electric Chainsaw, Work Light



STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2367SW8806			25'	7.6 m		13	12
2368SW8806	16/3		50'	15.2 m		13	12
2436			100'	30.5 m	Blue	10	6
2467SW8806	14/3	ColdFlex SJTW	25'	7.6 m		15	6
2468SW8806			50'	15.2 m		15	6
2469SW8806			100'	30.5 m		13	3
2437	12/3		25'	7.6 m		15	12
2568SW0006			50'	15.2 m		15	3
2569SW0006			100'	30.5 m		15	4




COLDFLEX™ TRITAP OUTDOOR EXTENSION CORDS



ColdFlex[™] extension cords withstand harsh, winter temperatures, and have a highly visible bright blue jacket to increase safety.

- Temperature Rating of -58°F to 140°F (-50°C to 60°C)
- 125 Voltage Rating
- Common Applications: Snow Thrower, Electric Chainsaw, Work Light



STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	
32678806	14/3	ColdFlex SJTW	25'	7.6 m				
32688806	14/3		50'	15.2	Blue	15	6	
41688806	12/3							



TWIST LOCK & GENERATOR EXTENSION CORDS


Southwire Twist Lock Extension Cords have a unique blade design that allows the cords to lock into receptacles or outlets with a simple twist action. We offer a vast selection of Generator Extension Cords with different amperage levels for different needs.



TWIST LOCK & GENERATOR

Often, with generator cords, this primary need comes down to having the right plug and receptacle you need to get the job done. Southwire has a broad assortment of cords and adapters to help you deliver power to where you need it as efficiently as possible.

COMMON GENERATOR NEMA CONFIGURATIONS

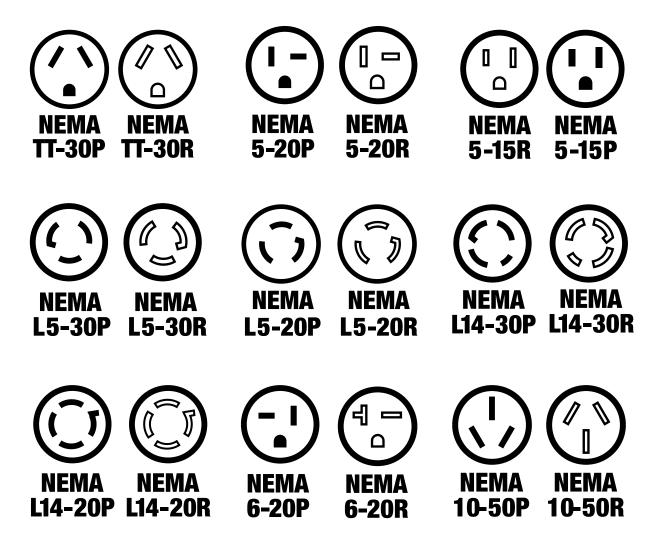

When considering what generator cables and adapters you need for a project, you want to avoid voltage drop from the generator. To do this, utilize as short a cable as possible, along with the largest conductor (smallest AWG) and a connector with as high amperage and voltage rating possible. For instance, you will get less power and greater voltage drop out of a generator using a 100' 15 amp 12/3 extension cord with 5-15 plugs compared to a 50' 20 amp 10/3 extension cord with a 5-20 plug.

TWIST LOCK & GENERATOR

L5-20 TWIST LOCK EXTENSION CORDS



Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Generator, Pool Pump
- NEMA L5-20P



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
9208SW8802	12/3	SJTW	50'	15.2 m	Yellow	20	6	NEMA L5-20P	
90288802		STW					4		
9209SW8802		SJTW	100'	30.5 m		15 Black			
9029SW8802		STW					3		NEMA L5-20R
92390008		SEOOW			Black				2011

L14-30 TWIST LOCK EXTENSION CORDS



Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Generator, Pool Pump
- NEMA L14-30P



STOCK #	GAUGE CONDUCTOR	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
65172740	10/4	STW	10'	3.05 m	Yellow	30	6	NEMA L14-30P	NEMA L14-30R
65172840			20'	6.1 m			6		
65038801			25'	7.6 m	Black		2		
65173040			40'	12.19 m	Yellow		6		
65173140			50'	15.24 m			2		L14-301

TWIST LOCK & GENERATOR

GENERATOR ADAPTERS CONVERT TO 20A (5-20R)



Southwire generator adapters provide more usable receptacles during temporary power outages and on jobsites.

- Temperature Rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating

STOCK #	GAUGE Conductor	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
19158802	10/3					15		NEMA L5-30P	
19248802	12/4				Yellow	20		NEMA L14-20P	NEMA 5-20R Lighted
19348802	10/4	STW	3'	0.9 m		20	4	NEMA L14-30P	Lighted
65038601	10/4				Black	20		NEMA L14-30P	NEMA 5-20R (x2) Lighted

TWIST LOCK & GENERATOR

TWIST LOCK ADAPTERS



Southwire twist-to-lock adapters easily convert plugs and receptacles to fit your specific application.

- Temperature Rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Generator, Pool Pump

STOCK #	GAUGE CONDUCTOR	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
90208802			9''	0.2 m		15-20		NEMA 5-15P	NEMA L5-20R
90218802			9''	0.2 m		15-20	10		NEMA 5-15R
90228802	12/3		20''	0.5 m	Yellow	20	10	$(\tilde{\mathbf{x}})$	NEMA L5-20R (x2)
90238802		STW	2'	0.6 m		20		NEMA L5-20P	NEMA L5-20R (x3)
90848802			2'	0.6 m		15	6		NEMA 5-15R Lighted Tritap
19148802	10/3		3'	0.91 m	Yellow	20-30	4	NEMA L5-30P	NEMA L5-20R (x2)
18640008	10/4	SEOOW	10'	3.05 m	Black	50	4	NEMA 14-50P	NEMA L14-30R
18540008	10/4	3E00W	ĨŬ	3.05 m	DIAUK	30	4	NEMA L14-30P	NEMA L14-30R

TWIST LOCK & GENERATOR

5-15 ADAPTERS

90188802



Southwire adapters transform your single outlet into multiple outlets.

- Temperature Rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Generator, RV

SPECIFI	CATIONS								*Black plugs
STOCK #	GAUGE CONDUCTOR	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
90188802* 90198802*	- 12/3	STW	2'	0.6 m	Yellow	15	12	NEMA 5-15P	NEMA 5-15R (x2)

SPECIALTY EXTENSION CORDS & POWER DELIVERY

Southwire specialty cords provide a broad assortment of cables to suit your needs. These cords are designed to resist damage against high powered machinery while also being oil, solvent, and water resistant.





JACKET MATERIAL

OIL RESISTANT RUBBER

JACKET TYPE

SJ00W

APPLICATION

HARSH GARAGE & WELDING ENVIRONMENTS

TEMPERATURE RANGE

-40°F T0 195°F







JACKET MATERIAL

OIL RESISTANT VINYL

JACKET TYPE

SJEOW/SJOW/SJTOW

APPLICATION

HARSH GARAGE & AGRICULTURAL ENVIRONMENTS

TEMPERATURE RANGE

-40°F TO 140°F



ROYAL® WELDING CORDS

The flow of most devices that need power is fairly consistent. Welders, on the other hand, must change the flow to melt metals and connect work parts. Although these settings are regulated on the welder rather than at the power source, the extension cord that brings the power supply must be able to handle them. That's why voltage, gauge, length and durability are all important considerations to make welding extension cord safe.

Southwire's Royal welding cords are specifically designed to resist damage from slag while also being oil, solvent, and water resistant.



ROYAL® OUTDOOR EXTENSION CORDS



Royal[®] extension cords are resistant to welding slag and are the most flexible extension cord on the market.

- Temperature Rating of -40°F to 194°F (-40°C to 90°C)
- 125 Voltage Rating
- Abrasion, Chemical, and Oil Resistant
- Common Applications: Welder, Angle Grinder, Rotary Hammer Drill

NEMA	NEMA
5-15R	5-15P

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3677SW0008			25'	7.6 m	Black		12
3687SW0002			25	7.0 11	Yellow		12
3676SW0008			40'	12.19 m	Black		6
3678SW0008	12/3	SJOOW	50'	15.2 m	Black	15	6
3688SW0002	12/3	2100W	50	15.2 11	Yellow	10	0
3680SW0008			80'	24.38 m	renow		3
3679SW0008			100'	30.5 m	Black		4
3689SW0002			100	30.3 III	Yellow		4





SPECIALTY CORDS | ROYAL® CORDS

6-50 WELDER EXTENSION CORD

19178806



Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Generator, Pool Pump
- NEMA L5-20P

SPECIFICATIONS

STOCK #	GAUGE Conductor	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
19178806	8/3	STW	25'	7.6 m	Blue	40	2	NEMA 6-50P	NEMA 6-50R

WELDING PLUG ADAPTER

STOCK #	GAUGE CONDUCTOR	STW	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
19408808	8/3	STW	1.5'	0.46 m	Black	40	12	NEMA 14-50P	NEMA 6-50R

AGRIPRO™ CORDS

Oil Resistant Cords (SJTOW) are designed to withstand harsh conditions where fuel and fertilizers are often used. As basic SJTW cords come into contact with common chemicals, they can swell and become brittle.




AGRIPRO™ OIL RESISTANT EXTENSION CORD



Agri-Pro[™] extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature Rating of -58°F to 221°F (-50°C to 105°C)
- 125 Voltage Rating
- Abrasion, Chemical and Oil Resistant
- Common Applications: Air Compressor, Chop Saw, Electric Chain Saw



STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
12270008	16/3	SJEOW	25'	7.6 m		13	12
12280008	10/3	SJEUW	50'	15.2 m		15	12
64815701			25'	7.6 m		15	12
64816001	14/3		50'	15.2 m		15	6
64816301			100'	30.5 m		13	4
67729001			25'	7.6 m	Black		12
64816901	12/3	SJTOW	50'	15.2 m			6
64817201			100'	30.5 m		15	4
64817501			25'	7.6 m		15	6
64817801	10/3		50'	15.2 m			4
64818101]		100'	30.5 m			3




AGRIPRO[™] 3-OUTLET OIL RESISTANT EXTENSION CORD



Agri-Pro[™] extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature Rating of -58°F to 221°F (-50°C to 105°C)
- 125 Voltage Rating
- Abrasion, Chemical and Oil Resistant
- Common Applications: Air Compressor, Chop Saw, Electric Chain Saw



* Lighted Banana Receptacle

SPECIFICATIONS


STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
54533501 * **	14/3	SJOW	15'	4.6 m	Black	15	18

AGRIPRO™ TRITAP OIL RESISTANT EXTENSION CORD



Agri-Pro[™] extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature Rating of -58°F to 221°F (-50°C to 105°C)
- 125 Voltage Rating
- Abrasion, Chemical and Oil Resistant
- Common Applications: Air Compressor, Chop Saw, Electric Chain Saw




STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2451	14/3	SJTOW	25'	7.6M	Black	15	12

12/3 FLAT CONVENSION CENTER CORDS



- Temperature Rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Flat cable construction makes it ideal for passing under carpets at temporary events



SPECIFICATIONS

*-40°F to 140°F (-40°C to 60°C) * 125V * Flat cable construction makes it ideal for passing under carpets at temporary events

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
64825001			15'	4.6 m			12
64828101	12/3	SJT	25'	7.6 m	Black	15	12
64828401]		50'	15.2 m			6

20A METAL POWER STRIPS





Heavy-Duty 20 Amp Metal Power Strip with 6' Cord has:

- Housing Made with Cold-Rolled Steel
- Receptacles Accept NEMA 5-15 Plugs
- Keyhole Mounting Template Included
- Electrical Specs: 125 VAC, 20 Amps, 2500 Watts

NEMA	NEMA
5-15R	5-15P

SPECIFICATIONS


STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	CORD LENGTH (FT)	CORD LENGTH (M)	AMPS	CASE PACK QUANTITY
5120	Southwire Heavy-Duty 20 Amp Metal Power Strip with 6' Cord	10/2	SJT	6'	1.8 m	00	4
5122	Southwire Heavy-Duty 20 Amp Metal Power Strip with 15' Cord	- 12/3		15'	4.6 m	20	

MAGNETIC METAL POWER STRIPS




Southwire Magnetic Power Strips are sure to be an attractive solution on the jobsite. Stick them to a metal surface and the 25+ pounds of pull force will hold in place with cords plugged in. Enhance jobsite safety by keeping electrical connections off the floor. Perfect for use with metal studs, tool boxes, I-beams, and more.

- Heavy-duty cold-rolled steel construction
- Rare Earth magnets with pull force of 25 pounds
- Lighted switch with integrated overload protection
- 6 Outlets (NEMA 5-15) with 2 spaced for large plugs



						-	
STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	CORD LENGTH (FT)	CORD LENGTH (M)	AMPS	CASE PACK QUANTITY
5126	Southwire 6-Outlet Magnetic Power Strip with 6' Cord		SJT	6'	1.8 m	15	
5127	Southwire 6-Outlet Magnetic USB Power Strip with 8' Cord	14/3		8'	2.4 m	- 15	4

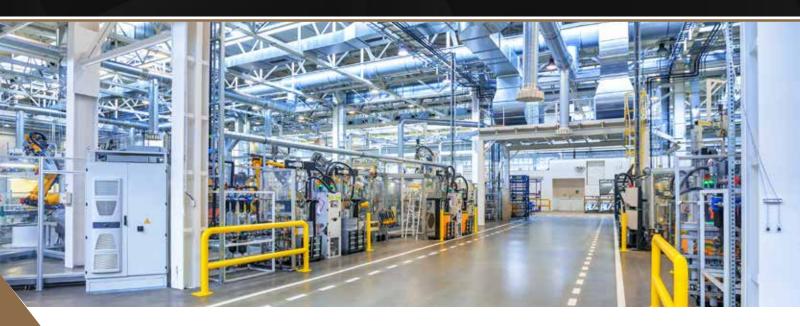

COILED CORDS

Coiled cords, also called retractile or Curly cords, consist of metal wires encased in a flexible, spiral jacket. The wires can be copper or aluminum, and the spiral jacket is usually made of an insulating material such as thermoset or thermoplastic resins like PVC. The material acts as a moisture barrier for the wires inside.

Coiled cords are used for many types of applications, including:

- Aeronautical
- Commercial
- Industrial
- Medical
- Military



125V INDOOR MAJOR APPLIANCE REPLACEMENT CORDS

98130008

- Temperature Rating of -58°F to 194°F (-50°C to 90°C)
- 300 Voltage Rating (SJEOW)
- 600 Voltage Rating (SEOW & SEOOW)



STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	VOLTS	CASE PACK QUANTITY
98090008	18/2							10
98100008	18/3	SJEOW				N/A	300	12
98110008	18/4		4-20'	1.2-6 m				10
98120008	16/2							10
98130008								10
12200008	16/3	SJEOOW	1-5'	0.3-1.52 m		13	125	6
12260008]	SJEUUW			Black	13	125	12
98140008	16/4	SJEOW	4.00				300	10
99110008	14/2	SEOOW	4-20'	1.2-6 m			c00	10
98150008		SEOW				N/A	600	5
98260008	14/3	SJEOW	1-5'	0.3-1.52 m]	IN/A	300	25
99120008	1	SEOOW	4.00	10.0 m	1		600	10
98160008	12/3	SEOW	4-20'	1.2-6 m				5

RANGE · DRYER · APPLIANCE · REPLACEMENT CORDS

Southwire offers a variety of in-home replacement cords providing multiple options for different plug configurations, and strain relief clamps help prevent cord damage.



RANGE AND DRYER CORDS

9014SW8809



- Temperature rating of -4°F to 140°F (-20°C to 60°C)
- 125/250 Voltage Rating

SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	NUMBERS OF WIRES	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	
9014SW8809	6/2-8/1	SRDT Flat	3	4'	1.2 m	Gray		6	(;)	
9016SW8809	0/2 0/1	ondirinat	3	6'	1.8 m	uluy	50	6	NEMA 10-50P	
9044SW8808	0/0.0/0		4	4'	1.2 m		-	6		
9046SW8808	6/2-8/2	SDRT Round	4	6'	1.8 m			6		
544094**	8/2-10/2		4	5'				40	8	NEMA
544147**	0/2-10/2		4	5'			40	15	14-50P	
544120* **	10/2	DRT	3	5'	1.5 m	Black	30	8	NEMA 14-30P	
544150*	10/2		3	5'			40	15	NEMA 14-50P	
9124SW8809	10/3	SDRT Flat	3	4'	1.2 m	Gray	30	6		
9126SW8809	10/3	SDRT Flat	4	6'	1.8 m	ulay	30	6	NEMA 10-30P	
9154SW8808	10/4		4	4'	1.2 m	Plaak	30	6		
9156SW8808	10/4	SDRT Round	4	6'	1.8 m	Black	30	6	NEMA 14-30P	

ELECTRIC OUTLET GAS RANGE ADAPTER 250V TO 125V

9042SW8801



- Converts a 220V Outlet to 120V
- Commonly used when installing an electric range where a gas range previously worked
- Helps avoid re-wiring an outlet in a home

STOCK #	COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
9042SW8801	White with Black Pull Handle	15	4	NEMA 14-50P	NEMA 5-15R

GARAGE & WORKSHOP REPLACEMENT POWER SUPPLY CORDS



- Temperature rating of:
 - SJEOW -58°F to 221°F (-50°C to 105°C)
 - SJT -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Electric Trimmer, Electric Chainsaw, Air Compressor



SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
9853SW0008	16/2	SJEOW	6'	1.8 m			50
9854SW0008	10/2		9'	2.7 m			50
98388808		SJT	2.5'	0.7 m		13	100
9855SW0008	16/3		6'	1.8 m			50
9856SW0008		SJEOW	9'	2.7 m	Black		50
9857SW0008	- 14/3	SJEUW	6'	1.8 m			25
9858SW0008	14/5		9'	2.7 m		15	25
90110008	12/3	12/3 SEOOW	2'	0.6 m	_	15	50
90120008	12/3	SECOW	2'	0.6 m			50

INDOOR ROUND REPLACEMENT POWER SUPPLY CORDS

9702SW8808



- Temperature Rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Vacuum, Electric Drill, Work Light



STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	
9702SW8808	16/2		6'	1.8 m				
9703SW8808			3'	0.9 m		10	25	
9706SW8808	16/3	SJTW	6'	1.8 m	Disel	13		
9709SW8808		SJIW	9'	2.7 m	Black			
9716SW8808	14/2		6'	1.8 m		16		
9719SW8808	- 14/3		9'	2.7 m		15		

INDOOR FLAT REPLACEMENT POWER SUPPLY CORDS



- Temperature Rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage Rating
- Common Applications: Microwave, Refrigerator, Dehumidifier




STOCK #	GAUGE CONDUCTOR	WIRE TYPE	NUMBERS OF WIRES	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
9723SW8809			Right Angle	3'	0.9 m			
9733SW8809			Straight	3'	0.9 m			
9724SW8809	16/3		Right Angle	4'	1.2 m	Grov	13	
9734SW8809	10/3		Straight	4'	1.2 m	_ Gray 		
9726SW8809			Right Angle	6'	1.8 m			
9736SW8809			Straight	6'	1.8 m			
9743SW8823		SPT-3	Straight	3'	0.9 m	Beige		25
9743SW09	14/3		Straight	3'	0.9 m	Gray	15	
9746SW8823]		Straight	6'	1.8 m	Beige]	
98700009	12/3		Right Angle	6'	1.8 m	Beige		

125V INDOOR MAJOR APPLIANCE REPLACEMENT CORDS



- Temperature Rating of -4°F to 140°F (-20°C to 60°C)
- 125 Voltage Rating (250 Voltage Rating for 3537SW8809)
- Common Applications: Air Conditioner, Space Heater, Refrigerator



SPECIFICATIONS


STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3531SW3323			3'	0.9 m	Beige		36
3531SW09			3'	0.9 m	Gray		24
3532SW3323			6'	1.8 m	Beige		24
3532SW09	14/3	SPT-3	6'	1.8 m	Gray	15	24
3533SW3323			9'	2.7 m	Beige		15
3535SW3323			12'	3.7 m	Beige		12
3536SW3323			15'	4.6 m	Beige]	12

250V INDOOR MAJOR APPLIANCE REPLACEMENT CORDS

3537SW8809



- Temperature Rating of -4°F to 140°F (-20°C to 60°C)
- 125 Voltage Rating (250 Voltage Rating for 3537SW8809)
- Common Applications: Air Conditioner, Space Heater, Refrigerator



* (*6-20 P/R)

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3537SW8809*	12/3	SPT-3	9'	2.7 m	Gray	20	18

CORD MANAGEMENT & REELS

Southwire's cord organization options for keeping bulky extension cords, ropes, and holiday lighting tangle free.



CORD ORGANIZATION CORD STORAGE WRAPS



SPECIFICATIONS

STOCK #	DESCRIPTION	HOLDS	COLOR	CASE PACK QUANTITY
3202	Resin Cord Wrap With Stand	100' of 14/3 Gauge Cord	Yellow	10
247737	Resin Cord Wrap With Integrated Tritap Adapter	50' of 14/3 Gauge Cord	Black	3
2803	Black, Mountable H-Frame Extension Cord Reel	100' of 16/3 gauge cord	Black	12
E101	Yellow, Mountable Cord Storage Extension Cord Reel	100' of 16/3 gauge cord	Yellow	24
64788201	Black Cord Caddy H-Rack Tray Pack	50' of 14/3 gauge cord	Black	24

CORD STORAGE REEL



SPECIFICATIONS

STOCK #	DESCRIPTION	HOLDS	COLOR	CASE PACK QUANTITY
E230*	Resin Reel With Metal Stand And Four Grounded Outlets	50' of 12/3 Gauge Cord	Black/Yellow	4
547702	Extension Cord Storage Wheel	6' Of 14/3 Gauge Cord	Black	8
E102	Extension Cord Storage Reel	150' Of 16/3, 125' Of 14/3, And 75' Of 12/3	Red/Black	8
E103	Extension Cord Storage Wheel	Holds 125' Of 14/3 Gauge Cord	Red/Black	4
22849*	Extension Cord Reel With Metal Stand	Holds 100' Of 14/3 Gauge Cords	Black	6

*with metal stand

CORD REELS



STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	CASE PACK QUANTITY
E235	Power Station Cord Reel With Metal Stand, 6 Grounded Outlets, And On Off Switch And Built In Circuit Breaker	14/3	SJTW	50'	15.2 m	Red/Black/ Yellow	2
445825**	Portable Cord Cady With Handle And Tritap Receptacle	14/3	SJTW	50'	15.2 m	Black	3
E238	Power Station Cord Reel With Metal Stand, 6 Grounded Outlets, And On Off Switch And Built In Circuit Breaker	12/3	SJTW	50'	15.2 m	Green/Black/ Yellow	2
E231	Retractable Extension Cord Reel, 4 Grounded outlets and On Off switch	16/3	SJTW	20'	6.1 m	Black/Yellow	6
2801	Portable Extension Cord Reel Power Station, 4 Grounded Outlets	16/3	SJT	25'	7.6 m	Black/Yellow	3
4907	Extension cord Reel with 4 Grounded Outlets	16/3	SJTW	25'	7.6 m	Black/Yellow	4
545794	Cord Caddy Self-Storing Extension Cord with 4 Grounded Outlets	16/3	SJTW	32.81'	10 m	Orange	6

RETRACTABLE CORD REELS WITH LIGHTED TRITAP



SPECIFICATIONS

*Black End ^Banana Plug

STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	OUTLETS	AMPS	CASE PACK QUANTITY
E315	Retractable Extension Cord Reel	16/3	SVT	20'	6.1 m	Black/Yellow	3	13	4
E215^	Metal Retractable Extension Cord Reel With Lighted End	16/3	SJT	30'	9.1 m	Silver/Black	3	13	2
48006SW*	Metal Retractable Extension Cord Reel	14/3	SJTW	30'	9.1 m	Red/Black	3	15	3
E316	Retractable Extension Cord Reel With Lighted End	14/3	SJTW	45'	13.7 m	Green/Black	3	15	2
48208802SW	Retractable Extension Cord Reel With Lighted End	12/3	SJTW	50'	15.2 m	Black/Yellow	3	13	1

RETRACTABLE CORD REEL WITH WORK LIGHT

E216





STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	OUTLETS	AMPS	CASE PACK QUANTITY
E216	Retractable Extension Cord Wheel With Work Light	16/3	SJTW	20'	6.1 m	Yellow/Black	1	13	4
48000	Metal Retractable Extension Cord Wheel With Trouble Light	16/3	SJTW	40'	12.1 m	Red/Black	1	13	3

RETRACTABLE CORD REEL WITH LOCKING PLUG



SPECIFICATIONS

STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	OUTLETS	AMPS	CASE PACK QUANTITY
48004	Metal Retractable Extension Cord Wheel With Locking Plug	14/3	SJTW	30'	9.1 m	Red/Black	1	15	3

INDUSTRIAL RETRACTABLE CORD REELS







STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	OUTLETS	AMPS	CASE PACK QUANTITY
R112318845	12/3		SJEOW 45'	13.7 m	Yellow/Black	1	- 20	1
R112718845*		SJEOW				2		
R112308845						1	15	



Southwire[™] CORD Southwire CORD SOUTIONS CATALOG

GET SOCIAL WITH US:











SOUTHWIRE.COM | 1-855-SWTOOLS

All Trademarks or Registered Trademarks (TM/®) are owned or licensed by Southwire Company. Any other ™/®- Trademark or Registered Trademark of Southwire Company.