### Gas Mixer

# RMV-55-ZXX and RM-55

#### **Product Features**

- Variable Zeppelin
- Variable Venturi
- Various Zeppelin sizes available
- Accurate gas metering
- Fast response to load transient
- CAN Communication (cominbend with AF-2000)
- Automatic and Manual drive
- RM-55/RMV-55 40 to 60 litre engine displacement
- Status indication as position feedback

#### Advantage

- 12 and 24 VDC
- IP-67 Protected
- High temperature real contactless position feedback
- Variable Geometry
- Controllable, via: CAN, 0-10 VDC or 4-20mAmp
- Mounting flange for gas tube is removable for easy external mounting and service
- Has two mounting flanges
- Zeppelin can be swapped without removing the mixer from the engine

### WITH VARIABLE VENTURI-GEOMETRY



### Precise air gas metering

The RMV Mixer is an enhanced sophisticated Air Gas blender based on the approved ring gap principal.

Due to a precise HT-mechanical gear system an accurate Lambda control tolerance smaller than +/- 0.01 is guaranteed.

It can be used for different type of engines. Via CAN, 0-10VDC or 4-20mAmp the mixer can be easily controlled. In combination with the Cuteline Mixer Module it unleashes a powerful way of controlling the air fuel ratio.


Engineering and design has achieved a level which allows using the mixer for Natural, Bio and other gas application. Robustness and environmental protection makes this mixer unique and extremely user friendly.

CAN Bus communication allows flexibility together with HT-DST4602 and the AF-Series control system and cost savings for additional I/O's.



#### **Dimensions RM-55**

**RMV-55 Series** 

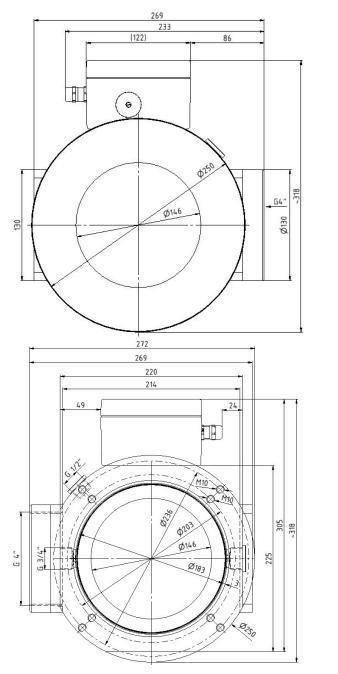

Mating Harness for RM-55: CH-RM-LX (X= Define length) Normally 4 or 7 meter available otherwise specify length


If CL Mixer Version is used:

Appropriate Driver Module: No additional driver required, can be driven directly with below mentioned modules.

Appropriate Air Fuel Ratio Controller: HT-CL-AF-1000-LS or HT-CL-AF-1500-P or AF-2000



#### **Mixer Assembly**

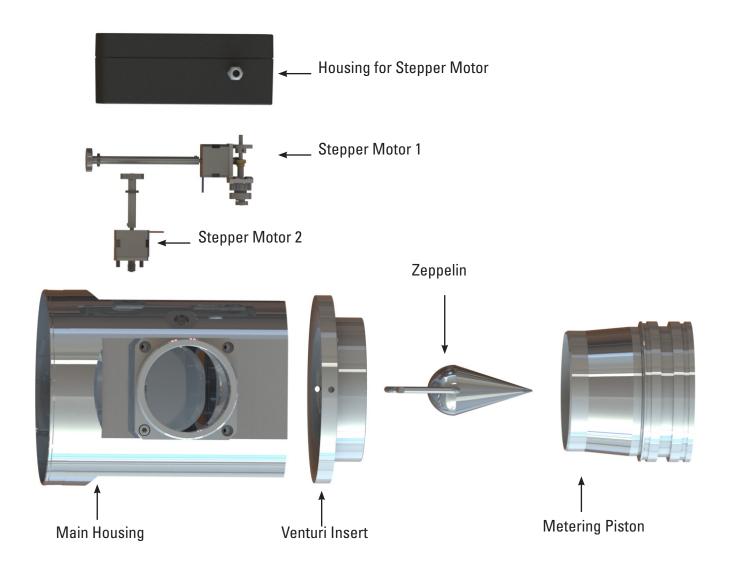




### **Gas Mixer**

#### 3-D View RM-55

RMV-55 Series




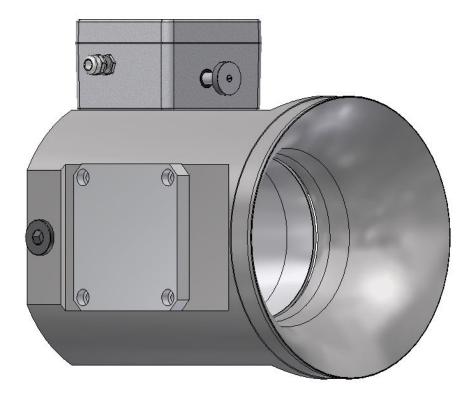




**RMV-55 Series** 

#### Dimensions RMV-55-ZXX

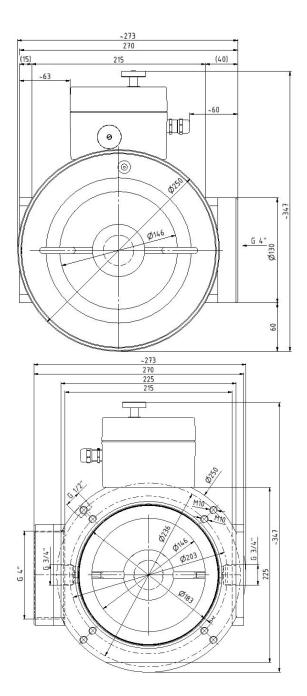

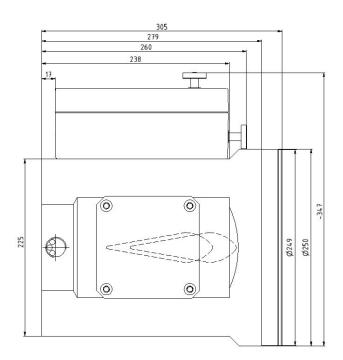

Mating Harness for RMV-55-ZXX: CH-RMV-Z-LX (X= Define length) Normally 4 or 7 meter available otherwise specify length

Appropriate Driver Module: HT-CL-MIXRMV, controls both motors. Appropriate Air Fuel Ratio Controller: HT-CL-AF-1000-LS or HT-CL-AF-1500-P or AF-2000

Zeppelin diameter 65mm. Other diameter available



### **Gas Mixer**

## **RMV-55 Series** 3-D View RMV-55-ZXX • )D ()))))))) Ø 0 O 00 Ô R 0

Local Distributor / Partner:



HUEGLI TECH AG (LTD) Murgenthalstrasse 30 4900 Langenthal Switzerland Phone: +41 62 916 50 30 Fax: +41 62 916 50 35

e-mail: sales@huegli-tech.com www.huegli-tech.com RMV-40\_DS\_EN\_05.2018 © HUEGLI TECH Features and specifications are subject to change without prior notice