


**Preventing the unnecessary escape of volatile vapors will help profits grow.**

The Tokheim No. 80-2" Control Valve is a condensing unit built for the exacting requirements of maintaining the proper atmosphere in various tanks. Some common applications include: petroleum products, chemical and beverage tanks, and wet grain storage bins.

The main body and cover are sturdy gray iron and are protected with a high-quality weatherproof enamel. The cover can be locked with a padlock or sealed with a box-car seal.

The body is tapped for standard 2" pipe for connecting to the bin. The control valve base is protected with a heavy galvanized screen.

The two aluminum valves are lapped to the valve seats and tested to insure complete control of incoming and outgoing air. The valves are weighted for exact pressure desired.

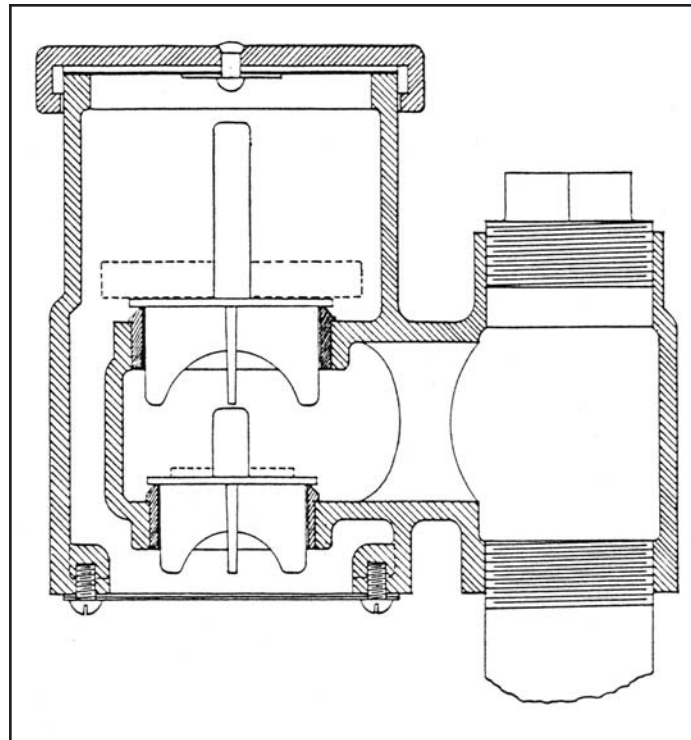

**Other Options**

The No. 80 Control Valve may be retrofitted with our No. 85-2" Flame Arrester.

The Tokheim No. 185 Series Combination Flame Arrester and Pressure-Vacuum Valve is available in 2-, 4-, 6-, 8-, and 10-inch pipe sizes.

**Ordering Information**

When ordering, please specify pressure and vacuum settings desired. The most popular setting is 5 oz. pressure and 2 oz. vacuum.

Range of settings available:  
Pressure: 1/2 oz. to 9 oz.  
Vacuum: 1/2 oz. to 3-1/2 oz.

Shipping weight is 20 lbs. each.

The Tokheim Company • 560 31st Street • Marion, Iowa 52302 • (319) 362-4847 • Fax (319) 362-4229

[www.tokheimco.com](http://www.tokheimco.com) • [info@tokheimco.com](mailto:info@tokheimco.com)

**Manufacturers of Quality Storage Tank Equipment Since 1898.**

- Aboveground Tank Gauges
- Underground Tank Gauges
- Guided Float Kits
- Pressure-Vacuum Vents (2, 4, 6, 8, & 10 inch sizes)
- Flame Arresters (2, 3, 4, 6, 8, & 10 inch sizes)
- Combination Units of Flame Arrester & Pressure-Vacuum Vent (2, 4, 6, 8, & 10 inch sizes)
- Sampling Pumps
- Overfill Alarms