GOMAN Tracked Boom Lift X12




Lift X12 (GX39) www.gomanlift.com


Lift X12 (GX39)


Standard Parameters


Model	X12	GX39
Max. work height	12.00m	39′
Max. platform height	10.00m	33′
Load capacity	200kg	441lb
Max. working radius	5.8m at 200kg	19' at 441 lbs
	7.5m at 80kg	24.6' at 176 lbs
Size of platform	1.4*0.7*1.1m	
	55" x 28"x 43"	
Overall stowed length	3.93m	155"
Overall stowed length	3.20m	126"
(remove basket)	5.20111	120
Overall stowed width	1.15m	45"
Overall stowed height	1.98m	78"
Total weight	2920kg	6437lb
Driving speed km/h	0-4.0	
Max. work slope	15°	
Max. climbing ability	30%	
Standard Power	Battery 24V 225Ah +	
(Dual Power)	Gas engine Vanguard 14hp	

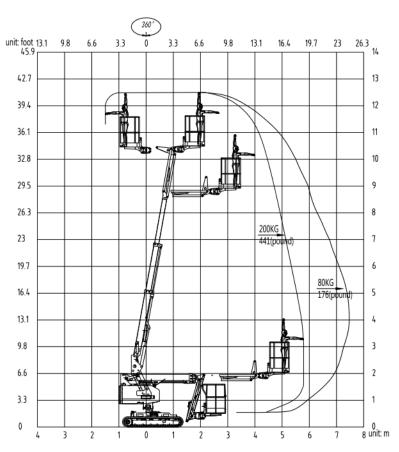

Machine dimensions











Lift X12 (GX39) www.gomanlift.com

Working Scope

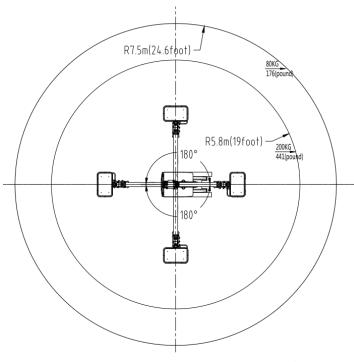

Working Slope

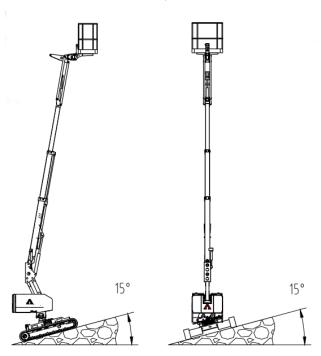



Standard Features

- ► Hybrid power (gas engine + battery)
- ► Compact design for indoor and outdoor use
- ► Gravity lowering (emergency lowering)
- ► Wireless remote control for all movement
- ► Load sensor and self-leveling basket
- ► Double axle adjustment allowing work in slope
- ► Adjustable black rubber crawlers for narrow access
- ► Plug control panel in basket
- ▶ 360° non-continuous turntable rotation
- ► Made of high tensile steel
- ► Reach standards of ISO, CE and ANSI

Lift X12 (GX39) www.gomanlift.com