

The Mod Shop

!!! IMPORTANT!!!


!!Keep and refer to this when cleaning disks!!

Cleaning Process:

To clean your Mod Shop exhaust system disks, remove the 6 screws at the back with an allen wrench. Take the disks and end cap and soak them in warm water for 15 minutes and then brush/wipe off the dirt. When **assembling**, take the disks and **line up** the **Supertrapp** lettering that is stamped in the disks. Disks might have some **imperfections**. **Line up all imperfections** so they are the same. Imperfections can be on the **outside or inside of disks**. Set disks onto counter once all aligned up and **If the stack of disks are angled/leaning** to the one side then **take half the stack of disks and rotate half a turn until the supertrapp lettering is aligned with the ones on the other disks**. If they are not angled/leaning then leave them alone.



Line up all the supertrapp lettering with each disk like the picture above

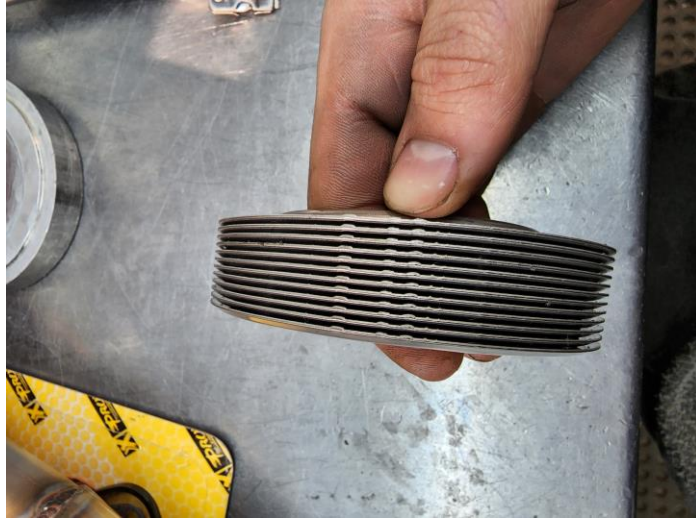

The picture above shows what the imperfections look like if there are any on the outside of the disks. If the disks don't have any of these bumps on the outside of them, then look on the inside of the disks for the indent like shown in the picture below. All disks will have the indent on them, located on the inside of the disk by the supertrapp lettering





Pictures above show the indent on the inside of the disk by the supertrapp lettering.

Set Disks onto counter once all **aligned up** and if the **stack of disks** are **angled/leaning** to the one side then **take half the stack of disks** and **rotate half a turn** until the **supertrapp lettering** is **aligned with the ones on the other disks**. If they are not angled/leaning to one side then leave them alone.

Make sure to install the disks the correct way onto the muffler. The dish side needs to face outwards. The picture on the next page shows the correct way to install on the muffler.



Use high temperature anti-seize on the bolts and cover all the threads with the anti-seize. **Torque bolts to 15in-lbs.** Tighten in **criss cross pattern** a little bit at a time to tighten evenly.

If you have questions give us a call at 780 538 3602.