

SWR-U SERIES

WALL/TRIM REVEALS

SAMPLE SPECIFICATION


specify as: SOFTFORMS® Model # SWR-XXXU-XXX

Pittcon SOFTFORMS® LLC

6409 Rhode Island Avenue
Riverdale, MD 20737
(800) 637-7638
(301) 927-1000
Fax: (301) 699-8690

3330 W. Flower Street
Phoenix, AZ 85017
(800) 637-7638
(602) 233-9100
Fax: (602) 233-9400

The extruded aluminum profile shall incorporate a continuous integral fin for surface contact to conventionally installed gypsum drywall. The fins shall be 7/8" wide and shall be tapered to the edge. The tapered fins shall be punched with holes staggered to accept standard screw fastening. A series of continuous grooves shall be extruded into the face of the fins to provide greater bonding surface. The extruded profiles shall be primed with corrosion-resistant primer compatible with materials normally in use in conjunction with commercial interiors, i.e.: joint compound, latex and enamel paints, and wall covering adhesives.

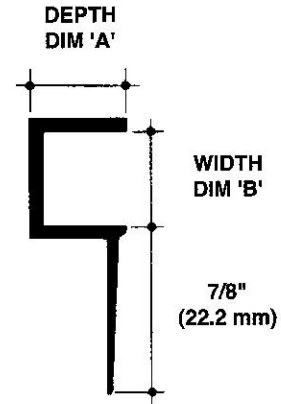

MATERIAL: Aluminum alloy.....6063 T5 or equal
Finish.....Factory primed


SWR-U SERIES
NO SCALE

WALL/TRIM REVEAL
TYPICAL SECTION

SELECTING YOUR SOFTFORMS® SWR-U WALL REVEAL SERIES OF ALUMINUM EXTRUSIONS

Select proper SOFTFORMS extrusion from the models shown below.

SWR Model No.	Width	Depth
SWR-025U-025	1/4" (6.4 mm)	1/4" (6.4 mm)
SWR-038U-038	3/8" (9.5 mm)	3/8" (9.5 mm)
SWR-013U-050	1/8" (3.2 mm)	1/2" (12.7 mm)
SWR-025U-050	1/4" (6.4 mm)	1/2" (12.7 mm)
SWR-038U-050	3/8" (9.5 mm)	1/2" (12.7 mm)
SWR-050U-050	1/2" (12.7 mm)	1/2" (12.7 mm)
SWR-063U-050	5/8" (15.9 mm)	1/2" (12.7 mm)
SWR-075U-050	3/4" (19.1 mm)	1/2" (12.7 mm)
SWR-100U-050	1" (25.4 mm)	1/2" (12.7 mm)
SWR-150U-050	1-1/2" (38.1 mm)	1/2" (12.7 mm)
SWR-200U-050	2" (50.8 mm)	1/2" (12.7 mm)
SWR-025U-063	1/4" (6.4 mm)	5/8" (15.9 mm)
SWR-038U-063	3/8" (9.5 mm)	5/8" (15.9 mm)
SWR-050U-063	1/2" (12.7 mm)	5/8" (15.9 mm)
SWR-063U-063	5/8" (15.9 mm)	5/8" (15.9 mm)
SWR-075U-063	3/4" (19.1 mm)	5/8" (15.9 mm)
SWR-100U-063	1" (25.4 mm)	5/8" (15.9 mm)
SWR-150U-063	1-1/2" (38.1 mm)	5/8" (15.9 mm)
SWR-200U-063	2" (50.8 mm)	5/8" (15.9 mm)
SWR-300U-063	3" (76.2 mm)	5/8" (15.9 mm)

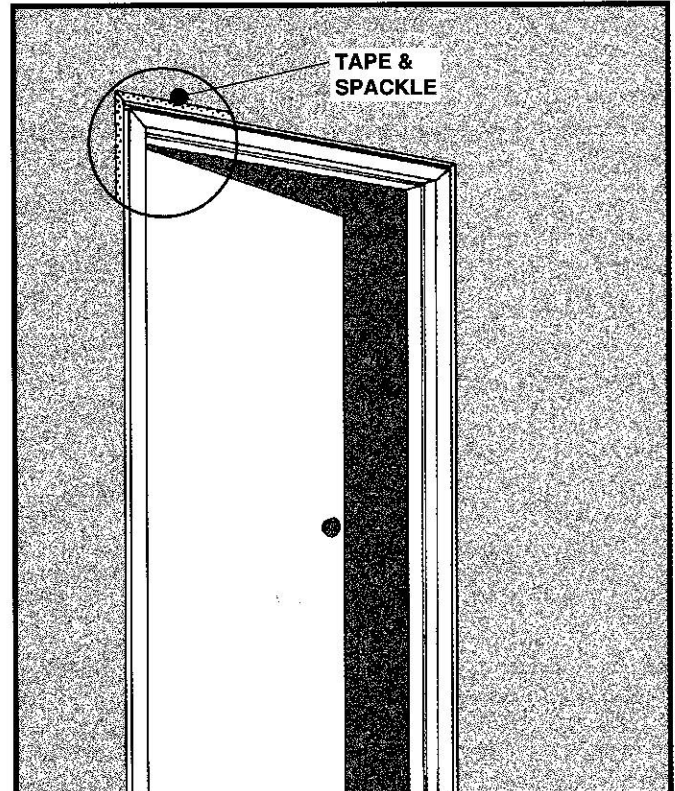

All details, methods and specifications are the exclusive property of Pittcon Softforms® LLC. Pittcon reserves the right to change any specifications or details without prior notification. All Softforms® profiles are available in standard 10' lengths $\pm 1/8"$ (2.048 M). Other lengths are available as special order items. For custom shapes, sizes, or for special finishes, please contact the factory or your nearest Pittcon sales representative.

© 2005 Pittcon SOFTFORMS® LLC.

Softforms

PREFORMED ARCHITECTURAL PROFILES
FOR DRYWALL CONSTRUCTION

SR 13