
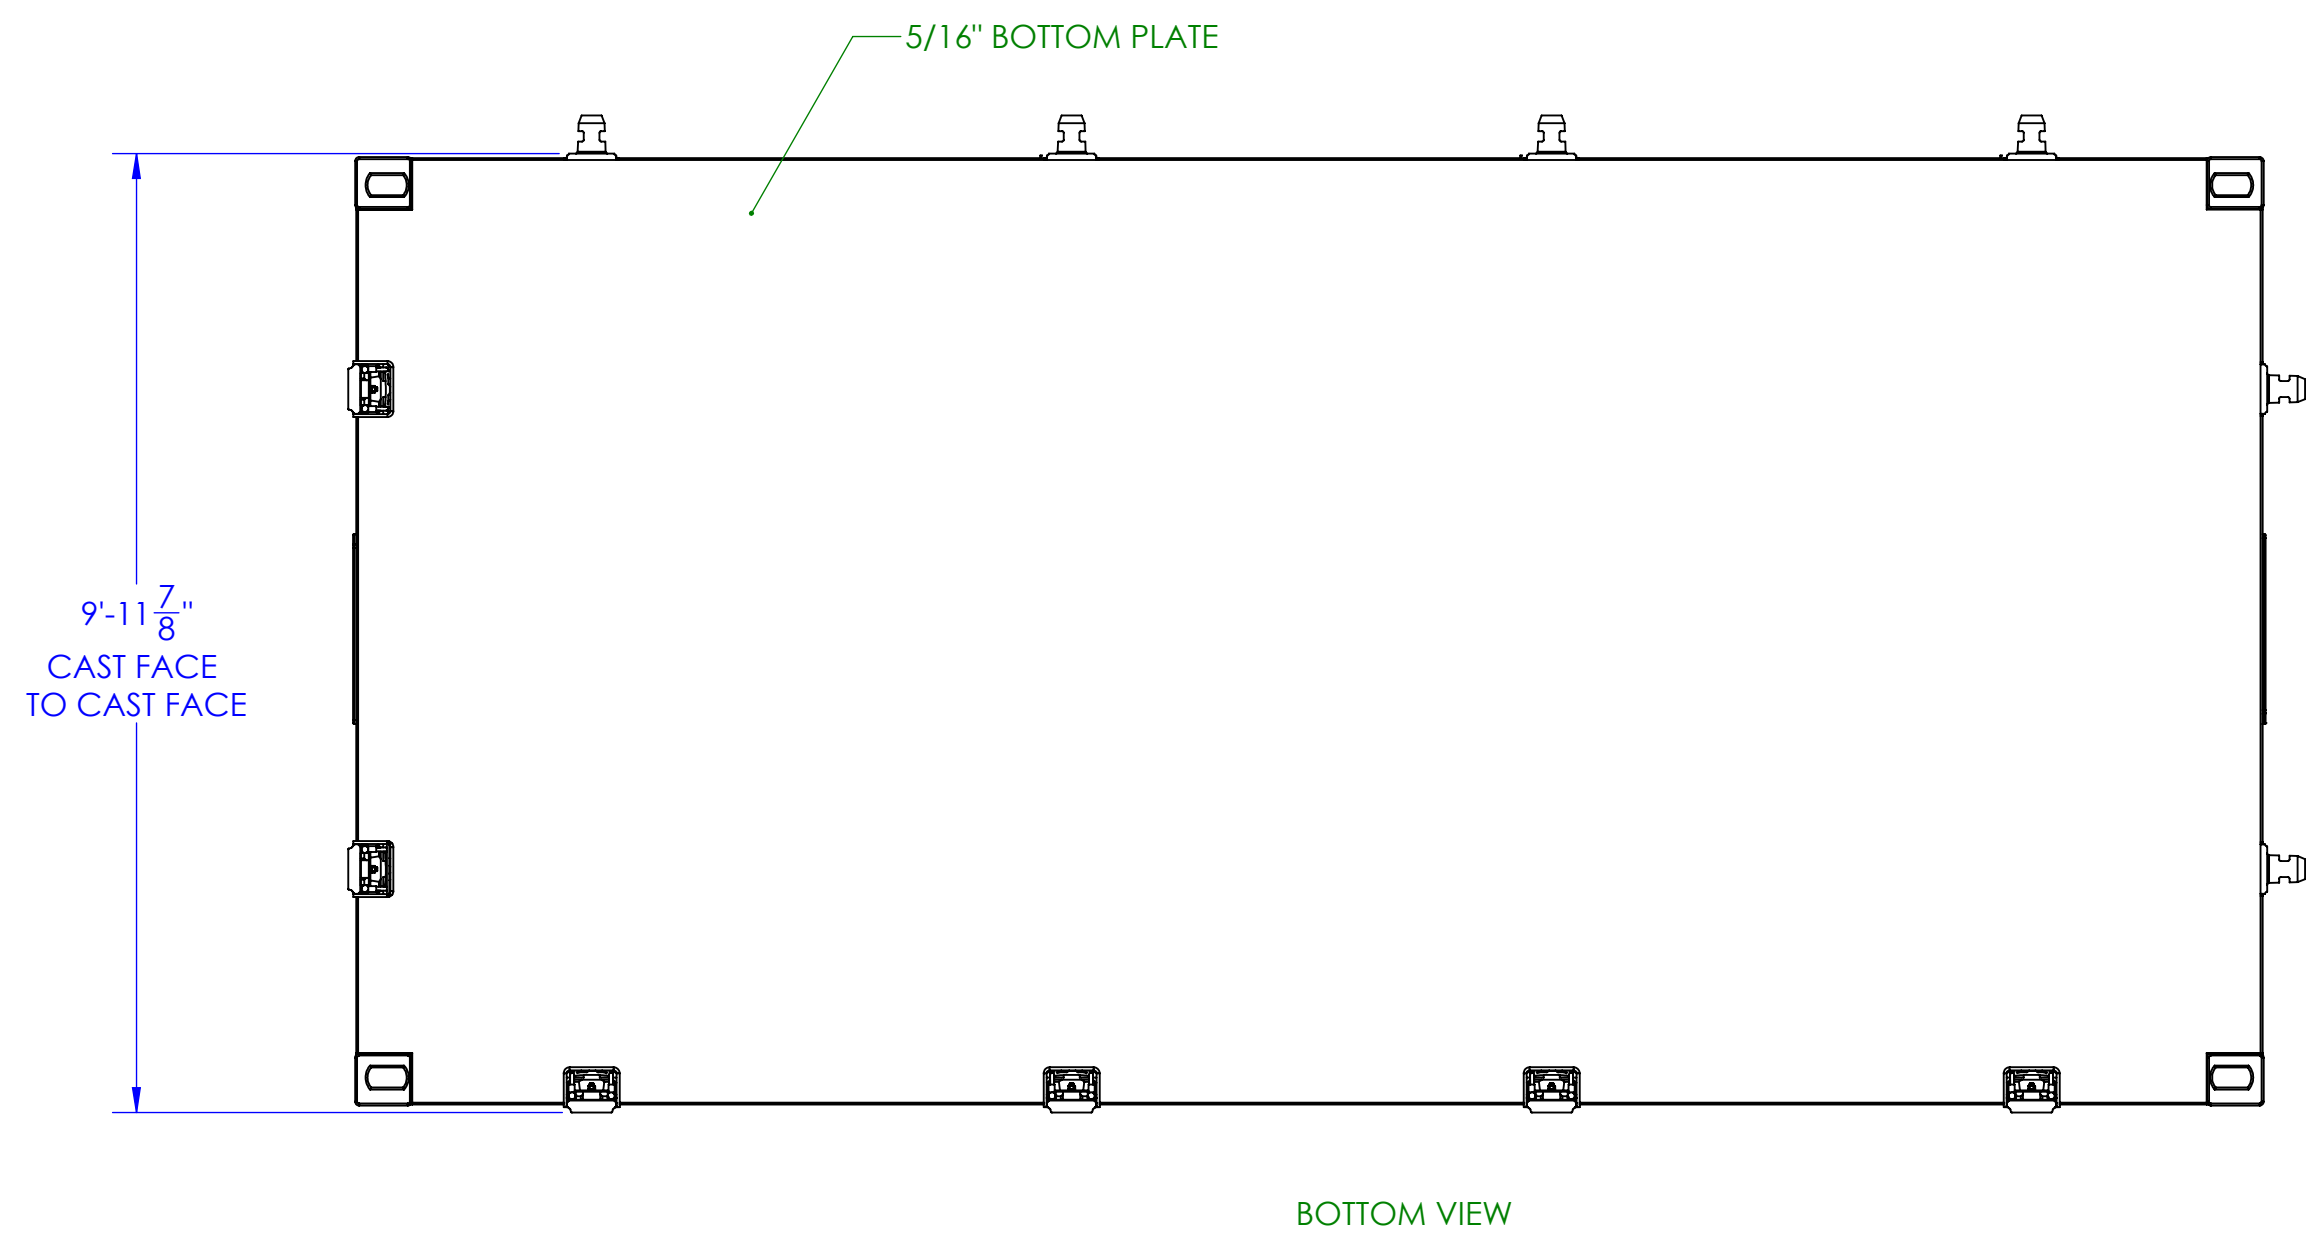
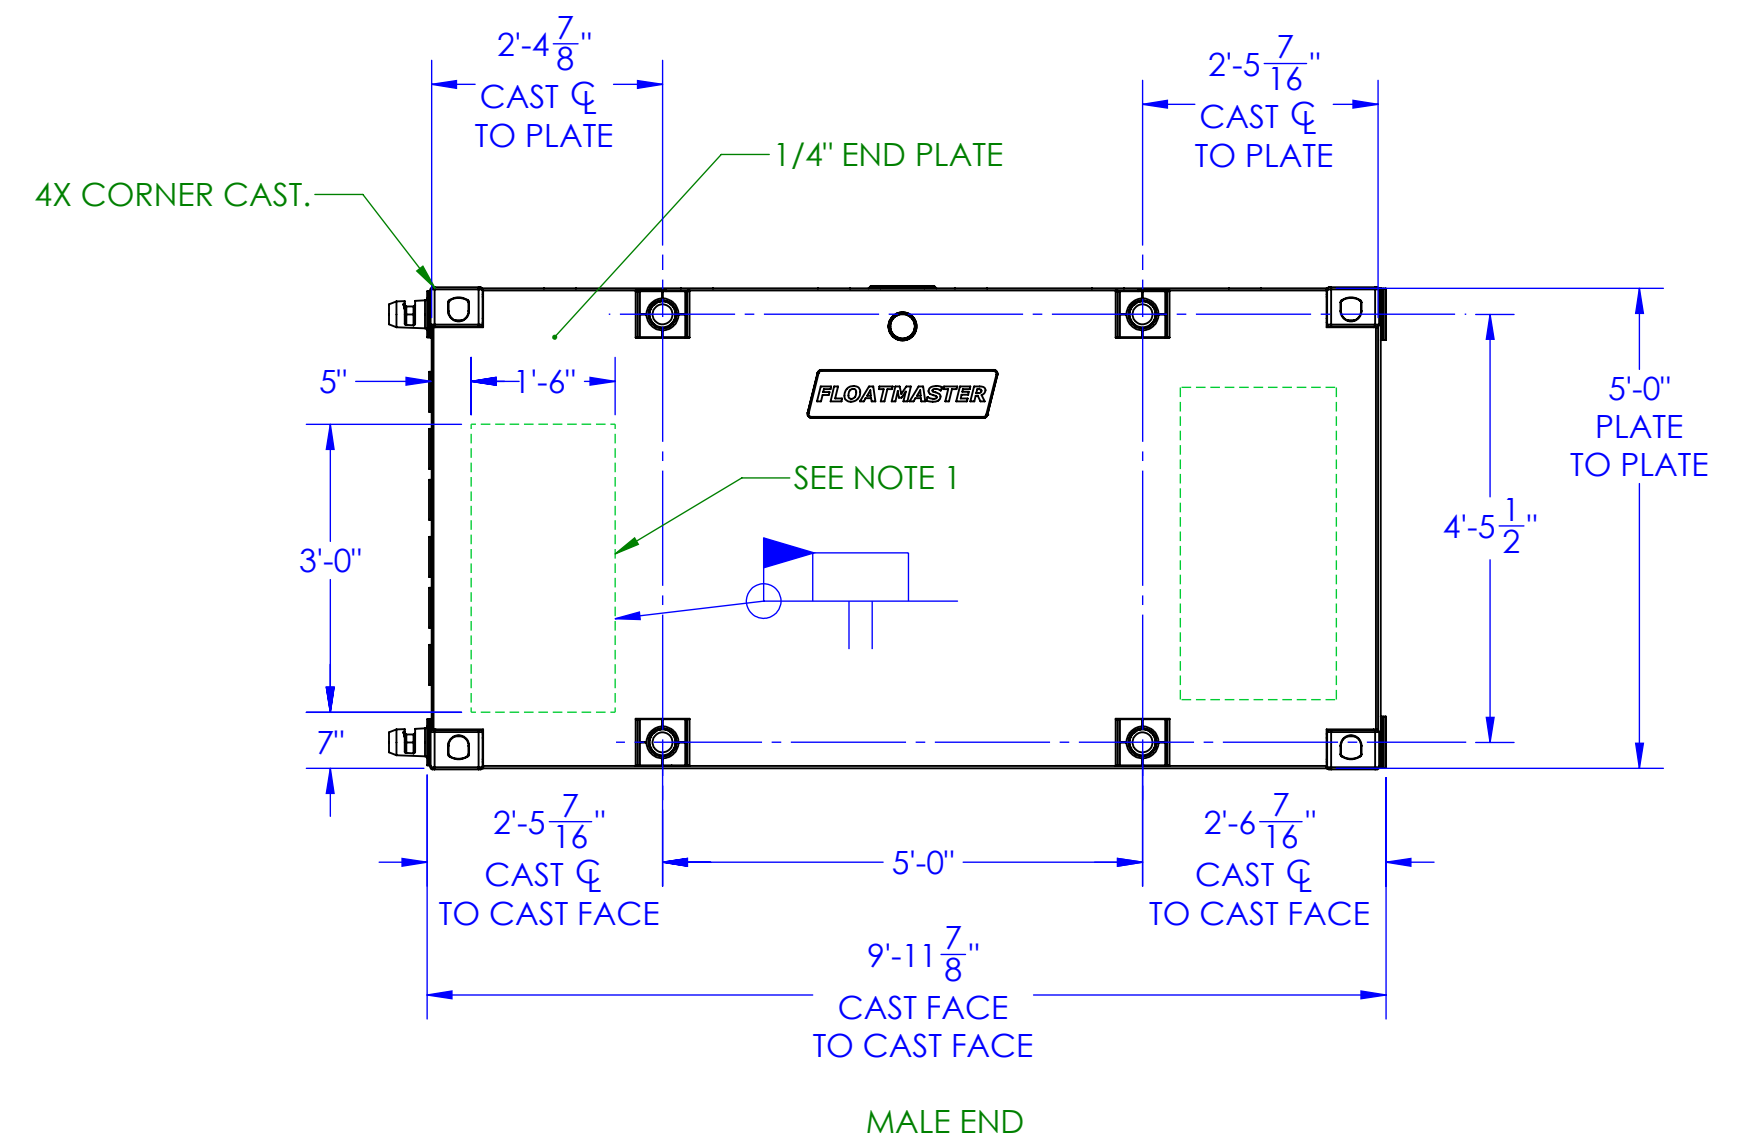
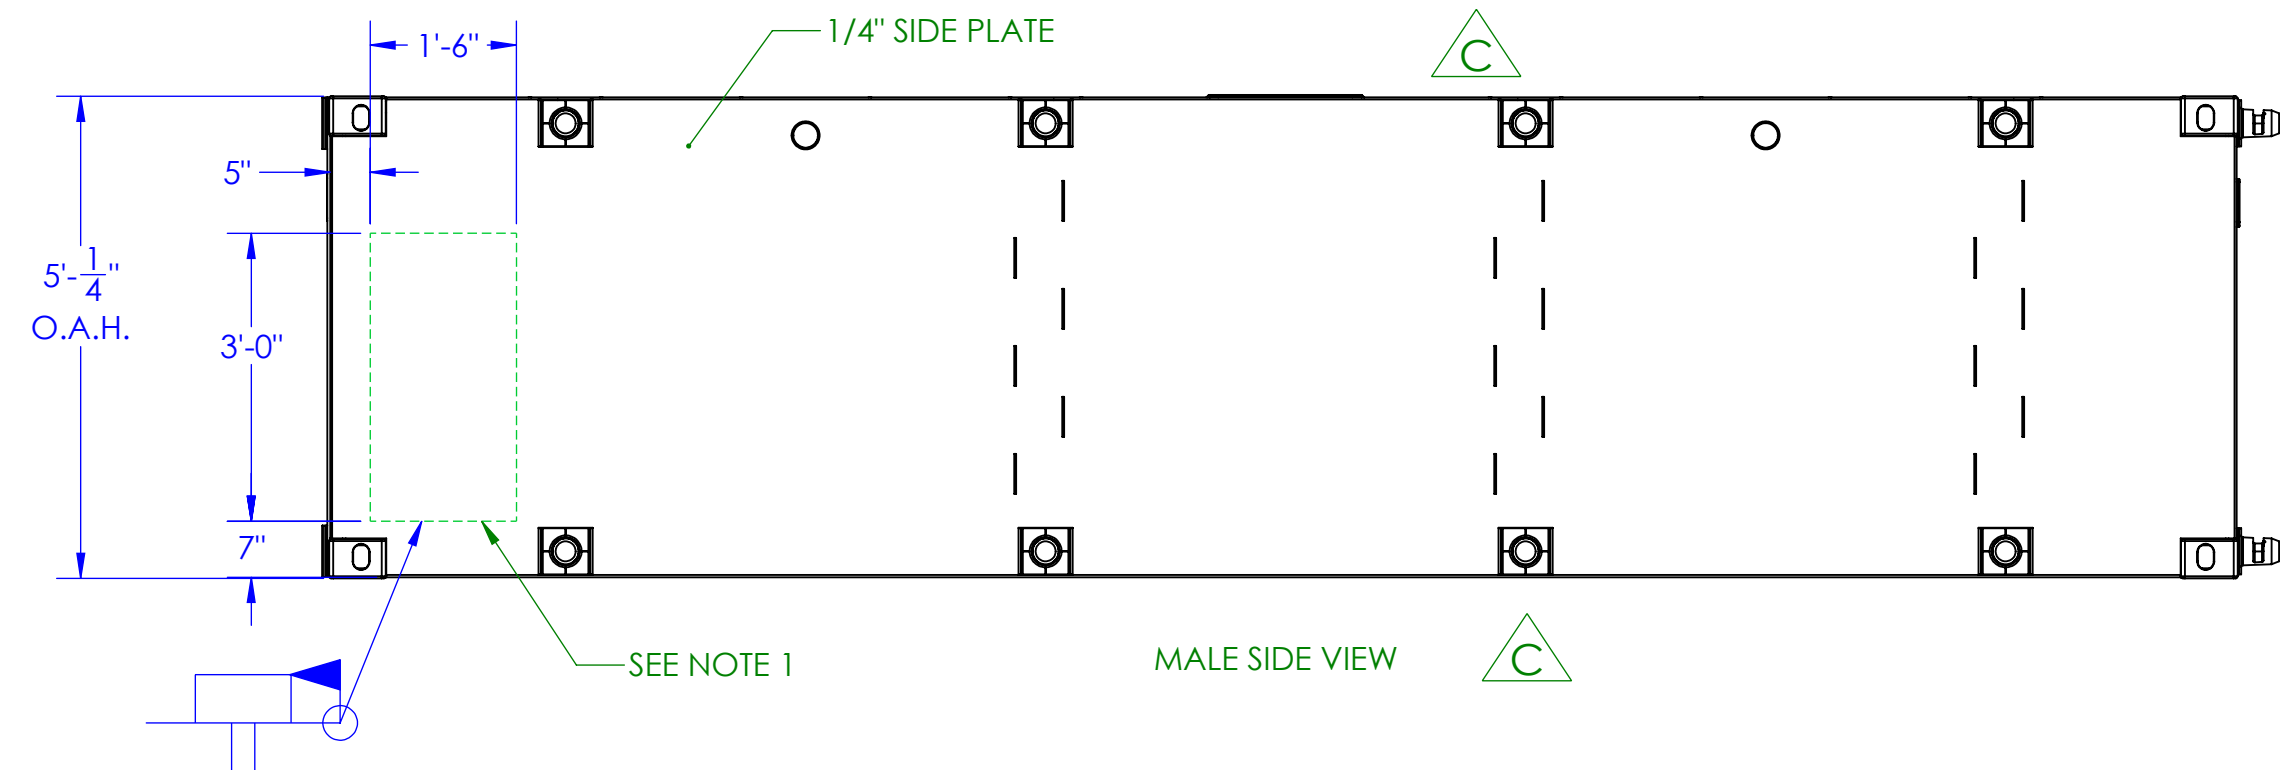
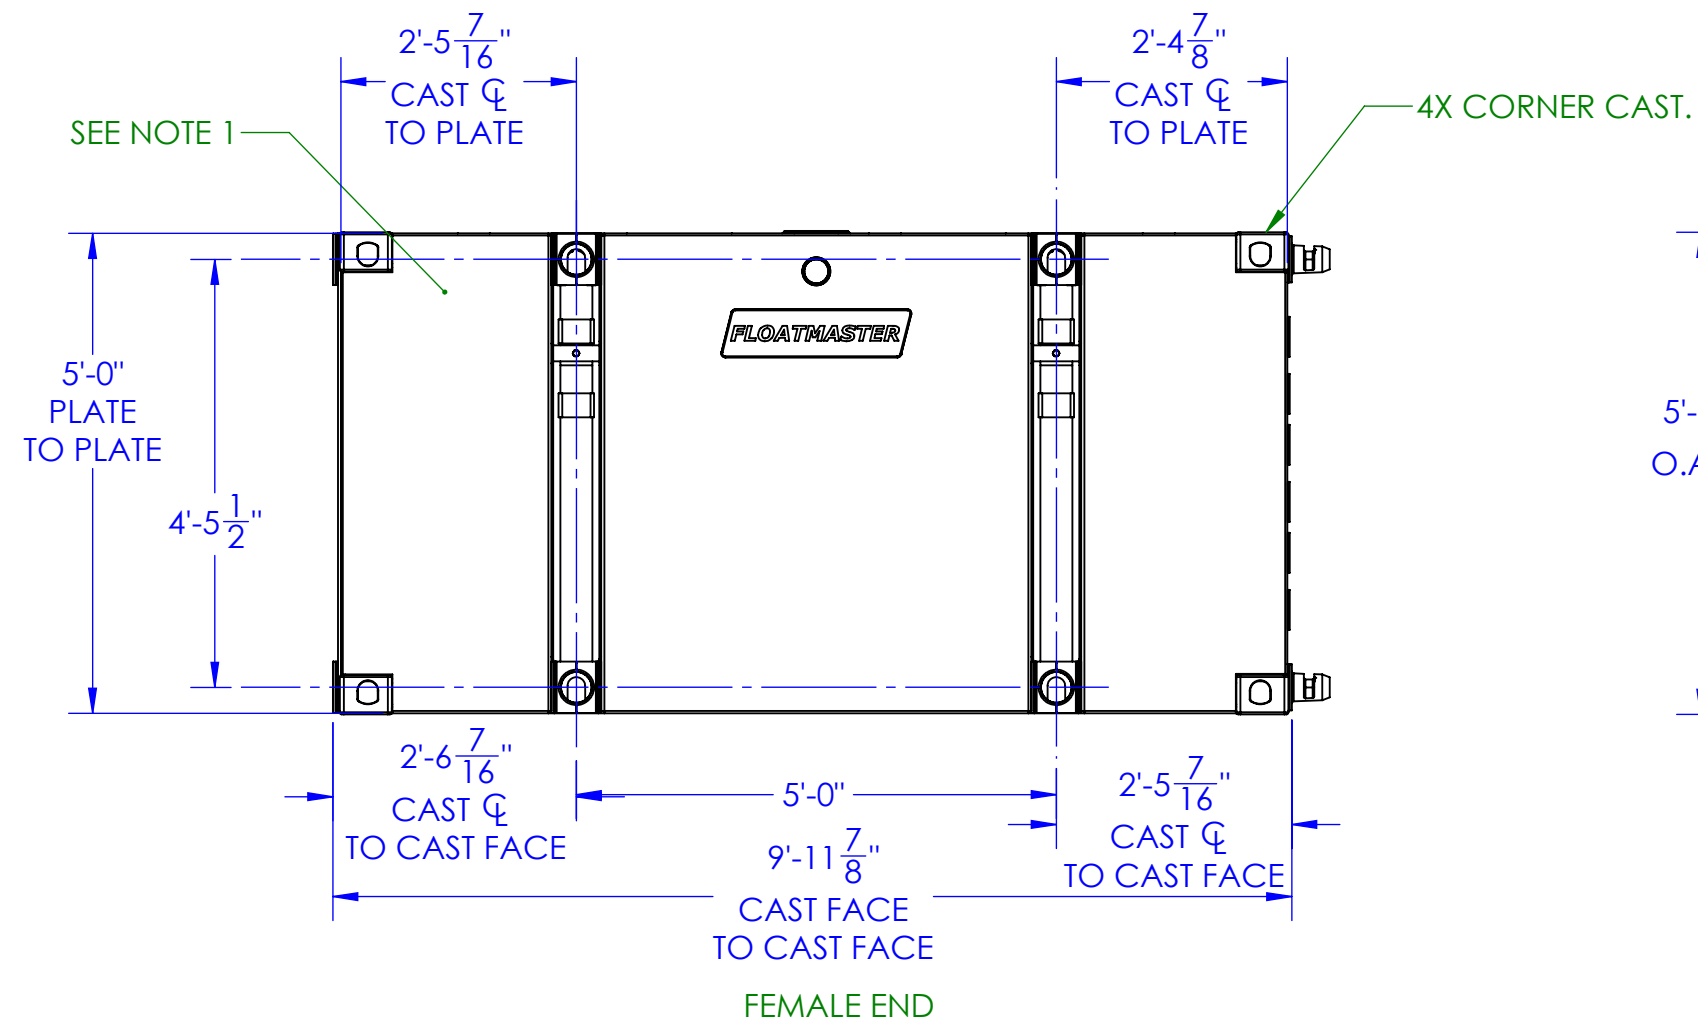


REVISION				
DRN	ECR	CHK	SV	REV
06/12/2026	07/28/2026	07/28/2026	07/28/2026	260033

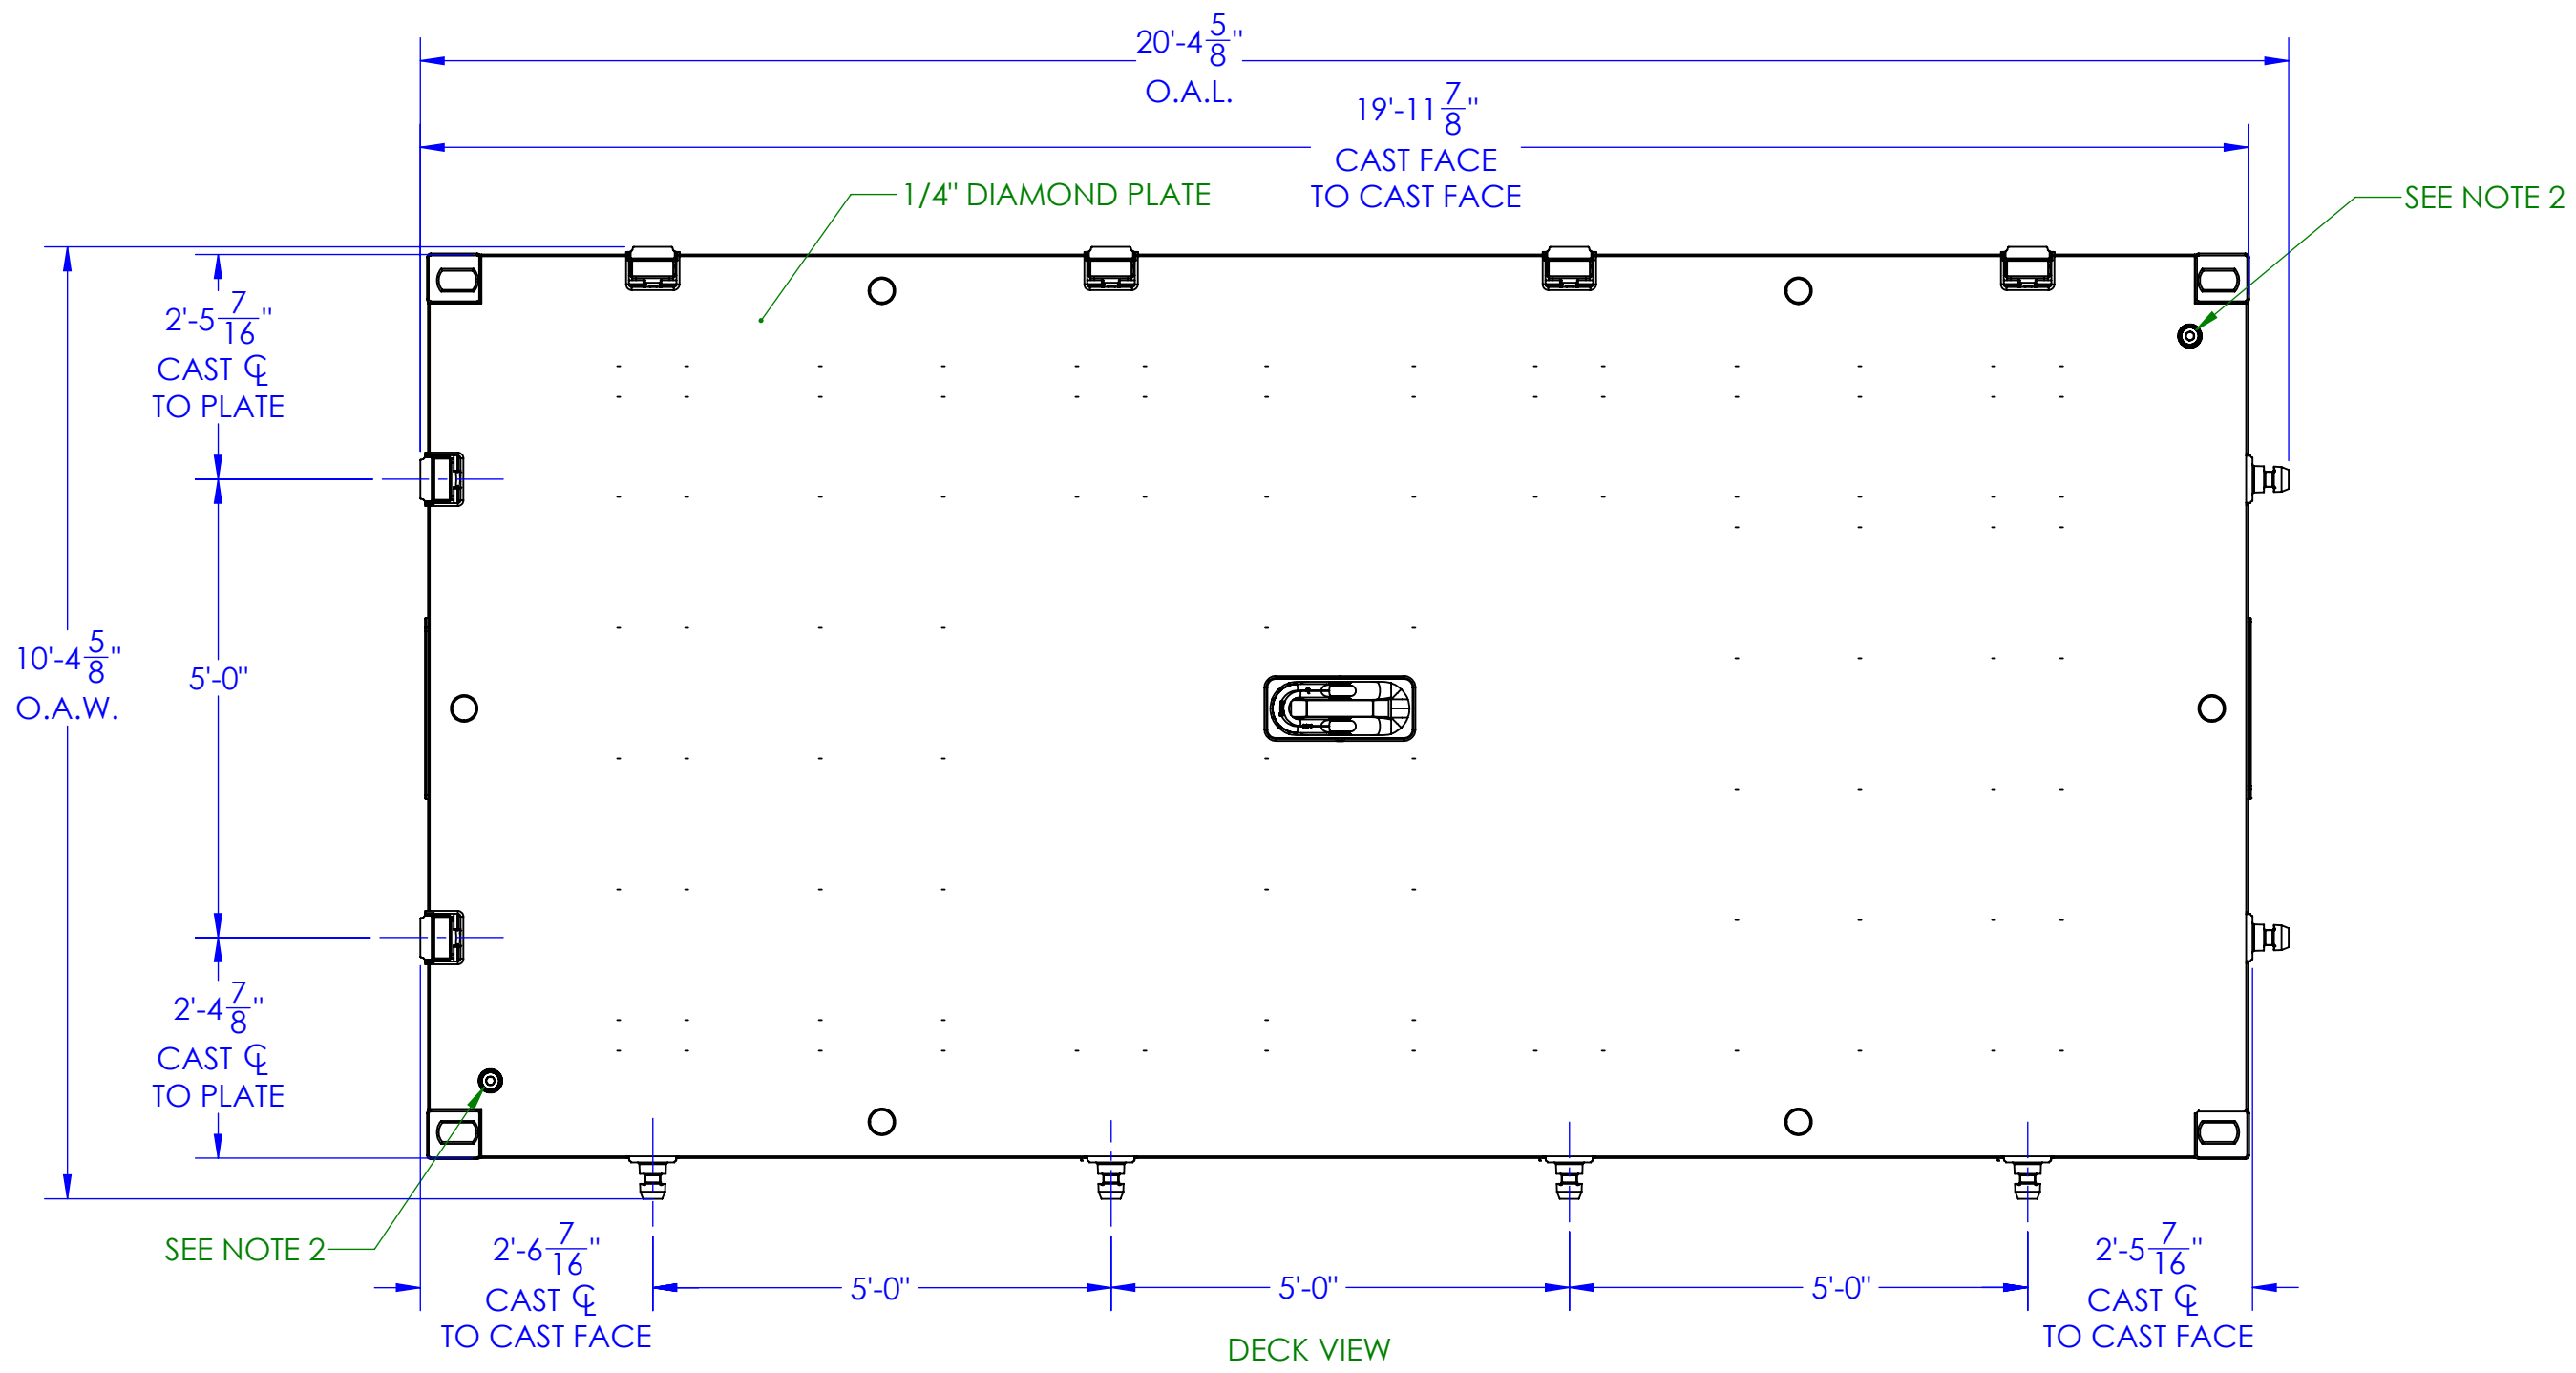

SPECIFICATIONS

UNIT WEIGHT: 15,213 LBS
HORIZONTAL LOCK SPACING: 5.0 FT
VERTICAL LOCK SPACING : 4.46 FT
DECK BEARING CAPACITY: 5,000 LBS/SQ FT
LOCK STRENGTH @ 65% YIELD: 70 TONS TENSION/SHEAR

NOTES:

- TO ENTER FLOAT FOR INSPECTION OR REPAIR REMOVE FEMALE SIDE CORNER PLATES OR CUT OUT END/SIDE PANELS AS SHOWN. AFTER COMPLETION OF INSPECTION/REPAIR REPLACE PANEL, SEAL WELD, AND TEST FOR LEAKS AS DESCRIBED IN NOTE 2.
- TEST FOR LEAKS BY APPLYING INTERNAL AIR PRESSURE OF 3 PSI MAXIMUM. BRUSH ALL EXTERNAL WELD SEAMS WITH WATER AND SOAP SOLUTION. LEAKS WILL BE DETECTED BY FORMATION OF SOAP BUBBLES.

THRUSTMASTER OF TEXAS, INC.				
GA, FM5200 20' X 10' X 5'	SCALE	SIZE	MATERIAL	FINISH
1:24	D	D	D	D
D130240	EST. WY.	15233 LBS	PROJECT REF NO.	FM210367
65848	DO NOT SCALE	THIRD ANGLE PROJECTION	INCHES (mm)	SHEET 1 OF 1