

nifty

HR12 SELF PROPELLED ACCESS PLATFORM



12.20m (40ft)
Working height

6.10m (20ft)
Working outreach

Telescopic Upper Boom
Greater accuracy when
positioning platform

1.50m Chassis Available
Improved narrow aisle access

Weight Under 3.1 Tonnes
Low cost transportation

**Fully Proportional
Hydraulic Controls**
Simple, reliable &
easy to maintain

Bi-Energy Available
Optimising Utilisation



niftylift.com






nifty

Height Rider 12

The Nifty **Height Rider 12** is one of the most versatile and reliable machines in its class. It is specifically designed to give maximum reach performance from the lightest, most compact base possible. A telescopic upper boom gives improved accuracy when positioning the platform and superb manoeuvrability makes it ideal for a wide range of applications.

SAFETY FEATURES

- Automatic Failsafe Brakes
- Tilt Alarm
- Foam Filled or Solid Tyres
- Manual Descent with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Dual Harness Points
- CE Mark

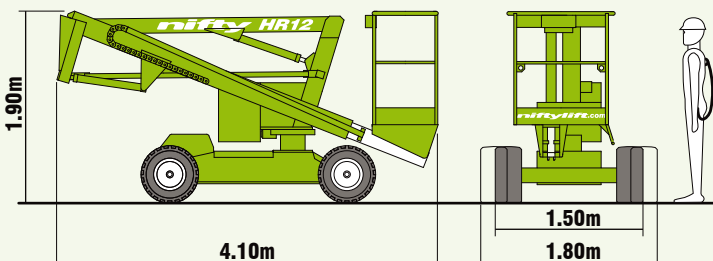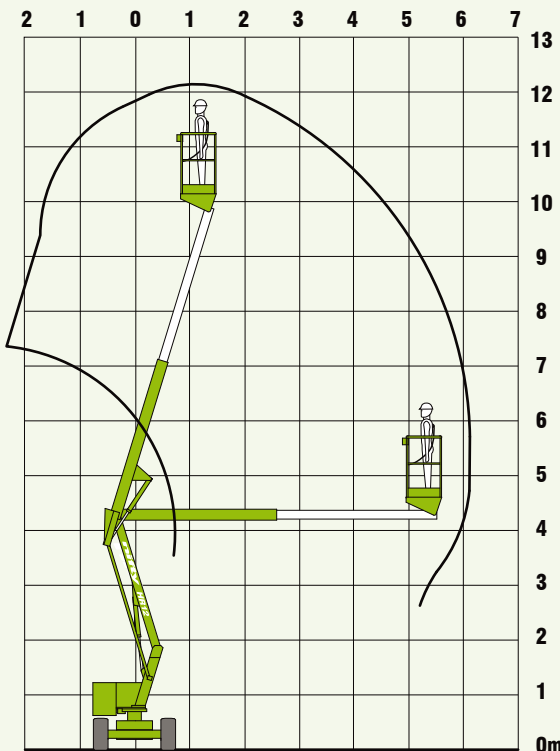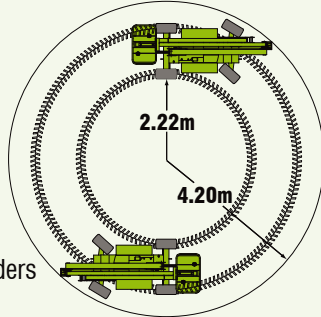

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.



The **HR12's** Bi-Energy option allows it to work for extended periods inside and outside, making it the perfect all-rounder.

SPECIFICATIONS

Working Height	12.20m	40ft
Platform Height	10.20m	33ft 5in
Working Outreach	6.10m	20ft
Slew	360°	
Width - Standard	1.80m	5ft 11in
- Narrow	1.50m	4ft 11in
Height	1.90m	6ft 3in
Length	4.10m	13ft 5in
Minimum Weight - Standard	2,630kg*	5,800lbs*
- Narrow	3,060kg*	6,750lbs*
Turning Radius - Inside	2.22m	7ft 3in
- Outside	4.20m	13ft 9in
Platform Capacity	200kg	440lbs
Platform Size	1.10m x 0.65m	3ft 7in x 2ft 2in
Drive Speed	2.1mph	3.4 kph
Gradeability	25%	
Control System	Fully Proportional Hydraulic	
Power Options	Battery Only	
	Petrol, Diesel or LPG Only	
	Bi-Energy (Engine & Battery)	

* Weights may vary according to specification, please confirm before ordering.

Supplied by: Clark Lifting Solutions UK Ltd
 Bridge Garage
 Henfield Road
 Cowfold
 West Sussex
 RH13 8DT
 Tel: 01403 864 864
 www.clarkliftingsolutions.co.uk
 Info@clarklifting.com

IS-06

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



NIFTYLIFT LTD
 Fingle Drive
 Stonebridge
 Milton Keynes
 MK13 0ER
 England
 www.niftylift.com
 e.mail: info@niftylift.com
 Tel.: +44 (0)1908 223456
 Fax.: +44 (0)1908 312733