

# **Model FCI01**

The model FCI01 flanged chemical injection assembly is designed so that chemical can be continuously injected into the process with no interruptions. The design is simple yet effective. This is a "sandwich" type design, with the FCI01 being mounted directly between the header connection on the pipe and either a valve or connecting flange.

### Fitting details

**Mounting**: 0.5" – 24" ASME (ANSI) B16.5 flange RJ / RF / FF


Standards: Conforms to NACE MR0175 & MR0103


**Temperature Range**: As per flange / material ratings

Pressure Rating: As per selected flange rating

# **ASSEMBLY**


The design has been methodically laid out, with the main characteristics of the assembly being as configurable as possible to allow even the most bespoke requirements being part of the "standard" design.

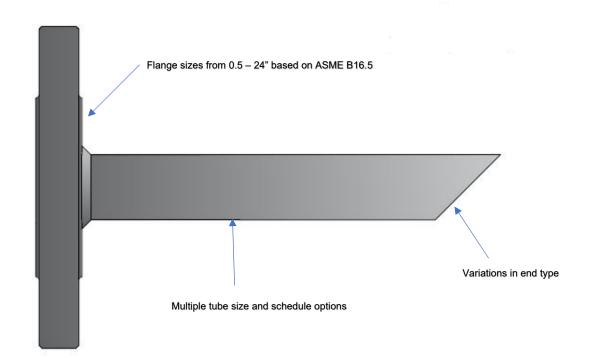

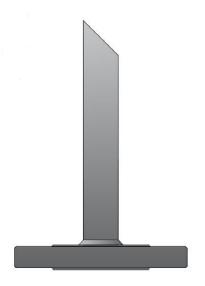




# PART NUMBER: FCI01-A-B-CDE-IL-XXXXXX



#### "A" TUBE END TYPES

QUILL TYPES "A"		NOZZLE TYPES "A"	
45° QUILL	A = Q1	90° NOZZLE 1/4" NPT	A = N1
60° QUILL	A = Q2	0° NOZZLE 1/4" NPT	A = N2
90° OPEN	A = Q3	90° NOZZLE 1/2" NPT	A = N3
		0° NOZZLE 1/2" NPT	A = N4

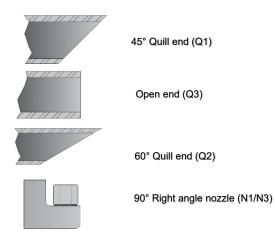



## "B & C" SIZE CODES (NOMINAL SIZES)

0.25" = A	1,25" = E	3.00" = I	6.00" = M
0.50" = B	1.50" = F	3.50" = J	8.00" = N
0.75" = C	2.00" = G	4.00" = K	10,00" = O
1.00" = D	2,50" = H	5.00" = L	12.00" = P

## FLANGE RATING / TYPE "D & E"

150#RF = 01	150#RJ = 06	150#FF = 11
300#RF = 02	300#RJ = 07	300#FF = 12
600#RF = 03	600#RJ = 08	600#FF = 13
1500#RF = 04	1500#RJ = 09	1500#FF = 14
2500#RF = 05	2500#RJ = 10	2500#FF = 15

FOR TUBE SIZES NOT NOMINAL THESE CAN BE PUT AS "SIZE IN INCHES" IM FOLLOWED BY "PIPE WALL THICKNESS" IM ie FOR 1.00" OD PIPE WITH  $\frac{1}{4}$ " PIPE WALL IS "1.00IM0.25IM". FOR METRIC SIZES FOLLOW THE SIZES WITH MM, ie 8mm PIPE OD WITH 1.5mm PIPE WALL IS "8MM1.5MM"

 $<sup>\</sup>fbox{1}$  B CODE IS FOLLOWED BY SCH WITH 'S' THEN SCH NUMBER. IE 1" SCH 40 = DS40