

CLM Products CLM2.5 PPC Filtration System


■ Product Features

Supercharged by  CLM Premium Filter

CLM Products CLM2.5 PPC is a compact, contemporary-looking, well-designed filtration system that effectively removes impurities and harmful substances. It is independently certified to NSF/ANSI 42 standards, giving you peace of mind while you enjoy the clean, crisp water you deserve.

- The Filtration System is supercharged by a CLM Premium PPC filter, which provides single-stage filtration that effectively removes chlorine, taste, and odor from the water.
- The CLM2.5 features a sturdy PP plastic hanging bracket and high-performance, BPA-free, food-grade PP and clear PET filter enclosures. It features double O-ring housings, an anti-back-off safety lock, and reinforced double O-ring lead-free brass 1/2" NPT male water ports, providing a durable, deformation-resistant structure and significantly reducing the risk of water leakage from extended use, wear, and tear.
- The CLM2 Series housing is tested and certified to NSF/ANSI standard 42 by NSF International for materials and structural integrity requirements.
- The CLM Premium PPC filter is tested and certified by NSF International against NSF/ANSI Standard 42 for the reduction of Chlorine, Taste and Odor.
- The CLM Premium PPC filter is made of (modified) activated carbon powder, a thermoplastic binder, and other additives according to the sintering ratio. It has a porous structure, an adjustable filter pore size, strong adsorption capacity, various modification features, and other fine characteristics. It is a new type of water treatment filtration technology.
- Through sophisticated material selection and process-molding innovation, CLM Products Inc's filter manufacturing facility has achieved a unique point-to-point binding mode for carbon powder using a thermoplastic binder. This overcomes the drawbacks of binder over-coverage in the traditional carbon block technique and delivers a superior performance-to-cost ratio.

■ Filter Schematic Diagram

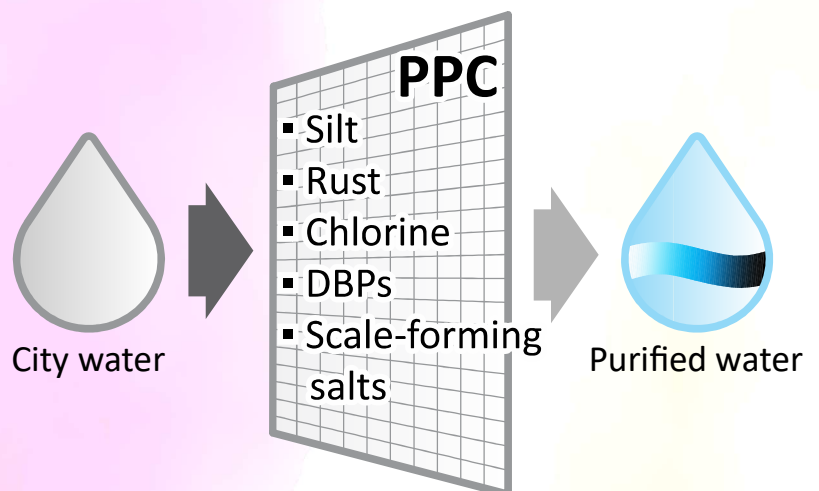

CLM Products CLM2.5 PPC Filtration System

■ Product Details



Supercharged by  CLM Premium Filter



This CLM2 is Tested and Certified by NSF International against NSF/ANSI Standard 42 for materials and structural integrity requirements

COMPONENT



Tested and Certified by NSF International against NSF/ANSI Standard 42 in model CLM4.X for the reduction of Chlorine, Taste and Odor.

REPLACEMENT ELEMENT

■ Choose from other NSF-certified genuine CLM Premium PPC, CTO, or LCB Series replacement filters for your specific application.



1. Integrated sturdy PP wall-mounting bracket
2. Reinforced lead-free brass female ports with lead-free brass double O-ring 1/2" NPT male fittings
3. BPA-free PP filter head
4. Anti-back-off safety lock
5. BPA-free PET double O-ring clear housing/canister (you can see the system works hard for you)
6. PPC filter insert- 0.22-micron, chlorine, taste and odor removal & scale inhibition
7. Filter insert changing wrench

- Scale inhibition efficiency $\geq 90\%$ @3L/min, 250ppm hardness spiked water**
- Turbidity removal rate $\geq 60\%$ @3L/min, 15NTU A2 powder spiked water**
- Chlorine removal rate $\geq 95\%$ @3L/min, 2 ± 0.2 ppm residual chlorine spiked water**
- Capacity ≥ 1320 Gallon/5000L (Water quality varies from place to place)



Scan QR code to reorder
clm-products.com