


#### **POLYMER CONCRETE BOX & COVER MODEL 2436/24 PC**



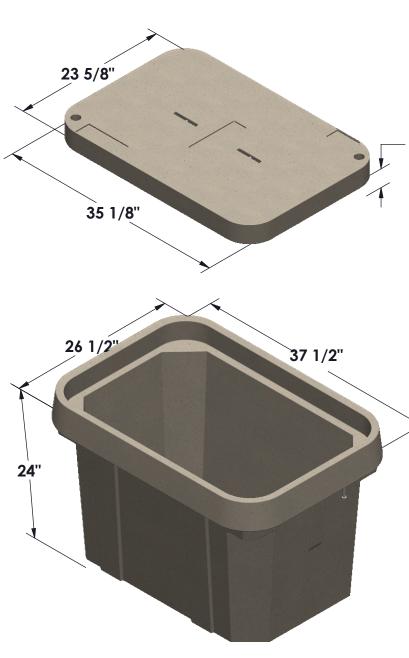

### Vertical Loading Requirements

Design Load: 22,500lbs Test Load: 33,750lbs

#### Lateral Loading Requirements

Design Load: 800lbs/sq. ft Test Load: 1200lbs/sq. ft.

#### COVER

**Dimensions\*** Material Style **Fasteners** Lift points Non-skid cover 35 1/8" x 23 5/8" x 3" Polymer Concrete **Single Piece** 3/8-16 x 3" SS Hex Bolt 1/4" SS Rod

Custom Logo Available

#### **Body**

Material Lift Points

Dimensions\* 37 1/2" x 26 1/2" x 24" Polymer Concrete **4-SS Lifting Bolts** 

Additional Depths: (30",36")

## Description

\*Vault Weight: 180 lbs.

- \*Cover Weight: 104 lbs.
- \*Total Assembly weight: 284 lbs.
- \*Vaults per pallet: 6
- Vaults per truck: 132

\*Truckload weight includes pallets: \*38,368 lbs.

\* All Weights And Dimensions Are Approximate

# **Optional Accessories**

**EMS Frequency Markers** Metallic Locate Plates Mouse Holes Conduit Ports Cable Racking Hooks

Contact Us: Ph: 940-703-0452 Email: info@terra-vaults.com website: www.terra-vaults.com