

Eco-Duo Coupler Street Reducer

Coupler Street Reducer 28mm x 15mm	(10 Pack)
Coupler Street Reducer 35mm x 22mm	(10 Pack)
Coupler Street Reducer 35mm x 28mm	(10 Pack)
Coupler Street Reducer 42mm x 22mm	(10 Pack)
Coupler Street Reducer 42mm x 28mm	(10 Pack)
Coupler Street Reducer 42mm x 35mm	(10 Pack)
Coupler Street Reducer 54mm x 35mm	(Single)
Coupler Street Reducer 54mm x 42mm	(Single)
Coupler Street Reducer 66.7mm x 28mm	(Single)
Coupler Street Reducer 66.7mm x 35mm	(Single)
Coupler Street Reducer 66.7mm x 42mm	(Single)
Coupler Street Reducer 66.7mm x 54mm	(Single)
Coupler Street Reducer 76.1mm x 35mm	(Single)
Coupler Street Reducer 76.1mm x 42mm	(Single)
Coupler Street Reducer 76.1mm x 54mm	(Single)
Coupler Street Reducer 76.1mm x 66.7mm	(Single)
Coupler Street Reducer 108mm x 42mm	(Single)
Coupler Street Reducer 108mm x 54mm	(Single)
Coupler Street Reducer 108mm x 66.7mm	(Single)
Coupler Street Reducer 108mm x 76.1mm	(Single)

SKU | RRP EX VAT

W8344 CP	£154.20
W8345 CP	£191.20
W8346 CP	£211.50
W8347 CP	£330.40
W8348 CP	£324.10
W8349 CP	£314.70
W1557 CP	£42.64
W1558 CP	£47.21
W1559 CP	£123.91
W1560 CP	£126.17
W1561 CP	£126.97
W1562 CP	£149.96
W1563 CP	£181.16
W1564 CP	£188.42
W1565 CP	£195.13
W1566 CP	£174.07
W8386 CP	£POA
W8387 CP	£POA
W8389 CP	£POA
W8390 CP	£POA



Weight KG / Fittings - Single

Coupler Street Reducer 28mm x 15mm	- 0.05 KG
Coupler Street Reducer 35mm x 22mm	- 0.07 KG
Coupler Street Reducer 35mm x 28mm	- 0.09 KG
Coupler Street Reducer 42mm x 22mm	- 0.11 KG
Coupler Street Reducer 42mm x 28mm	- 0.12 KG
Coupler Street Reducer 42mm x 35mm	- 0.12 KG
Coupler Street Reducer 54mm x 35mm	- 0.16 KG
Coupler Street Reducer 54mm x 42mm	- 0.19 KG
Coupler Street Reducer 66.7mm x 28mm	- 0.97 KG
Coupler Street Reducer 66.7mm x 35mm	- 0.97 KG
Coupler Street Reducer 66.7mm x 42mm	- 0.97 KG
Coupler Street Reducer 66.7mm x 54mm	- 0.99 KG
Coupler Street Reducer 76.1mm x 35mm	- 1.07 KG
Coupler Street Reducer 76.1mm x 42mm	- 1.07 KG
Coupler Street Reducer 76.1mm x 54mm	- 1.08 KG
Coupler Street Reducer 76.1mm x 66.7mm	- 1.16 KG
Coupler Street Reducer 108mm x 42mm	- 0.93 KG
Coupler Street Reducer 108mm x 54mm	- 0.94 KG
Coupler Street Reducer 108mm x 66.7mm	- 1.05 KG
Coupler Street Reducer 108mm x 76.1mm	- 1.10 KG

Features and Benefits

- Patented Pipe-in-a-pipe technology
- Saves 50% energy costs (tested by BRE)
- Maintains temperatures across the whole building.
- Halves installation time and costs
- 50% reduction in pipe fixings and insulation
- No special installation required
- Pipework can be cut as normal
- Helps to reduce the risk of Legionella and other water borne pathogens
- Can be used on hot and cold potable water systems

Notes:

- Only for use with potable water (not closed heating systems)
- Only for use with pumped recirculated water

Details

Finishing Options:

Copper CP

Max Pressure:

16 Bar

Designer:

Maxwell Bridges


Material Type:

Main Body: Copper

Separators: 316 Stainless Steel

SKU	Description	l1	d1	D1	es1	z1	l2	d2	es2	z2	DN1	DN2
-	28 x 15mm	25	15	23	20	4	37	28	23	14	DN12	DN25
-	35 x 22mm	29	22	31	21	9	39	35	26	13	DN20	DN32
-	35 x 28mm	28	28	37	23	5	35	35	26	9	DN25	DN32
-	42 x 22mm	25	22	31	21	4	49	42	30	19	DN20	DN40
-	42 x 28mm	27	28	37	23	4	44	42	30	14	DN25	DN40
-	42 x 35mm	35	35	44	26	8	38	42	30	8	DN32	DN40
W1557 CP	54 x 35mm	35	35	44	26	9	53	54	35	18	DN32	DN50
W1558 CP	54 x 42mm	40	42	53	30	9	47	54	35	12	DN40	DN50
W1559 CP	66.7 x 28mm	37	28	37	23	14	72	67	50	22	DN25	DN65
W1560 CP	66.7 x 35mm	40	35	44	26	14	69	67	50	19	DN32	DN65
W1561 CP	66.7 x 42mm	43	42	53	30	13	67	67	50	17	DN40	DN65
W1562 CP	66.7 x 54mm	49	54	65	35	14	63	67	50	13	DN50	DN65
W1563 CP	76.1 x 35mm	39	35	44	26	13	74	76	50	24	DN32	DN65
W1564 CP	76.1 x 42mm	43	42	53	30	13	70	76	50	20	DN40	DN65
W1565 CP	76.1 x 54mm	52	54	65	35	17	64	76	50	14	DN50	DN65
W1566 CP	76.1 x 66.7mm	66	67	83	50	16	60	76	50	10	DN65	DN65
-	108 x 42mm	47	42	53	30	17	106	108	67	39	DN40	DN100
-	108 x 54mm	54	54	65	34	20	102	108	67	29	DN50	DN100
-	108 x 66.7mm	70	67	83	50	20	96	108	67	25	DN65	DN100
-	108 x 76.1mm	70	76	94	50	20	92	108	67	25	DN65	DN100

SKU'S shown above pertain to the respective fittings single units SKU

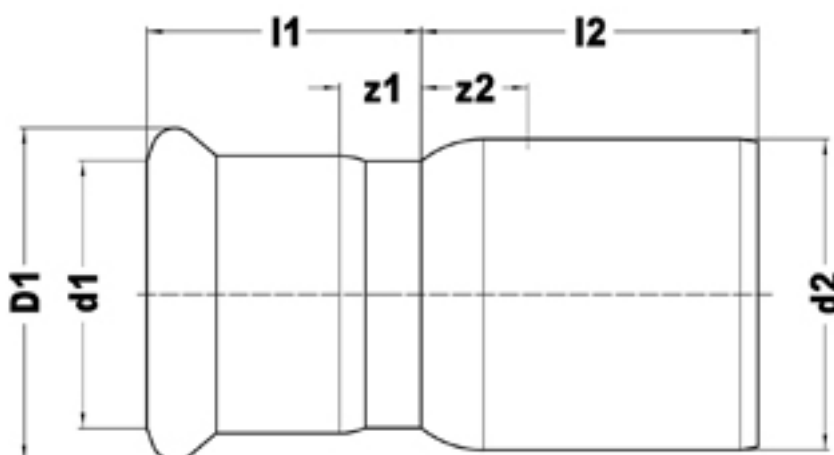

Water Kinetics Eco-Duo Guarantee - Terms and Conditions

Products are subject to a guarantee that is between Water Kinetics, registered at Lomond House 7 Greenbank Road, Darvel, East Ayrshire, United Kingdom, KA17 0NN, Company No: SC632550, VAT: GB 350 116 837, and the final purchaser of the product.

When correctly assembled with the stated tubes and pipe the length of guarantee is as follows:

25 Years

The Eco-Duo Copper and Stainless ranges are guaranteed for a period of 25 years commencing on the date of purchase when installed in conjunction with Eco-Duo fittings and components.

The guarantee is subject to proof of purchase being supplied.

This guarantee does not affect any statutory rights the purchaser may have in law.

The guarantee covers manufacturing or material defects when installed in accordance with our instructions on specified tube materials and applications and does not cover instances of normal wear and tear).

This product range has been designed for the use of domestic and commercial applications and therefore the guarantee is subject to the product being properly selected for their intended service conditions.

The guarantee is not applicable where the product is fitted contrary to the conditions contained within the fitting instructions.

Provided Eco-Duo is installed correctly and receives adequate preventative maintenance it should give years of trouble-free service.

Abusive behaviour, and accidental damage to the product are not covered by this guarantee.

The extent of any liability from this guarantee is limited to the cost of the replacement of the defective item and not to installation or consequential damages.

Eco-Duo is a trademark of Water Kinetics Ltd

Water Kinetics Ltd makes every effort to ensure that the information provided on its website is accurate. However, we cannot guarantee this, and accept no liability for any information or advice given via its website.

