




KEY FEATURES

- 87' Working height, 77' side reach on 25,999 lb. chassis
- Material handling on main boom and in work platform
- 30" x 54" EZR work platform with 750 lb. capacity
- 180 Degree platform rotation
- Full length steel subframe for excellent stability and long chassis life




Stow & Go Jib Winch

Stows in platform and requires no assembly. 500 lb. capacity in all positions eliminates guesswork.




180 Degree Platform Rotation

Maximizes access for each set up.



Main Boom Material Handling

2,000 lb capacity for added functionality



Heavy Duty Structural Components

Robust subframe, turret, bearing, outriggers and boom for smooth ride and exceptionally long useful life.

OTHER FEATURES


- **Hydraulic System:** High performance hydraulics provide smooth operation. Continuous rotation and pressure & return filtration come standard.
- **Controls:** Electronic proportional three stick remote controls with hi/low range and hi/low engine speed for smooth operation in tight spaces.
- **Offside Interlocks:** Allow outriggers to be deployed on one side to minimize set up footprint.
- **Lifetime Structural Warranty:** For your peace of mind.
- **Certification:** Certified to ANSI A92.2 for Vehicle Mounted Elevating and Rotating Devices.

**Specifications are subject to change.*

MAIN BOOM LOAD RATINGS

WITH PLATFORM REMOVED*

DEDUCT 350 LBS. WITH PLATFORM ATTACHED

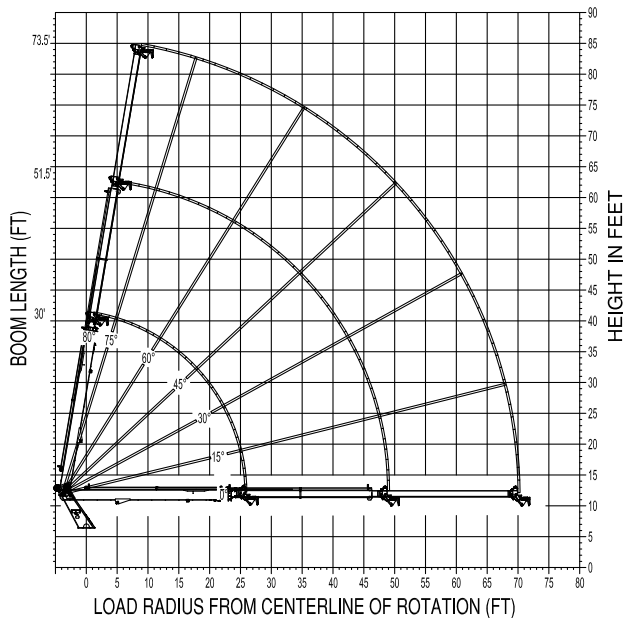


MAXIMUM WORKING LOADS

PLATFORM AND JIB OPERATION

MAX PLATFORM CAPACITY: 600 LBS MAX JIB CAPACITY: 500 LBS

TOTAL PLATFORM CAPACITY (JIB LOAD PLUS PERSONNEL)

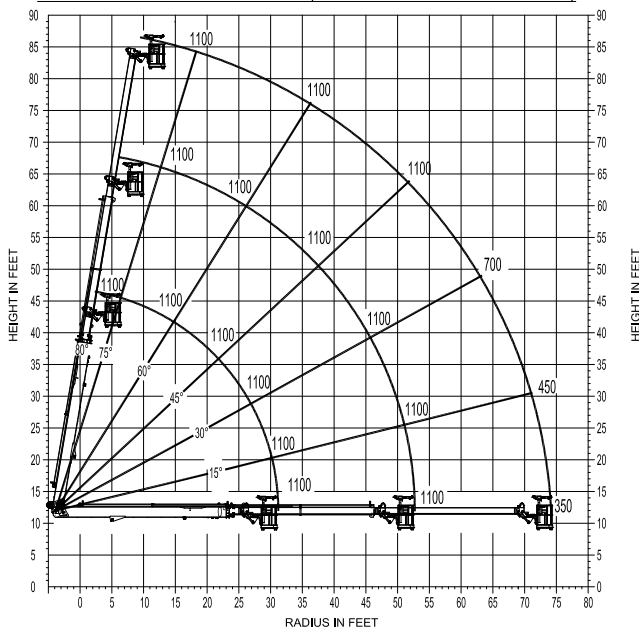

TECHNICAL SPECIFICATIONS

Working Height	87' / 25,5 m
Working Side Reach	77' / 23,5 m
Platform Capacity	600 lb / 272 kg
Main Winch Capacity	2,000 lb / 907 kg
Jib Winch Capacity	500 lb / 227 kg
Front Outrigger Spread	14' 6" / 4,4 m
Rear Outrigger Spread	18' 4" / 5,6 m
Minimum GVWR	25,999 lb / 11793 kg

AVAILABLE OPTIONS

- 500 lb Capacity Stow & Go Jib Winch in Platform
- 2,000 lb Capacity Main Boom Winch
- 110 V Power Outlet in Platform
- Walkway Access to Platform
- Steel or Aluminum Toolboxes
- Steel, Wood or Aluminum Flatbed
- Rear Step Bumper
- Composite or Wooden Outrigger Pads
- Red, White or Custom Paint Colors
- 'Built for You' Additional Customization for Your Unique Application

Boland Equipment Rentals
282 Hudson Street
Hackensack, NJ 07601