EXIT STOPPER

HAS THE EXIT STOPPER DETERRED UNAUTHORISED EXITS?

The residents at the home were continuously leaving the emergency exit doors open, which became a safety and security risk to the residents and staff. After sourcing advice on how to tackle the problem, the local fire officer recommended the Exit Stopper

Since they were installed, it has proved very successful deterring the residents from misusing the Emergency Exits. It has also given the staff piece of mind especially during the night shift.

Mrs Power - The Island Residential Home

STI EXIT STOPPER

Stop unauthorised exits and entries through emergency exit doors. The Exit Stopper is a unique and highly effective way to alert you to any unauthorised exits or entries through any emergency exit door. It can also serve as an inexpensive security device and help prevent

HOW IT WORKS

If the protected door is opened, the electronic Exit Stopper emits an ear piercing alarm. When the door is closed, a number of reset options are available including an automatic function. A variety of alarm duration and setup features are available. See feature chart below. A key operated override facility will silence the alarm and allow authorised exits. The Exit Stopper is fitted with a 9V PP3 alkaline battery. It is available in red or green and can be mounted or installed on almost any type of door, including remote placement of the sounder.

STI 6400 STI 6400/G

STOF

Push bar to


FEATURES

STI 6400

- Completely self-contained electronic door alarm
- Highly visible 'stop sign' discourages unauthorised use of emergency doors
- Fitted with a 9V PP3 alkaline battery (included)
- Key operated override facility
- 32 user programmable features
- Highly versatile can be mounted or installed on almost any type of door, including remote placement of sounder
- Available in red or green
- 40 milliamp 9 VDC trigger output
- Incorporates a 12/24 VDC connection
- Can be installed and protecting doors in minutes
- Lifetime guarantee against breakage of polycarbonate housing (one year on electronic components)
- Virtually indestructible polycarbonate housing
- Remote powered 12 or 24 VDC model available for special applications
- Compact design (136mm/5.35" diameter and 50mm/1.97" deep)



▼ Exit Stopper dimensions and technical information (STI 6400)

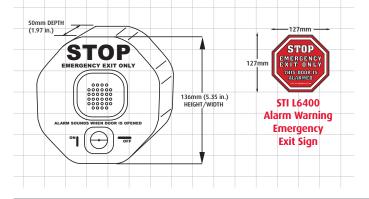

MODELS AVAILABLE

Exit Stopper - red

Exit Stopper - red, suitable for a double STI 6402

door installation

ACCESSORIES

STI 6400/RK Remote installation kit

(includes 3m wire, connecting blocks & fixings)

STI 6400/RS Remote 95/97dB sounder

STI CO23/A Spare key

STI L6400 Alarm warning emergency exit sign

OPTIONS

COLOURS For Green, add /G

AVAILABLE

EXAMPLE STI 6400/G = Exit Stopper in green

User Programmable Feature	JP2	JP3	JP4	JP5	JP7
High Volume* (97dB)	ON				
Low Volume (95dB)	OFF				
Immediate Arming*					ON
15 Second Arming Delay					OFF
Immediate Activation*				OFF	
15 Second Activation Delay				ON	
30 Second Alarm Duration*		OFF	OFF		
180 Second Alarm Duration		OFF	ON		
Continuous Alarm Duration		ON	OFF		
Door Prop Mode (5 beeps)		ON	ON		

Factory Settings

Specifications			
Housing	3 mm/1/8" polycarbonate		
Power Source	9 VDC Alkaline		
Sounder Output (at 1 metre)	95dB - low/97dB - high		
Relay Output	9 VDC, 40mA		
Dimensions	136mm/5.35" w x 136mm/5.35" h		
	x 50mm/1.97" d		
Standby Current	10uA		
Alarm Current	200mA		