

NESS

Anlagen für die Nahrungsmittelindustrie
Installations for the Food Industry

Ness CS100 1-1 | Technical Data

Features:

Hot Smoke

Cold Smoke

Cooking

Maturing

Baking

Cooling

304 to 316 Stainless Steel


Circo-Smoke© Closed System

Single Fan Design



Capacity	1 Trolley
Width of Chamber	1.5 m
Total Width	1.99 m
Depth	1.28 m
Chamber Height	2.7 m
Total Height	3 m
Required Room Height	3.2 m
Trolley Width	1.02 m
Trolley Depth	1.02 m
Trolley Height	2 m
Smoke Stick Length	1m
Connection Load – Electric	28.8
Voltage	460
Phase	3
Air Circulation Fan	1.2/4.8 2 stage
Number of Circulation Fans	1

*All technical data is subject to change. The COMPACT series replaces the UNIGAR series.

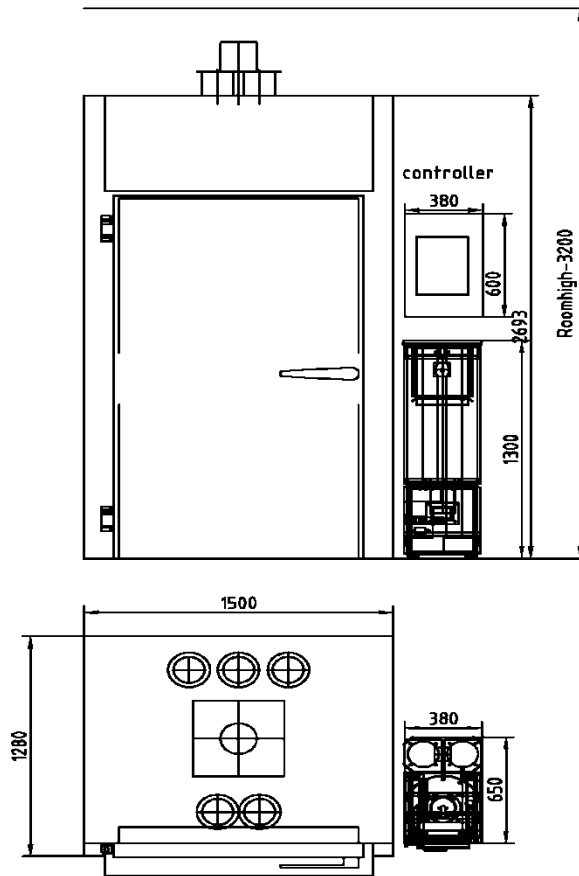

Electric:
 CS 100-1-1
 Voltage: 3/N/PE, 50Hz, 400 Volt (200V/60 Hz)
 Connections : Motor fan: 4,8/1,2 kW
 Smoke gen. Unifum 200: 0,7 kW
 Heating: 28,8 kW
 Controller : 1 kW

Compressed air
 for flaps and smoke generator
 Connections G 1/4"
 Pressure 6 BAR
 Consumption 130 L/H
Compressed air
 for cleaning
 Connections G 1/4"
 Pressure 8 bar
 Consumption 200 l/min

Water for cleaning
 Connections R 1/2"
 Pressure min. 4 bar
 max. 6 bar
Water for shower
 Connections R 3/4"
 Pressure min. 4 bar
 max. 6 bar
 Consumption : 20 L/min

Cooling
 Consumption : 4 kW
 Cooling agent: ???

				<i>Freimaßtoleranzen nach DIN7168 m</i>	<i>Gewicht</i>	<i>Maßstab 1:50</i>
				<i>Datum</i>	<i>Name</i>	<i>Werkstoff</i>
				bearbeitet 19.06.22	Radu	
				geprüft		
				genehmigt		
<i>Zust</i>	<i>Änderung</i>	<i>Datum</i>	<i>Name</i>	<i>Normgepr</i>		
GERMOS NESS GmbH & Co KG 73630 Remshalden Germany				Benennung CS 100-1-1 1 cage house with smoke generator right		
				Auftrag-Nr.	Zeichnung-Nr. CS 100-1-1+Unifum 200	Blatt

VERTRAULICH ALLE RECHTE VORBEHALTEN Weitergabe oder Vervielfältigung ohne vorherige Zustimmung verboten