

STAYING AHEAD OF THE ROAST!

THE 2023/24 BC-25 CONTINUES TO GROW IN NEW FEATURES EACH YEAR. AND THE 2023/24 MODEL ADDS 7 NEW FEATURES TO HELP THE ROASTMASTER PRODUCE THE FINEST IN COFFEE ROASTING:

1. NEW FRONT BEARING SYSTEM THAT ALLOWS ON THE FLY DRUM ALIGNMENTS
2. EASY ACCESS TO BACK DRUM SYSTEM FOR MAINTENANCE
3. A NEW BACK DRUM SHAFT WHEEL FOR QUICK REMOVAL OF BEANS IN THE EVENT OF A POWER OUTAGE WHILE ROASTING
4. TWO WAYS TO CONTROL AIRFLOW VIA THE MANUAL DIAL DAMPER PLUS PRECISE AIR FLOW CONTROL VIA A FAN SPEED CONTROLLER POWERED BY A 3 PHASE MOTOR AND CONVERTER
5. NEW FRONT ENTRY DOOR TO BURNER ROOM ALLOWING QUICK MAINTENANCE WHEN NEEDED
6. NEW DATA LOGGER COMPUTER CHIP TO ALLOW DIRECT BLUETOOTH CONNECTIVITY WHILE USING ARTISAN SOFTWARE.
7. NEW IGNITER SYSTEM MODULE

ADD ALL THE ABOVE TO THE MANY PREVIOUS FEATURES WE HAVE ADDED OVER THE LAST SEVERAL YEARS AND YOU HAVE THE MOST ADVANCED BC-8 ROASTER AVAILABLE.

THE BC-25 HD IS THE WORKHORSE IN THE BC LINE. IT WILL ROAST UP TO 125LB. PER HOUR. IT FEATURES EASY TO USE CONTROL PANEL WITH BUILT IN SAFETY FEATURES SUCH AS PILOT LIGHT, EMERGENCY SHUT OFF CONTROL AND MANY OTHER FEATURES TO ENSURE SAFE OPERATION. COMPLETE AIRFLOW CONTROL VIA THE MDDS AIRFLOW SYSTEM. LED LAMP TO LIGHT THE WAY AND LOCKING CASTERS TO MAKE FOR EASY MOVING AND SETUP. DIRECT CONNECT CHAFF UNIT FOR REDUCED FOOTPRINT AND GREATER EFFICIENCY.

IN 2022 WE ADDED MORE HEAVY DUTY FEATURES SUCH AS A NEW HD CHAFF FAN AND HD GAS GAUGE PLUS NEW CUSTOM MADE 3MM THICK THERMOCOUPLES FOR QUICK RESPONSE. A MAG AIRFLOW GAUGE IS INCLUDED & YOU CAN ALSO ADD AN OPTIONAL COOLING TRAY COVER.

“GET YOUR ROAST ON!”




BC-25 HD	GAS TYPE
Batch Size	6-25lb.
Roasting Time	10-15 minutes
Production	96-125lb.hr
Heat Source	NG/LPG
Voltage	220V
Wattage	1200W
Drum Motor	200W
Chaff Fan Motor	370W
Cooling Fan Motor	370W
MIXING ARM	90W
BTU	120,000
NG PRESSURE	7-14WC
LPG PRESSURE	MAX. 16-20WC
Gas Consumption	1.2kg/hr
Roaster Dim.	66x42x74 (LxWxH)
Roaster Weight	1254lb.
Package Dimensions	71x46x65 1365lb.

FEATURES

DRUM TYPE
DATA LOGGING
THERMOCOUPLES
CONTROL PANEL
WARRANTY
PARTS AVAILABLE
DATA LOGGING
THERMOCOUPLES

SINGLE OR DOUBLE WALL
2 OMRON CONTROLS w/BT & ET
K-TYPE FOR BT & ET
BT & ET VEIW ON PANEL
1 YEAR PARTS & INSTRUCTION
10 YEAR PARTS GUARANTEE IN STOCK
USB & BT DATA LOGGING
3MM PROBES

NEW FEATURES FOR 2023/24!

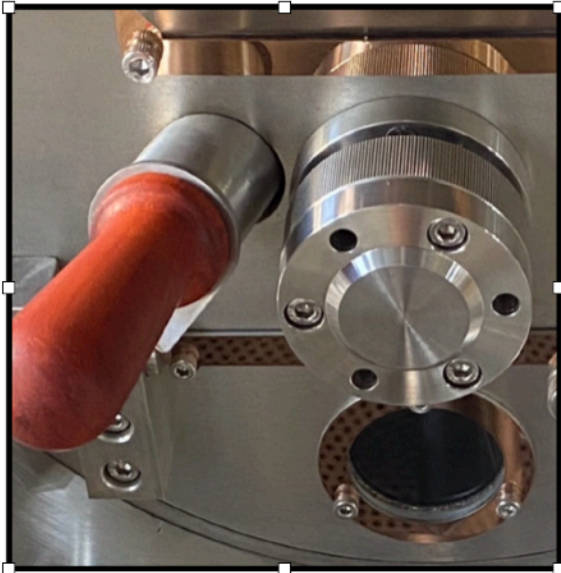

NEW FRONT BEARING SYSTEM



EASY ACCESS BELT COVER



NEW DRUM SHAFT WHEEL



NEW PRECISE ELECTRONIC AIRFLOW CONTROL



FRONT BURNER ROOM DOOR


PLUS NEW BLUETOOTH DIRECT CHIP FOR ARTISAN!

THE BC-25 HD IS A HEAVY DUTY ROASTER BUILT WITH A CARBON STEEL BODY WITH APPROVED POWDER COAT HIGH TEMPERATURE BODY IN BLACK, RED OR WHITE. THE HOUSINGS COME IN A VARIETY OF CHOICES.


TWO EXHAUST PIPE COMES OFF THE BC-25. BOTH HAVE 5" CONNECTIONS. THE CHAFF EXHAUST AT 5" AS SHOWN BELOW AND CAN BE EXHAUSTED SEPARATELY OUT OF BUILDING OR JOINED WITH A BLAST DAMPER OR BACKDRAFT DAMPER ABOVE CHAFF UNIT. (6" HIGH TEMPERATURE VENTING IS RECOMMENDED WHEN VENTING EACH SEPARATELY)

***CLIENT IS RESPONSIBLE TO CONFIRM ACTUAL VENTING SIZES ON MACHINE RECEIVED PRIOR TO ORDERING THEIR VENTING**

2023/24 BC-25 Drawings

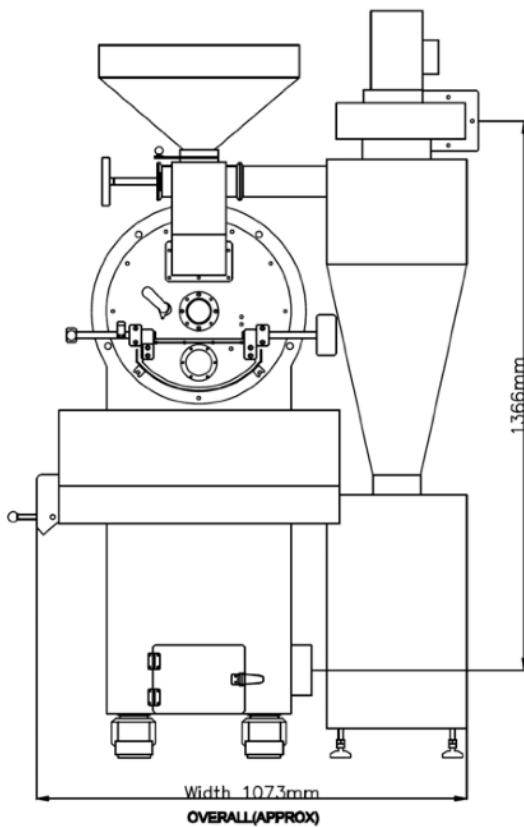


2023/24 BC-25 Drawings

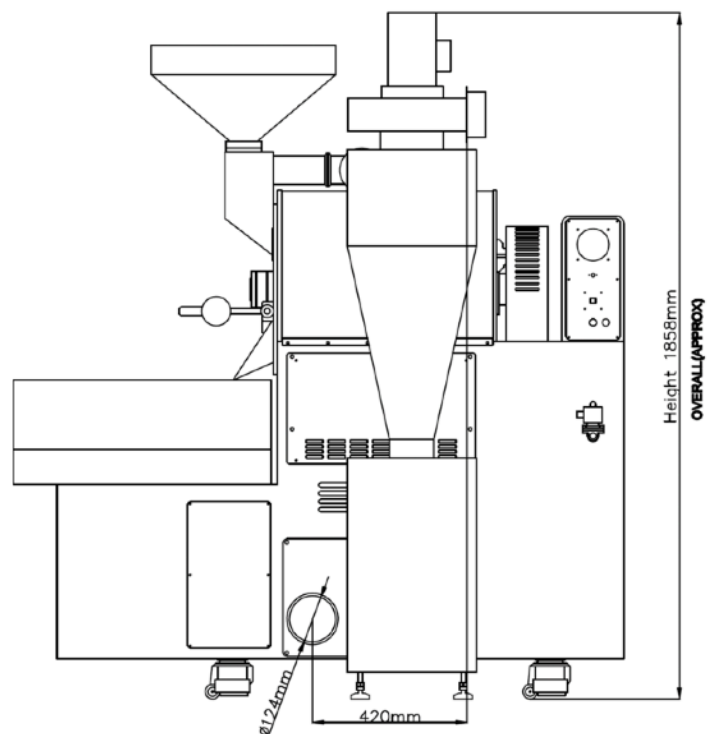

COMPUTER DATA LOGGING VIA ARTISAN SOFTWARE

RECORD ROASTS VIA USB OR BLUETOOTH TO DUPLICATE PROFILES USING ARTISAN SOFTWARE.

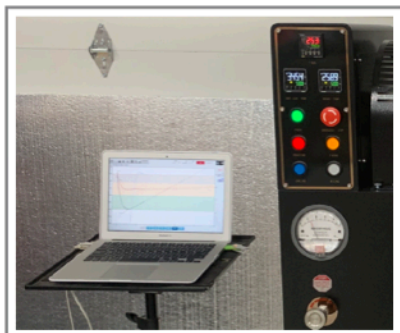

ARTISAN SOFTWARE

Do your part to Keep Artisan Alive
and Well.

Donate to Artisan Here:

<https://artisan-scope.org/donate/>

DO YOUR PART!




CONSIDER

ARTISAN PLUS

<https://shop.artisan.plus>



artisan+

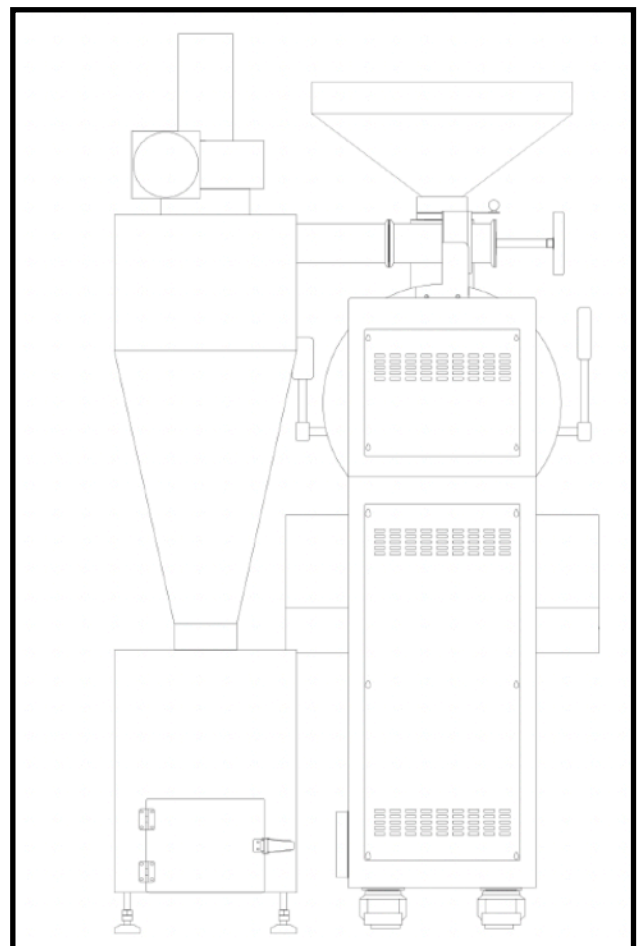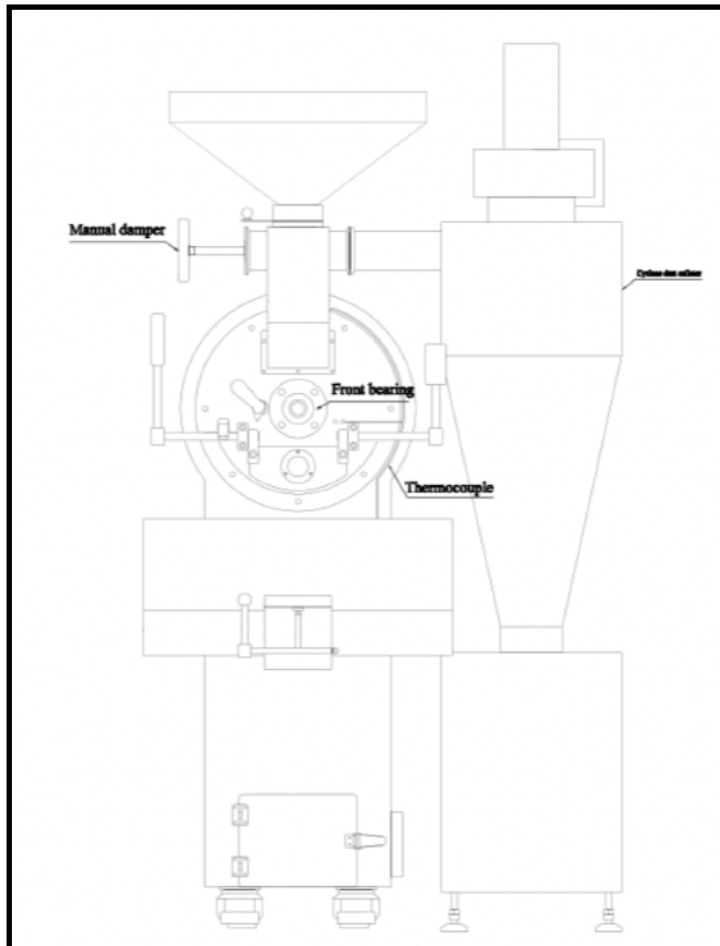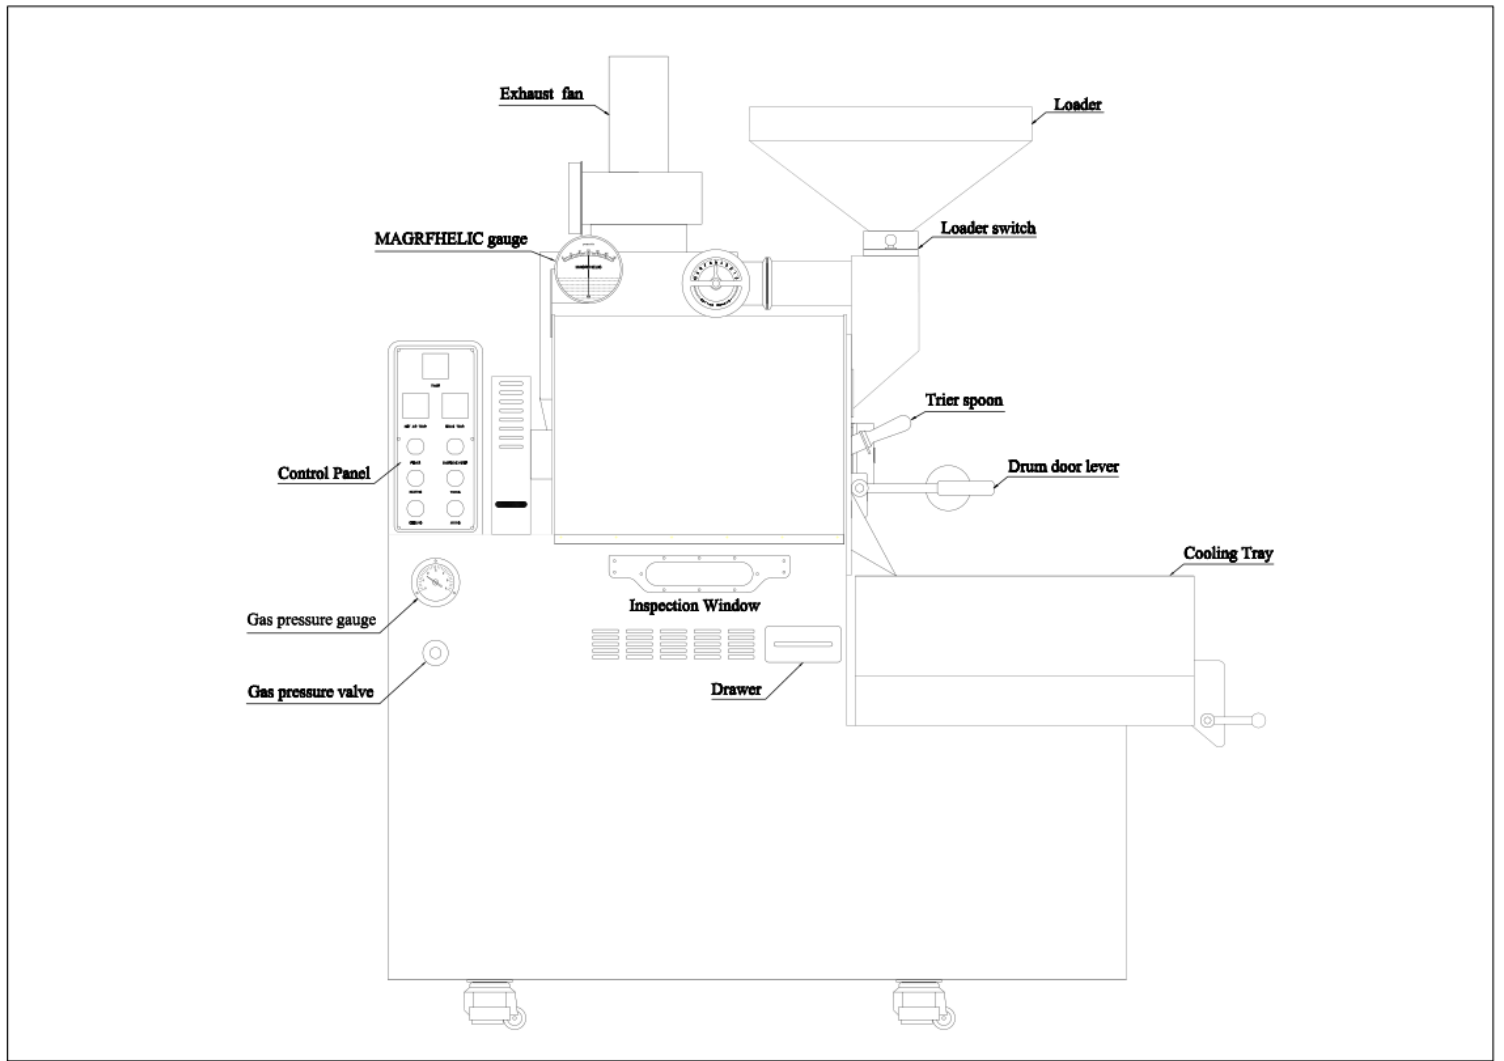

2023/24 BC-25


UPDATED 2023/24 DRAWINGS


SHOW SIZE OF BC-25

1655x1073x1858mm

66x43x74in.

Chaff Unit comes removed to get unit through a
standard doorway

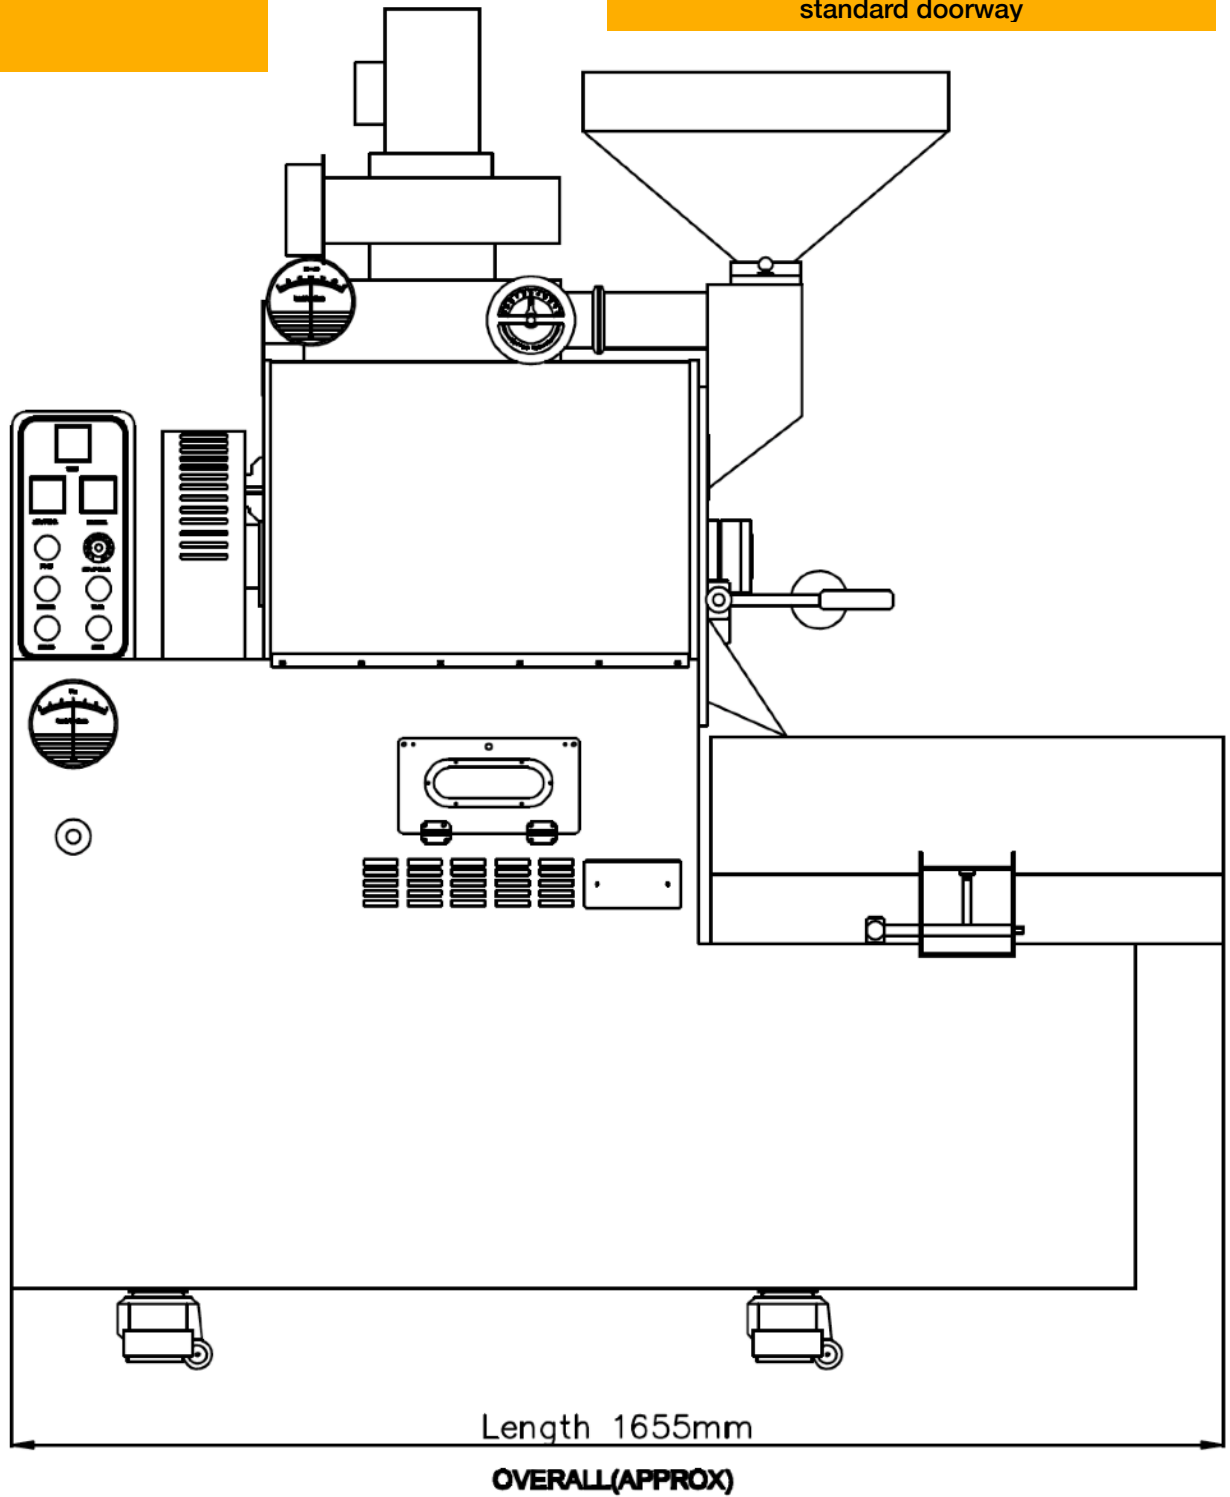


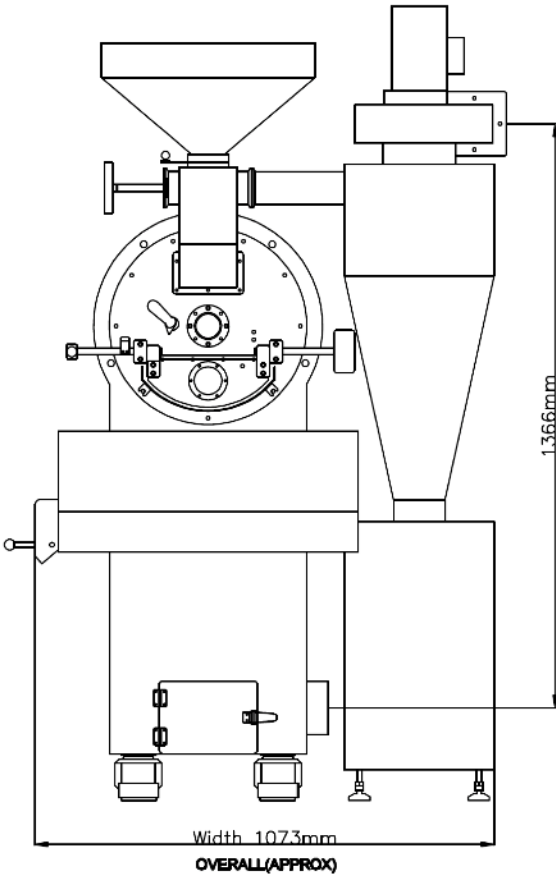

BC-25 FEATURES EITHER A 370W HD CHAFF FAN WITH A 5" PIPE CONNECTION OR IN SOME CASES A 180W CHAFF FAN


THE COOLING TRAY VENTING IS A 5" VENT SO YOU CAN USE A 6 TO 5 INCH REDUCER PIPE TO RUN 6" VENTING OUT OF BUILDING


BOTH VENTS ARE 5" BUT YOU CAN USE A 5" TO 6" REDUCER AND RUN 6" VENTING OFF EACH PIPE

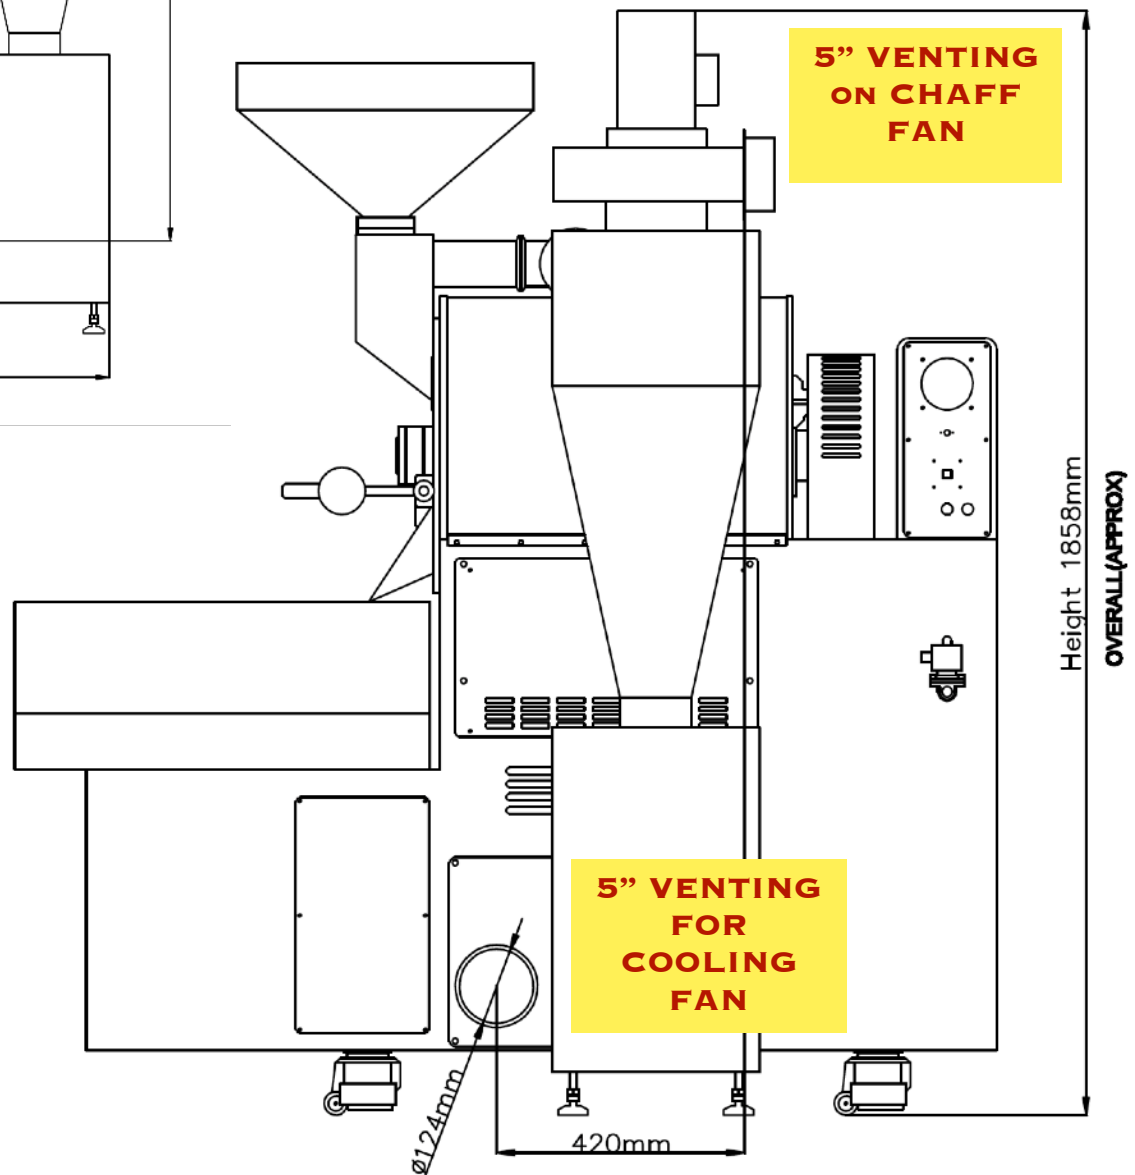

**CLEARANCE FROM ALL COMBUSTABLE
SURFACES:**

18-24" SPACE ON ALL SIDES

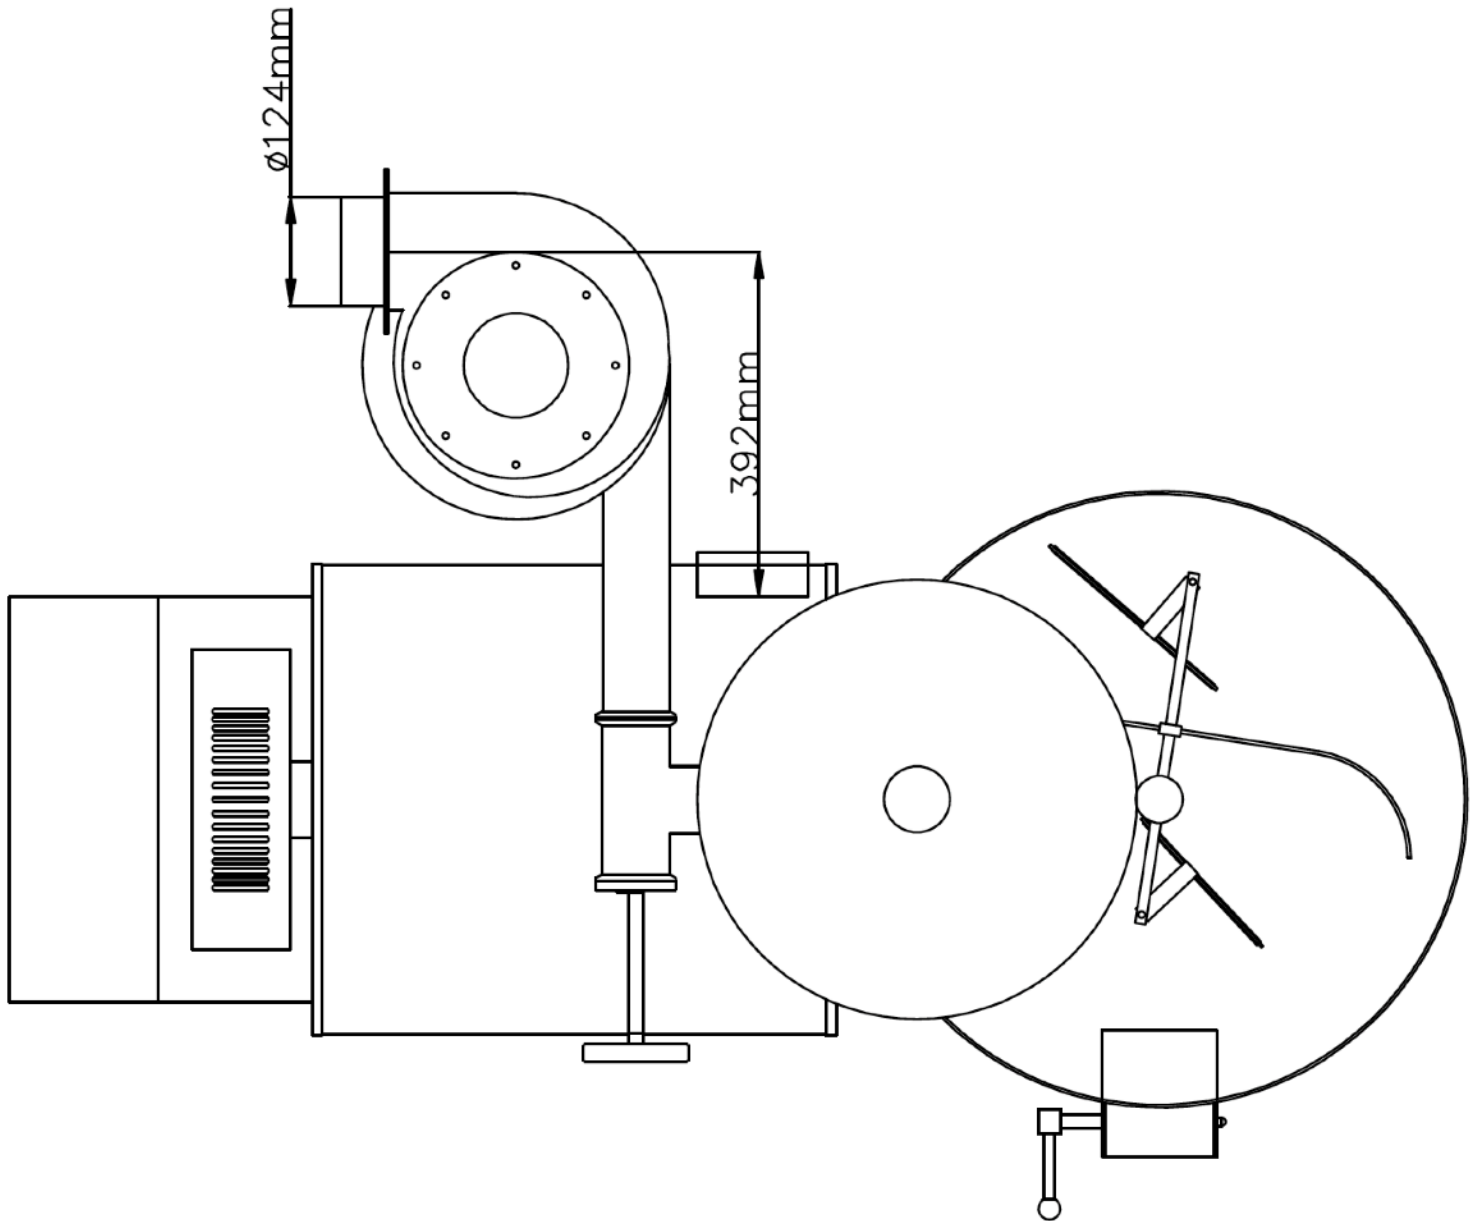



**IN 2022 WE ADD HEAVY DUTY
CHAFF FANS & HD GAS GAUGES
TO HELP LOWER MAINTENANCE
& INCREASE PRODUCTION!**




COLOR CHOICES:

**RED OR BLACK BODIES
(9 Housing Color Choices)**


SOLID COLORS



ROSE GOLD



STAINLESS



BLACK TITANIUM

CHECKERED



**CHECKERED
BLACK**



**CHECKERED
GOLD**



**CHECKERED
SILVER**

**SILVER
RAINDROP**



GOLD RAINDROP



**NEW FOR 2022:
HAMMERED GOLD**



BC-25 COMMERCIAL COFFEE ROASTER

*FLOOR MODEL WITH HD CASTER WHEELS
*DIRECT CONNECT CHAFF UNIT FOR SMALLER
FOOTPRINT
*CHOICE OF ALL ELECTRIC OR GAS MODELS

SIZE (LxWxH)	66x43x74"
WEIGHT	SHIPPING WEIGHT 1254LB
MINIMUM CLEARANCE FROM COMBUSTABLE MATERIALS	18-24"
ROASTING CAPACITY	5-25LB SINGLE WALL 2 TO 25LB DOUBLE WALL
ROAST TIME & ROASTS PER HOUR	9-14 MINUTES (5 ROASTS PER HOUR GAS. 3.5 PER HOUR ELECTRIC)
DRUM INFORMATION	SW DRUM: 5MM SUPERIOR 304SS CONTAINS 18% CHROMIUM AND 8% NICKEL DW DRUM: HAS TWO LAYERS: ONE OF 3MM & ONE 2MM 304SS WITH 6MM OF AIR CUSHION. SS WELDING (11MM TOTAL THICKNESS ON DW)
ELECTRIC STATS:	GAS MODEL: SINGLE PHASE 220V 50/60HZ 1200W REQUIRES STANDARD 15A BREAKER
ELECTRICAL PLUG TYPE	GAS MODELS: 20A 250V 3 WIRE NEMA 6-20P
FUEL CHOICES ON GAS MODELS	LPG GAS STANDARD WITH MODELS. NATURAL GAS CONVERSION KITS OFFERED FOR CUSTOMER INSTALLATION ONLY.
BURNER INFORMATION ON GAS MODELS	SW & DW BURNERS: 32
BTU REQUIRMENTS	125,000 BTU MINIMUM REQUIRED FOR NG LINE
GAS PRESSURE	LPG: 12-16WC (3-4KPA) MARSHALL 1912/197 REGULATOR RECOMMENDED NG: 7-14WC

EXHAUST SETUP	5" VENTING ON BOTH EXHAUSTS
EXHAUST PIPE REQUIREMENTS	POSITIVE PRESSURE EXHAUST VENTING WITH MINIMUM CLEARANCE 18-24" FROM COMBUSTABLE MATERIALS
MAXIMUM VENTING LENGTHS	20-25' FROM CHAFF UNIT. DEDUCT 3-5' FOR 45-90 DEGREE PIPE ELBOWS. IF YOU MUST VENT AT LONGER LENGTHS CONSULT A LOCAL TECHNICIAN ON USE OF POSSIBLE BOOSTER FANS
MAXIMUM EXHAUST TEMPERATURES	425-475F
CHAFF UNIT HIGH TEMP.	300-350F
COOLING TRAY HIGH TEMP.	200F
DATA LOGGING VIA ARTISAN OR CROPSTER	BUILT IN DATA LOGGER ATTACHES TO COMPUTER (PC OR MAC) VIA USB OR BLUETOOTH
K TYPE THERMOCOUPLES	BT & ET WITH TWO ADDITIONAL PREDRILLED CAPPED THREADED HOLES TO ADD OR ADJUST LOCATION OF PROBES
MANUFACTURED IN CHINA FOR BC ROASTERS	CUSTOM BUILT FOR BC SPECS IN USA AND OVER 200 LANDS

FOR MORE INFORMATION SEE:

BCROASTERS.COM

HTTP://WWW.BUCKEYECOFFEE.COM

**BC ROASTERS
BUCKEYE, ARIZONA 85326
TONOPAH, ARIZONA 85354**

**TOLL FREE: 844.522.6333
INFO@BUCKEYECOFFEE.COM**