



# BINTELLI



## Trio & M1 Display Manual

---

### C961



## Appearance and size

### Material & color

The C961 display is made of ABS and is designed to perform well under -20° to 60 ° C.

Available colors: Black.

Size (Unit: mm)



### Functions & buttons

#### Functions

The C961 offers many functions for your riding pleasure.

These Include:

Multiple Power levels settings (Mode)

Remaining Battery Capacity

Speed

Distance and Odometer (TRIP/ TOTAL)


Time

Assist walking (slow speed motor assist)

Backlight

Error codes

## Interface

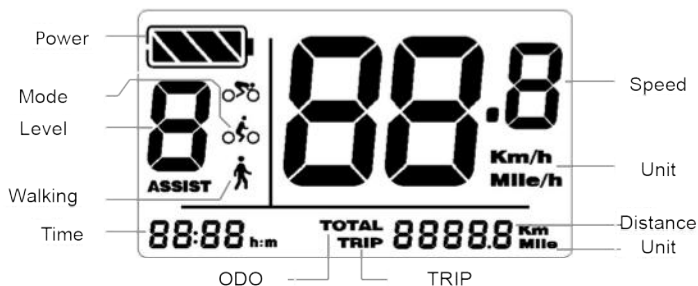

## Button

C961 includes a three button electronic control switch:



\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**Power on/off**

**+**

**-**

**Caution:** Do not plug in or unplug this display when the power to the unit is on.



Avoid collisions



Protect the display's membrane to provide water resistant performance.



Do not attempt to reset parameters if the display is not working.





Call for service if the C961 display is not working

## Installation



Install the display and button control on the handlebar and adjust its location. Plug it into the controller with power off.

## ON/OFF

To turn the unit on, press and hold the  button to start the display. A long press again  will switch it off.

**The display switches off automatically if there is no activity for five minutes (default).**



## Walking assist

Press and hold  to start the walking assist.  You will see the walking icon on the display and the motor will move the bicycle or vehicle at 4mph (6km/h).





**This function is designed for walking alongside only. Please do not use this function when riding.**

## Backlight

Press and hold  to turn on the C961's backlight screen.  
Press and hold  again to switch it off.

## Power Level

The display is integrated with the controller to provide several levels of power in Pedal Assist Mode (PAS). Press  or  to change the levels. The Default range is 0 - 5, where 0 means no output, and 5 means maximum output. The default switch on is level 0.

## Battery Capacity

Four sections highlights when battery is full.



Percentage of capacity for sections:





The battery icon flashes at 1 Hz when low power.

## Distance (trip and odometer)

Press  to shift between TRIP and TOTAL (Odometer).




## TRIP Reset

With the power on, Press and hold both  and  to clear TRIP distance.

## Error codes

When something goes wrong with system, an error code will flash on the display. Check details on attached list.

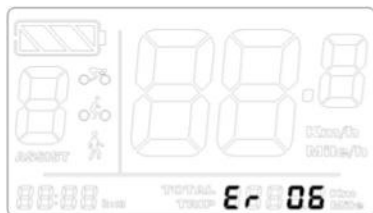

**The motor will stop working in the event of an error.  
Only when the error is gone, will the motor work again.**

### Error Codes:

Error code	Definition
04	Throttle not returning to zero state
05	Throttle abnormality
06	Low voltage protection
07	Over voltage protection
08	Hall sensor abnormality
09	Phase line abnormality
10	Controller overheat
11	Temperature sensor in controller abnormality
12	Current sensor abnormality
21	Speed sensor abnormality
22	Communication abnormality in BMS




# Display Settings



## Preparation


Makes sure the connections are good, then power on.

## Setting

Press and hold  to turn on the display. Press and hold the  and  to set the mode.

## Unit

Press  to change unit Km or Mile.

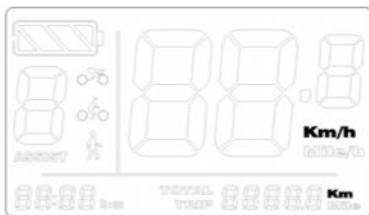

Press  to save and go to *set speed*.



## Setting the speed limit


To limit the speed range (from 10mph to 32mph (15-50Km/h)), press  $\oplus$  or  $\ominus$  to change the limit up or down.



Press  $\text{⏻}$  to save & go to *set backlight*

## Backlight


Press  $\oplus$  or  $\ominus$  to change the brightness (range is 1 to 8).

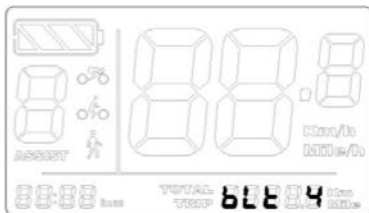

Press  $\text{⏻}$  to save & go to *time setting*.

## Time

Press  $\oplus$  or  $\ominus$  to change the hour, then press  $\text{⏻}$  to save & go to the minute setting. Press  $\oplus$  or  $\ominus$  to change the minutes.

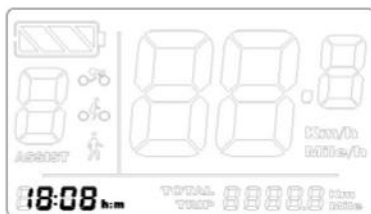


Press  $\text{⏻}$  to save & exit.



The settings go into effect after restart.


## Advanced setting

Press and hold  $\text{⏻}$  to start the display. Press and hold both  $\oplus$  and  $\ominus$  to enter setting mode

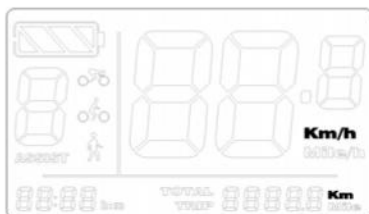

Press  $\oplus$  or  $\ominus$  and do not release, meanwhile press  $\text{⏻}$  eight times to go to the advanced setting menu.


## Wheel size setting

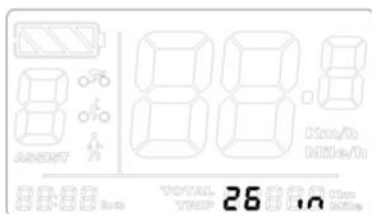

Press  $\oplus$  or  $\ominus$  to change the wheel size. Range from 8 to 32 inch. Press  $\text{⏻}$  to save & go to *sleep time interval* setting.

## Sleep time interval setting


Press  $\oplus$  or  $\ominus$  to change the time, range from 0 to 60 minutes.

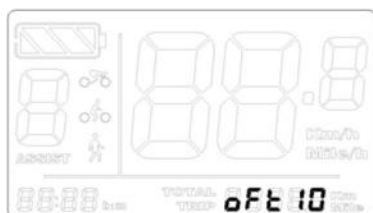


Display will sleep and cut off power after no operation on system for the selected time. Press  $\text{⏻}$  to save and skip to *level amount* setting.

## Power level amount setting

Press  $\oplus$  or  $\ominus$  to change the amount. The range is from 2 to 9 levels (excluding level 0).

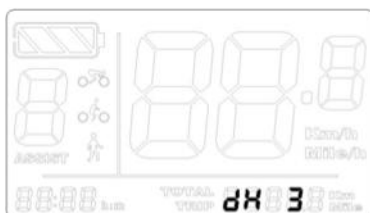


Press  to save and exit.




The settings go into effect after restart.

## FAQ

Q: Why does the display not power on?

A: Please check that the battery is connected and has power. Then check all the wires and connections. Then press the  button again. If this fails, please see your service technician.

Q: What should I do when an error code is displayed?

A: Please check the error code list. Sometimes powering down the unit (press ) , then unplugging the display, leave it unplugged for two minutes and then plugging it back in and turning it on will reset and correct the error. Please call your service technician if the user cannot remove the error.